

ROHS COMPLIANT

1.27mm Female Header Dual Row Angle Type




SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: Hi-Temp. Thermoplastic, UL 94V-0

Ordering Code:

FHCR02 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{D}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$

- ① Series No:
- ② No. of Contacts
02 To 100
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
D: Dual
- ⑤ Plastic High:
H: 4.3
Please mark the desired length in the H
- ⑥ Insulator Material
B: PA6T
C: LCP
D: PA46
- ⑦ Packing
A: Tray
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP

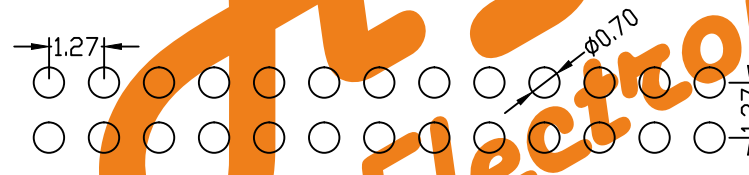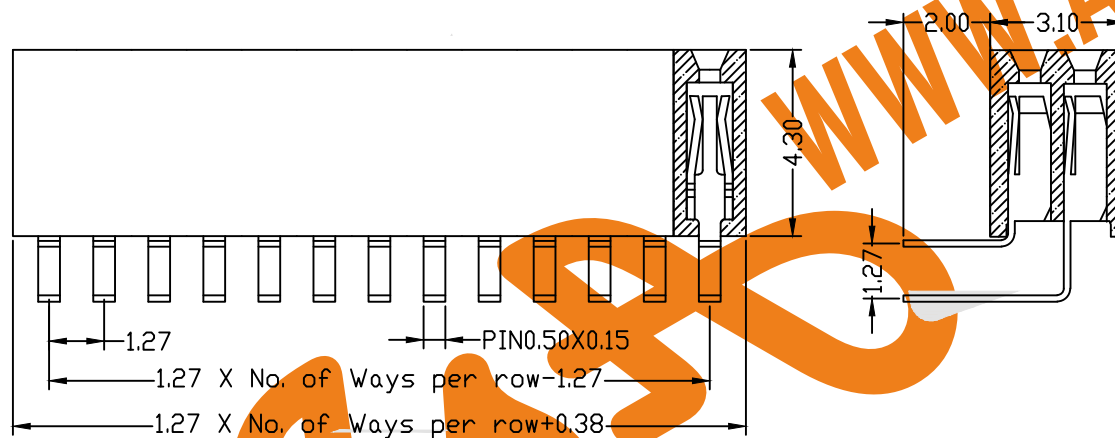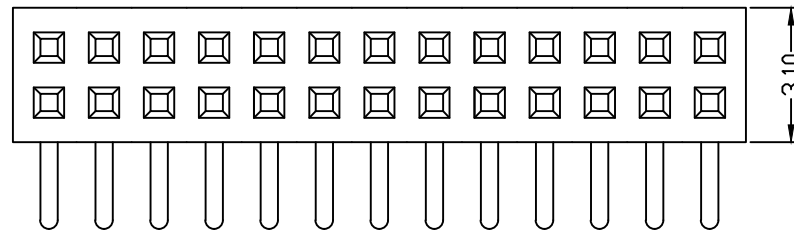


Unless Otherwise specified tolerance
 X: ±0.35
 X.X: ±0.25
 X.XX: ±0.20
 X.XXX: ±0.15

AsA WWW.AsA-Elec.com
Electronic
AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

SCALE: As Shown
 UNIT: mm

DRAWN: junfon H
 CHECKED: YANG



TITLE:
1.27mm Female Header Dual Row Angle Type
 DRAWING NO: FHCR02-XXDXXX
 PRODUCT NO: FHCR02-XXDXXX

REV	Add option of plating	10/8/1
DESCRIPTION	DATE	