

ROHS COMPLIANT

2.00mm Female Header Single Row SMT Type(W=2.5 H=4.0,4.6)



SPECIFICATION

Current Rating: 1.5Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

FHDM03 - X - X - S - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts 01 To 40
- ③ Contact Plating
 G0: Gold flash
 G1: 3u" Gold
 G2: 5u" Gold
 G3: 10u" Gold
 G4: 15u" Gold
 G5: 30u" Gold
 SN: Tin
- ④ Connector Type
 S: Single
- ⑤ Plastic High:
 H1: 4.0
 H2: 4.6
 Please mark the desired length in the H
- ⑥ Insulator Material
 A: PBT
 B: PA6T
 C: LCP
 D: PA46
- ⑦ Packing
 A: Tray
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP
- ⑧ Special Function
 A: Type A
 B: Type B

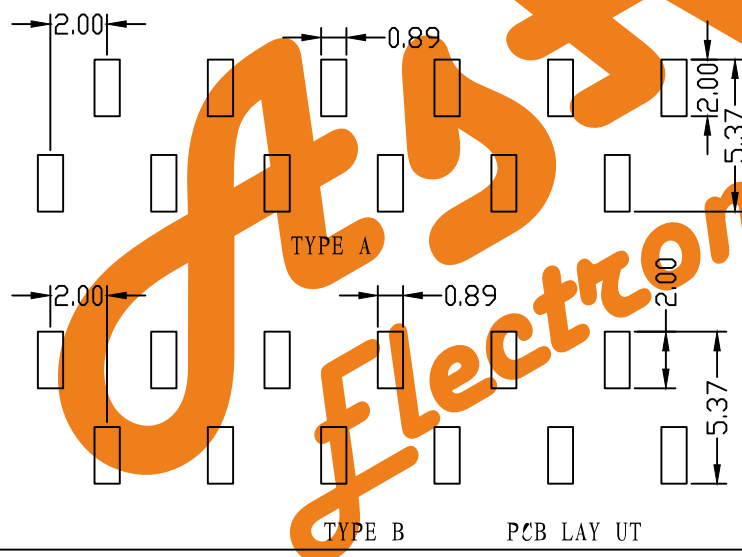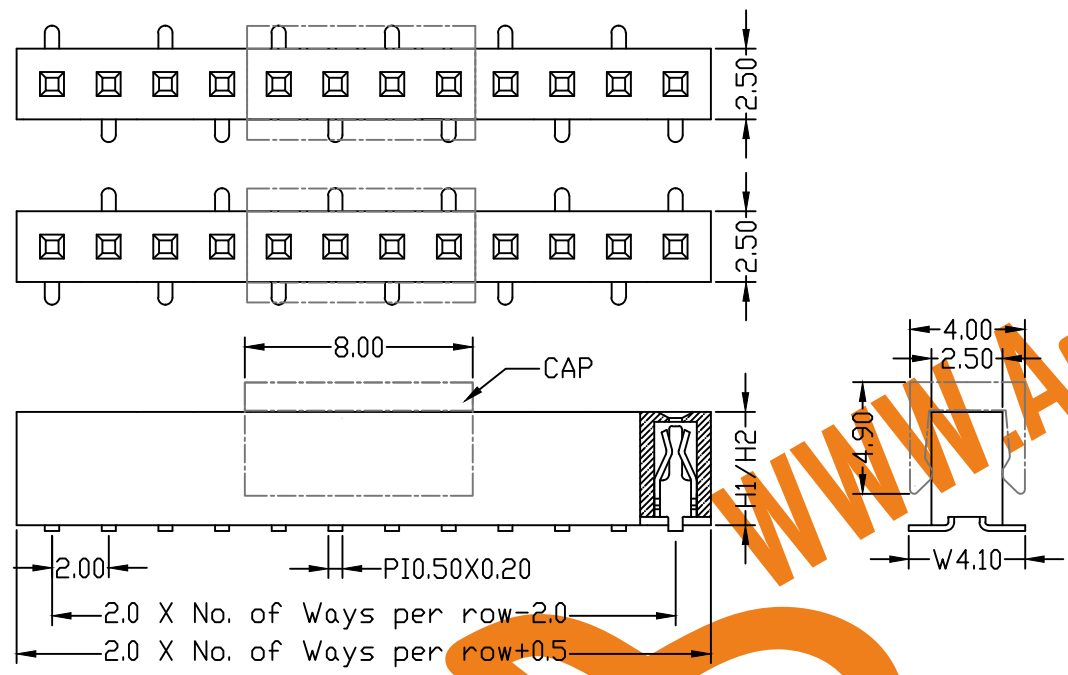


Unless Otherwise specified tolerance
 X: ±0.35
 X.X: ±0.25
 X.XX: ±0.20
 X.XXX: ±0.15

AsA WWW.AsA-Elec.com
Electronic
AsA Electronic Co.
 Tel: (+98) 21 66 73 56 82 Mob: (+98) 912 03 161 02

SCALE: As Shown UNIT: mm

DRAWN junf n H
 CHECKED YANG



TITLE:
 2.00mm Female Header Single Row SMT Type(W=2.5 H=4.0,4.6)
 DRAWING NO: FHDM03-XXSXXXX
 PRODUCT NO: FHDM03-XXSXXXX

REV	Add option of plating	10/8/1
	DESCRIPTION	DATE