

2.54mm Female Header Single Row Straight Type(W=2.5 H=11.0)

ROHS COMPLIANT

SPECIFICATION

Current Rating: 3.0 Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

FHES07 - X - X - S - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts
01 To 40
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
S: Single
- ⑤ Plastic High:
H: 11.0
Please mark the desired length in the H
- ⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
- ⑦ Packing
A: Tray
T: Tube
- ⑧ Pin
A Type1
B Type2

Unless otherwise specified tolerance
 X: ±0.35
 X.X: ±0.25
 X.XX: ±0.20
 X.XXX: ±0.15

AsA Electronic WWW.AsA-Elec.com
AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02


SCALE: As Shown
 UNIT: mm

DRAWN junf n H

CHECKED YANG



TITLE:
 2.54mm Female Header Single Row Straight Type H:11.0
 DRAWING NO: FHES07-XXSXXXX
 PRODUCT NO: FHES07-XXSXXXX

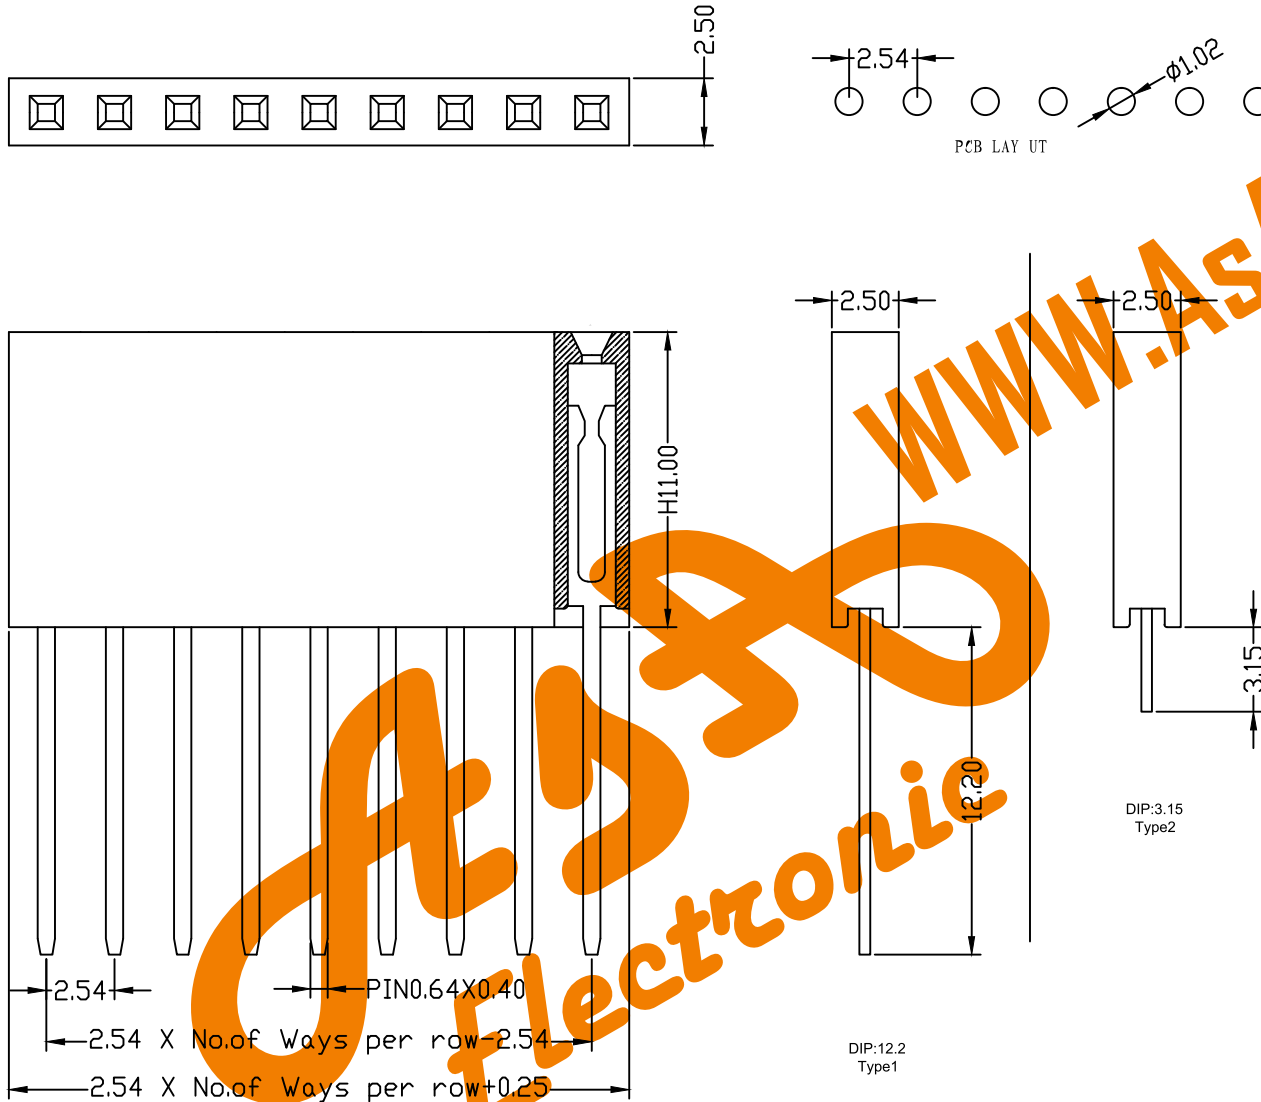

REV	DESCRIPTION	DATE
	Add option of plating	10/8/1