

ROHS COMPLIANT

2.54mm Female Header Dual Row Straight Type(W=5.0 H11.0)



SPECIFICATION

Current Rating: 3.0 Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black



Ordering Code:

FHES12 - X - X - D - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧


- ① Series No:
- ② No. of Contacts
02 To 80
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
D: Dual
- ⑤ Plastic High:
H: 11.0
Please mark the desired length in the H
- ⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
- ⑦ Packing
A: Tray
T: Tube
- ⑧ Option
A: Type1
B: Type2

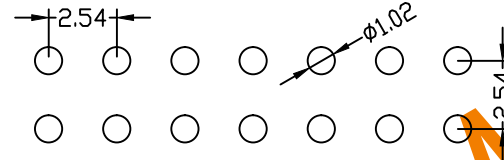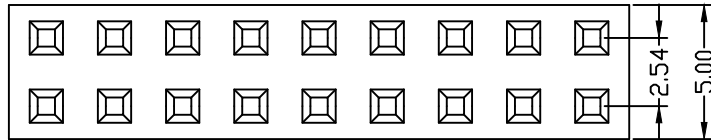

PCB LAYOUT

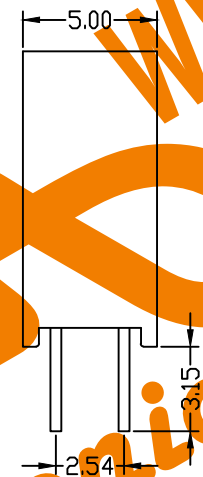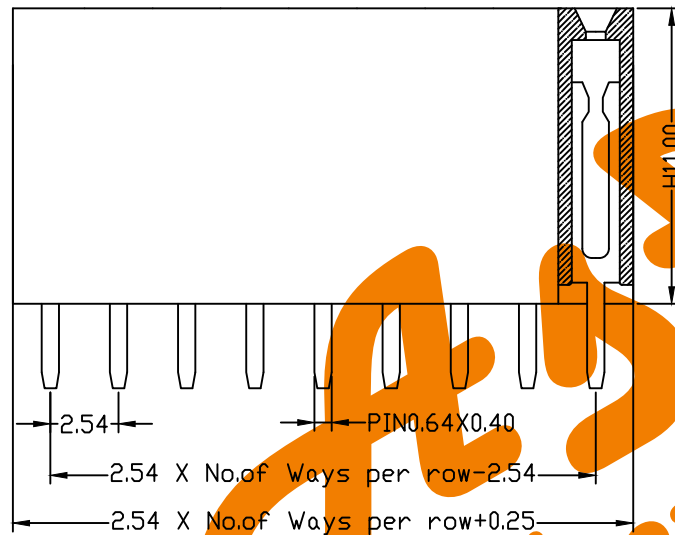

DIP: 3.15
Type2

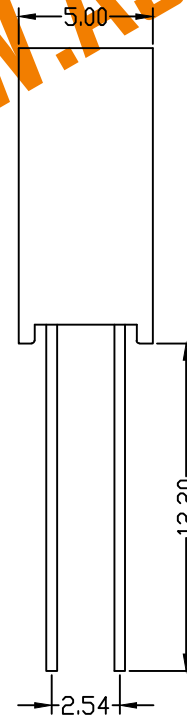

DIP: 12.2
Type1

Unless Otherwise specified tolerance
 X: ±0.35
 X.X: ±0.25
 X.XX: ±0.20
 X.XXX: ±0.15

SCALE: As Shown
 UNIT: mm

AsA Electronic Co.
 WWW.AsA-Elec.com
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02


DRAWN: junfon H

CHECKED: YANG

TITLE:
2.54mm Female Header Dual Row Straight Type H=11.0

DRAWING NO: FHES12-XXDXXX

PRODUCT NO: FHES12-XXDXXX



REV	DESCRIPTION	DATE
	Add option of plating	10/8/1