

ROHS COMPLIANT

1.00mm Female Header Single Row SMT Type




SPECIFICATION

Current Rating: 0.75Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: Hi-Temp. Thermoplastic, UL 94V-0

Ordering Code:

FHBM01 - X - X - S - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts
01 To 50
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
S: Single
- ⑤ Plastic High:
H2.1
Please mark the desired length in the H
- ⑥ Insulator Material
B: PA6T
C: LCP
D: PA46
- ⑦ Packing
A: Tray
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
- ⑧ Special Function
A: Type A
B: Type B

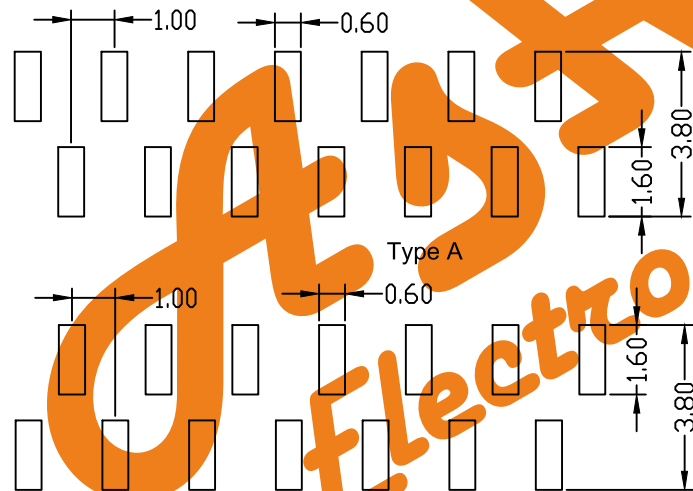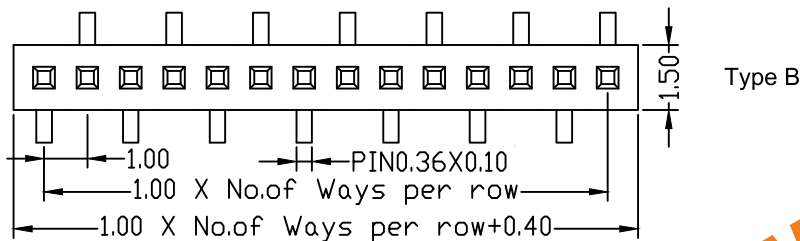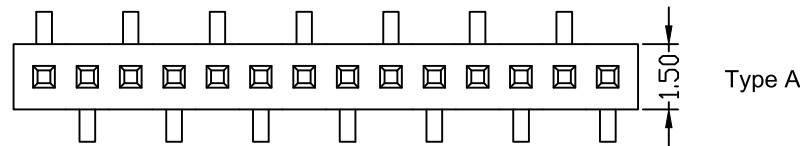

PCB LAYOUT Type B


Unless Otherwise specified tolerance
 X: ±0.35
 X.X: ±0.25
 X.XX: ±0.20
 X.XXX: ±0.15

AsA Electronic Co.
 WWW.AsA-Elec.com
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

SCALE: As Shown
 UNIT: mm

DRAWN: junfon H

CHECKED: YANG



TITLE:
1.00mm Female Header Single Row SMT Type

DRAWING NO: FHBM01-XXSXXXX

PRODUCT NO: FHBM01-XXSXXXX

REV	Add option of plating	10/8/1					
	DESCRIPTION	DATE					