




**△ SPECIFICATION**  
 Current Rating: 3A AC/DC  
 Voltage Rating: 250V AC Max.  
 Operation Temperature: -25°C~+85°C  
 Contact Resistance: 10 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Withstanding Voltage: 1000V AC/Minute  
 Contact: Brass, Tin Plated  
 Insulator: PA66(UL94V-0), White  
 RoHS Compliant

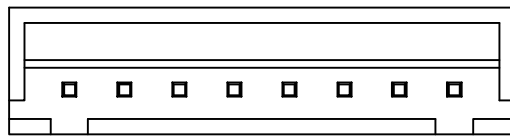


△




Recommended P.C.B. Layout

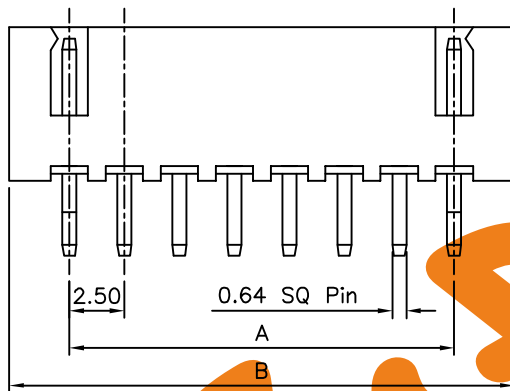


△ 3~12 Pin



△




△



△ 2 Pin

Pin	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50

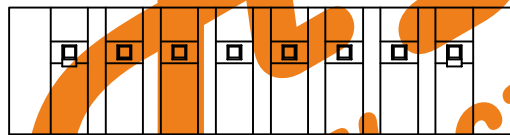

△

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
01600		EMILY		.X	±0.35
		CHECKED BY		.XX	±0.25
		DRAWING BY			
		WZL			
SCALE	NONE	REV.	A1	UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	02/23/2011
△ A0		NEW RELEASE	HZF	08/24/2009