


RECOMMENDED P.C BOARD PATTERN DIM. (REF.)

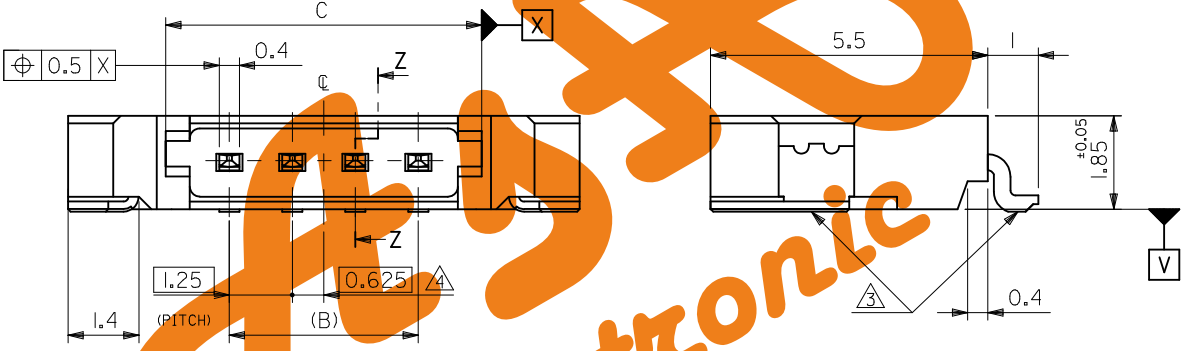

注記 NOTES

1. MATES WITH : 51146 SERIES
2. LOCKING WINDOW : ONE PLACE FOR 2 AND 3 CIRCUIT PRODUCTS AND TWO PLACES FOR MORE THAN 3 CIRCUIT PRODUCTS.
3. MISALIGNMENT OF SOLDER TAIL AND FITTING NAIL FROM [V] : UPPER DIRECTION 0.05MAX. : LOWER DIRECTION 0.15MAX. : OFFSET BETWEEN UPPER AND LOWER 0.1MAX. (UNDER 20 CKTS.)
4. APPLY EVEN CIRCUIT PRODUCTS.
5. MATERIAL  
 WAFER : PPS , UL94V-0  
 PIN : PHOSPHOR BRONZE  
 CONTACT AREA : GOLD 0.2 MICROMETER MINIMUM  
 TAIL AREA : TIN 3.0 MICROMETER MINIMUM  
 UNDER PLATING : NICKEL 1.0 MICROMETER MINIMUM  
 FITTING NAIL : PHOSPHOR BRONZE  
 TIN 3.0 MICROMETER MINIMUM  
 UNDER PLATING : NICKEL 1.0 MICROMETER MINIMUM
6. 53780- \*\* 10 / - \*\* 18  
 THIS PRODUCT IS LEAD FREE OF 53780- \*\* 10 / - \*\* 18.
7. ELV & RoHS COMPLIANT.

16.25	22.5	38.77	36.25	42.65	53780-3070	30
8.75	22.5	26.27	23.75	30.15	-2070	20
7.5	20	23.77	21.25	27.65	-1870	18
6.25	16.25	20.02	17.5	23.9	-1570	15
5	15	18.77	16.25	22.65	-1470	14
3.75	12.5	16.27	13.75	20.15	-1270	12
2.5	10	13.77	11.25	17.65	-1070	10
2.5	8.75	12.52	10	16.4	-0970	9
1.25	7.5	11.27	8.75	15.15	-0870	8
1.25	6.25	10.02	7.5	13.9	-0770	7
--	5	8.77	6.25	12.65	-0670	6
--	3.75	7.52	5	11.4	-0570	5
--	2.5	6.27	3.75	10.15	-0470	4
--	--	5.02	2.5	8.9	-0370	3
--	--	3.77	1.25	7.65	53780-0270	2
E	D	C	B	A	EMBOSSED PACKAGE	CKT.
					オーダー番号 ORDER No.	極数

REVISED EC NO: J2010-1927 DRWN: KUROSE 2010/03/25 CHKD: KASAKAWA 2010/03/26 APPR: NUKITA 2010/03/29	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	± 0.2	DRAWN BY T. UENO	DATE '04/04/15	 WWW.AsA-Elec.com AsA Electronic Co. Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02		
	10 OVER 30 UNDER	± 0.25	CHECKED BY H.Z	DATE '04/04/15			
	30 OVER	± 0.3	APPROVED BY M. SASAO	DATE '04/04/15			
ANGULAR ± 3 °		MATERIAL NO.					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART					
REV	DESCRIPTION	SIZE A3					