

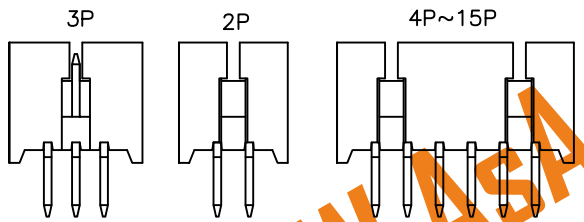
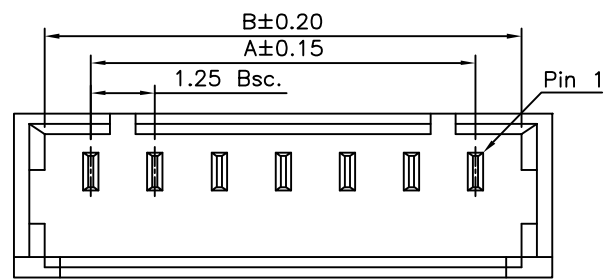


△ Recommended P.C.B. Layout  
(PCB Board Tolerance ±0.05)

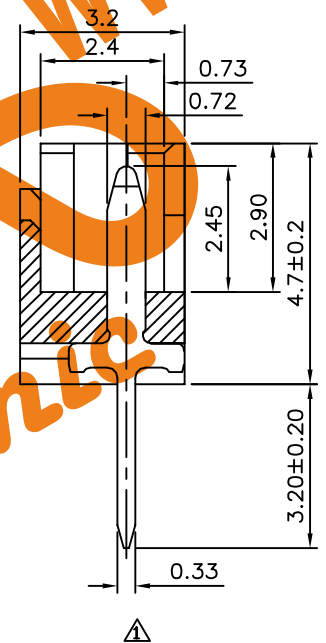

△ Lock Window View

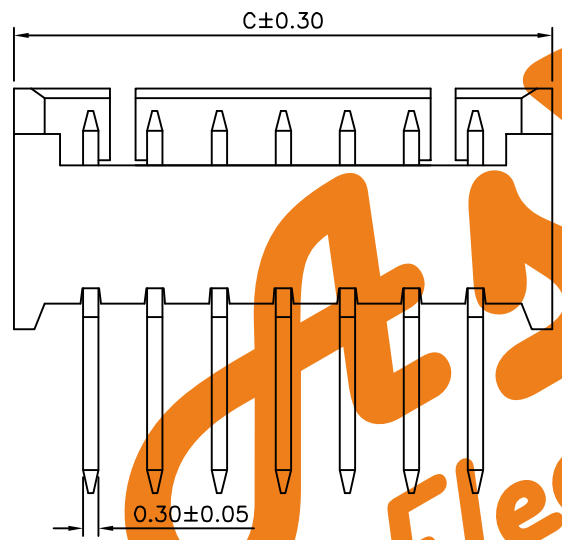

△ SPECIFICATION

Current Rating: 1A  
 Voltage Rating: 125V AC  
 Dielectric Voltage: 250V AC For One Minute  
 Contact Resistance: 20 Milliohms Max.(Initial)  
 40 Milliohms Max.(Final)  
 Insulation Resistance: 100 Megaohms Min. At 500V  
 Operation Temperature: -25°C ~ +85°C  
 Insulator: PA46(UL94V-0), Nature  
 Contact: Brass, Tin Plated Over Nickel  
 RoHS Compliant

Pin	A	B	C
02	1.25	3.05	4.25
03	2.50	4.30	5.50
04	3.75	5.55	6.75
05	5.00	6.80	8.00
06	6.25	8.05	9.25
07	7.50	9.30	10.50
08	8.75	10.55	11.75
09	10.00	11.80	13.00
10	11.25	13.05	14.25
11	12.50	14.30	15.50
12	13.75	15.55	16.75
13	15.00	16.80	18.00
14	16.25	18.05	19.25
15	17.50	19.30	20.50

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15
01201		EMILY		
		CHECKED BY H.Z		
		DRAWING BY YBL		
SCALE	NONE	REV.	B1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ B1		Modify Data	HZF	12/04/2013
△ B0		NEW RELEASE	HZF	12/10/2009