

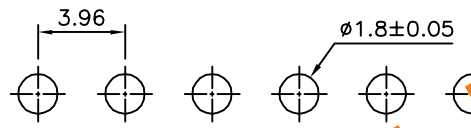


SPECIFICATION
 Current Rating:5A AC/DC
 Voltage Rating:250V AC/DC
 Operation Temperature:-25°C~+85°C
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Dielectric Withstanding Voltage:1500V AC/Minute
 Insulator:PA66(UL94V-2),Nature
 Contact:Brass,Tin Plated
 RoHS Compliant

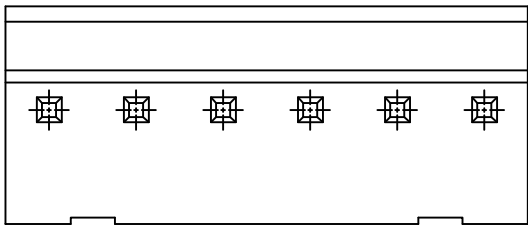

Recommended P.C.B. Layout

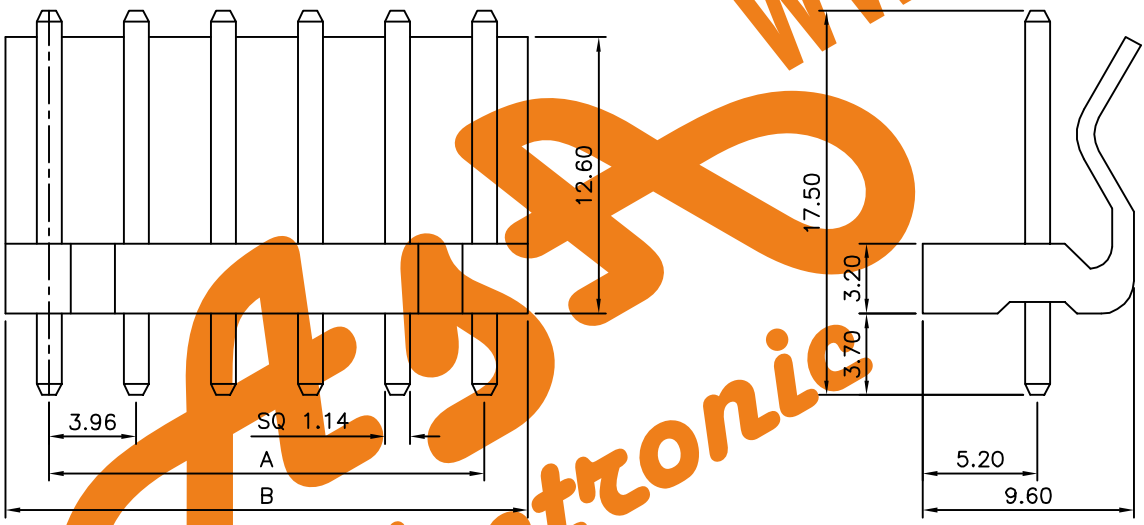

Pin	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.86
9	31.86	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20

AsA Electronic
 WWW.AsA-Elec.com
 AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

APPROVED BY EMILY
 CHECKED BY H.Z
 DRAWING BY QQJ
 telegram: 09396994470
 SCALE NONE REV. B1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.50
 .XX ±0.35
 ANG.
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify Data	HZF	10/04/2013
△	B0	NEW RELEASE	HZF	10/16/2010