
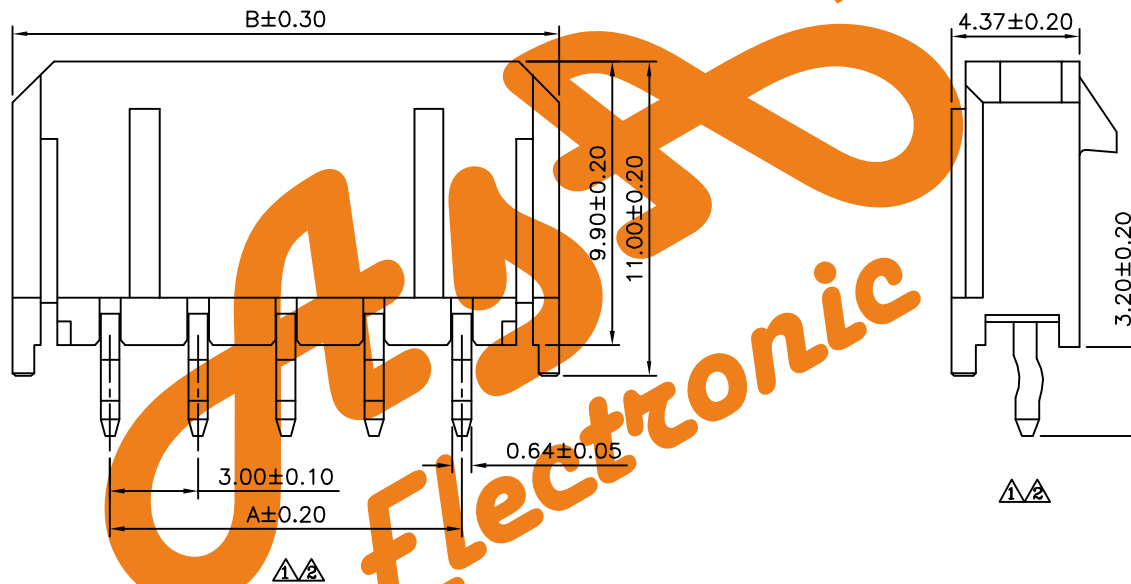


Recommended P.C.B. Layout

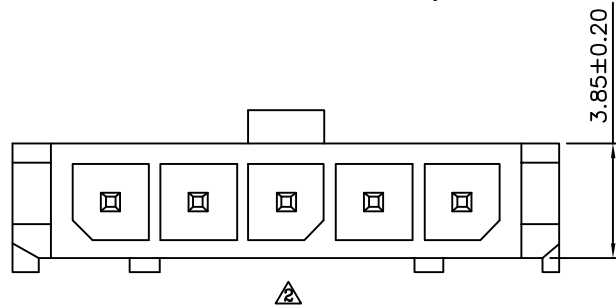

SPECIFICATION

- 1. **General Characteristics**
3.0mm Micro-Fit Wafer 1XXX DIP 180° With Post Black Insulator Tin Plated
- 2. **Material&Finish**
Housing: PA66+15%G.F.(UL94V-0), Black
Contact: Brass, Tin Plated
- 3. **Electrical Characteristics**
Current Rating: 5A AC/DC
Voltage Rating: 250V AC/DC
Contact Resistance: 10 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Withstand Voltage: 1500V AC/Minute
- 4. **Environmental Characteristics**
Temperature Range: -25°C ~ +85°C
- 5. **RoHS Compliant**

Pin	A	B
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

AsA Electronic
WWW.AsA-Elec.com
AsA Electronic Co.
Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02


telegram:
09396994470

APPROVED BY MEI
CHECKED BY H.zarafshan
DRAWING BY HAO


UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

SCALE NONE REV. A2 UNIT mm


NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	03/02/2015
A1		Modify Data	HZF	10/22/2013
A0		NEW RELEASE	HZF	10/23/2012

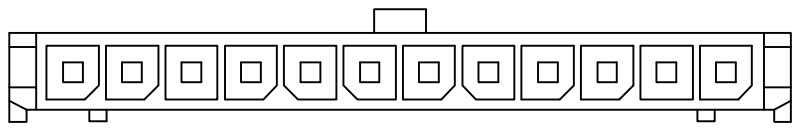


1X12P

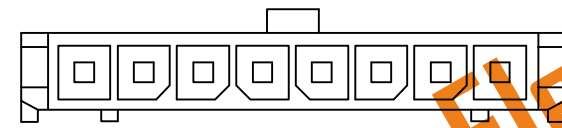

1X08P




1X04P

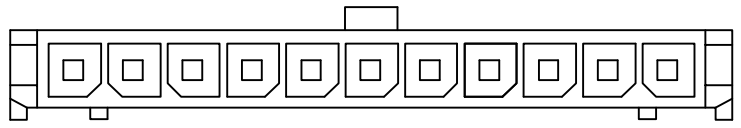


1X11P




1X07P




1X03P

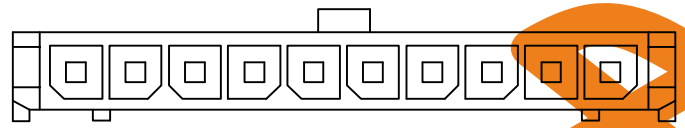


1X10P

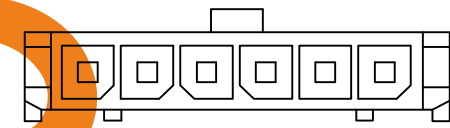


1X06P



1X02P

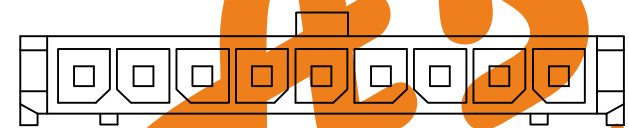

1X09P

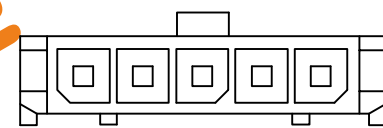

1X05P

AsA Electronic
 WWW.AsA-Elec.com
 AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

Telegram:
 09396994470

APPROVED BY MEI
 CHECKED BY H.zarafshan
 DRAWING BY HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.30
 .X ±0.25
 .XX ±0.20
 .XXX ±0.015

SCALE NONE

REV. A2



NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	03/02/2015
A1		Modify Data	HZF	10/22/2013
A0		NEW RELEASE	HZF	10/23/2012