


ROHS COMPLIANT

AT2500F - 3.5/3.81 - XX - X - X -CG



Series No.

Pitch: Poles: Insulator color: Customer Request
 3.5:3.5mm 02: 2 Contacts A:Green
 3.81:3.81mm 03: 3 Contacts B:Blue
 C:Black
 16: 16 Contacts

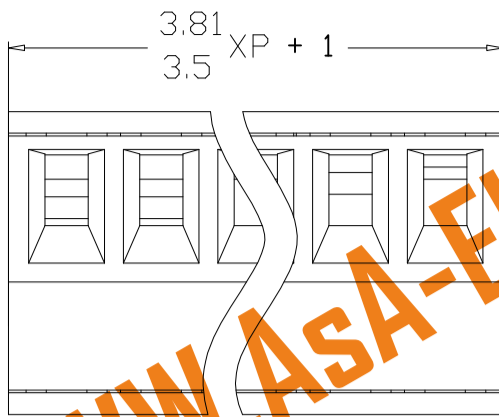

SPECIFICATION

Voltage Rating : 300V
 Current Rating : 12A
 Wire range : 18-12AWG 2.5mm²
 Housing : PA66+23%GF, UL94V-0
 Terminal : Phosphor Bronze, Nickel Plated
 Wire Cage : Brass.Nickel Plated
 Screw : Steel, M3.0 Ni-Plated
 Torque : 0.4N.m

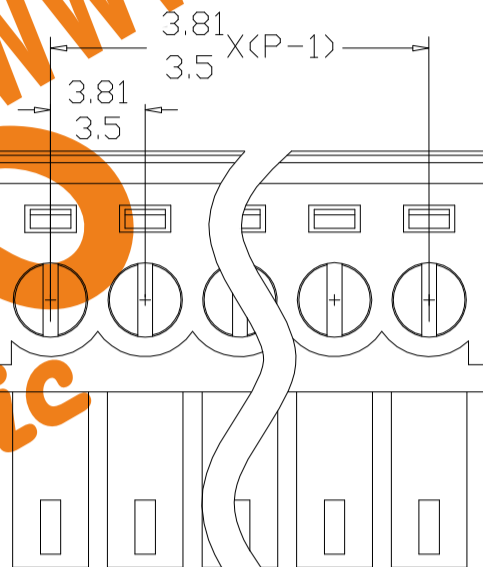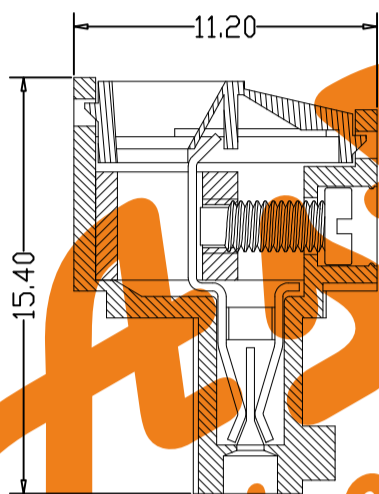

Unless Otherwise specified tolerance
 X:±0.35
 X.X:±0.25
 X.XX:±0.20
 X.XXX:±0.15


WWW.AsA-Elec.com
AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

SCALE: 1:1

UNIT: mm

DRAWN: huangzhen

TITLE: Plug-in Terminal Block Pitch:3.5/3.81
 CHECKED: H.Z



DRAWING NO: AT2500F-3.5/3.81XXXX-CG
 PRODUCT NO: AT2500F-3.5/3.81XXXX-CG




telegram:09396994470

REV	DESCRIPTION	DATE
1	Add option of plating	13/9/26

ROHS COMPLIANT

SPECIFICATION

Voltage Rating : 125V
 Current Rating : 8A
 Housing : PA66+23%GF, UL94V-0
 Terminal : Brass.Tin Plated

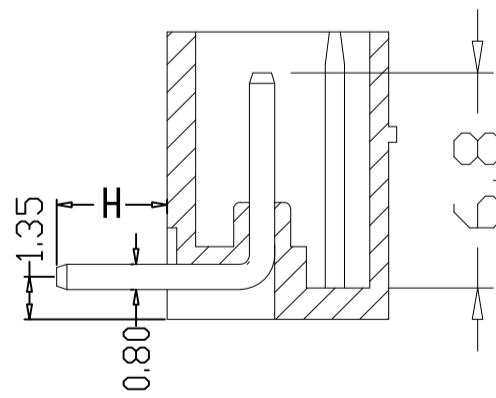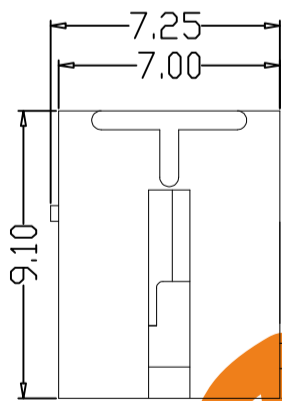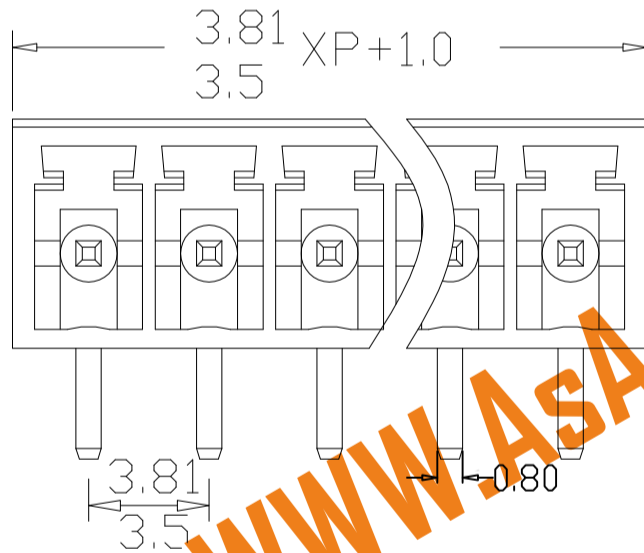

AT2500R - 3.5/3.81 - XX - X - X - X -FG

Series No.

Pitch: Poles: Insulator color: Option Customer Request
 3.5: 3.5mm 02: 2 Contacts A:Green A:Type1 H=3.5±0.20
 3.81: 3.81mm 03: 3 Contacts B:Blue B:Type2 H=2.6±0.20
 C:Black
 16: 16 Contacts

Unless Otherwise specified tolerance
 X:±0.35
 X.X:±0.25
 X.XX:±0.20
 X.XXX:±0.15


WWW.AsA-Elec.com
AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

SCALE: 1:1

UNIT: mm

DRAWN: huangzhen

TITLE: Plug-in Terminal Block Close Right-Angle Pitch:3.5/3.81
 CHECKED: H.Z



DRAWING NO: AT2500R-3.5/3.81XXXX-FG
 PRODUCT NO: AT2500R-3.5/3.81XXXX-FG

telegram:09396994470

REV	DESCRIPTION	DATE
1	Add option of plating	13/10/15