

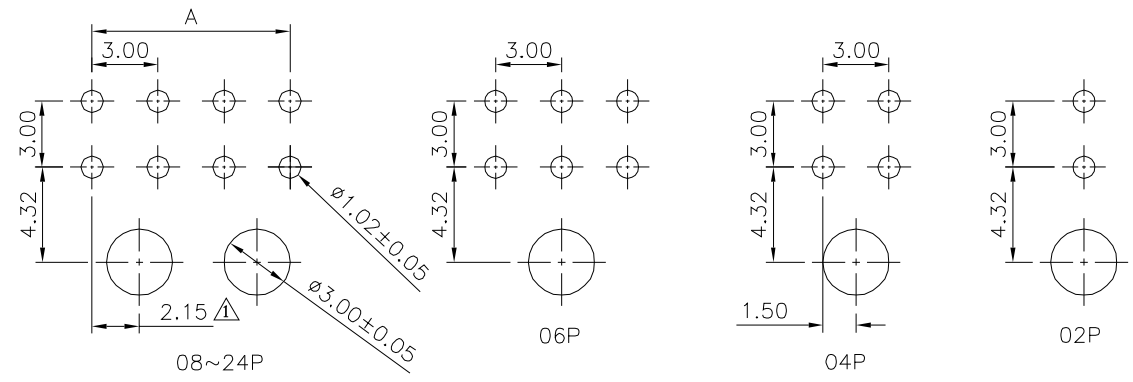
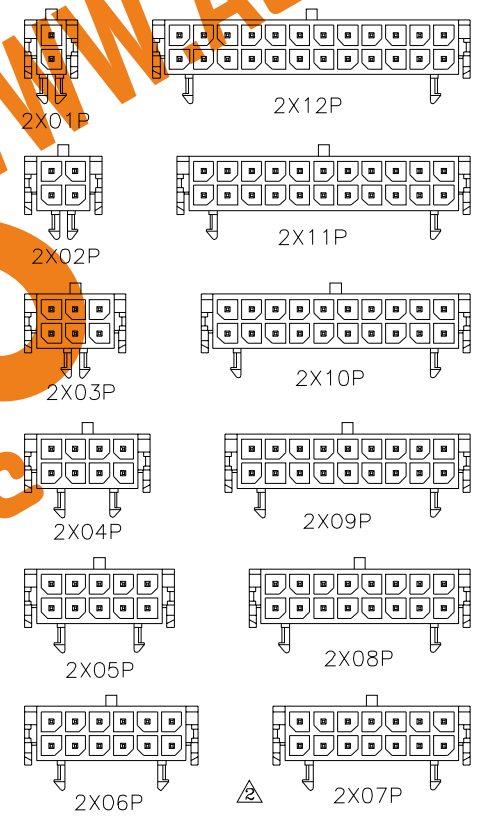


SPECIFICATION

- General Characteristics**
3.0mm Micro-Fit Wafer 2XXX DIP 90° With Post Black Insulator Tin Plated
- Material&Finish**
Insulator:PA66+15%G.F.(UL94V-0),Black
Contact:Brass,Tin Plated
- Electrical Characteristics**
Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Withstanding Voltage:1500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
- Environmental Characteristics**
Temperature Range:-25°C~+85°C
- RoHS Compliant**

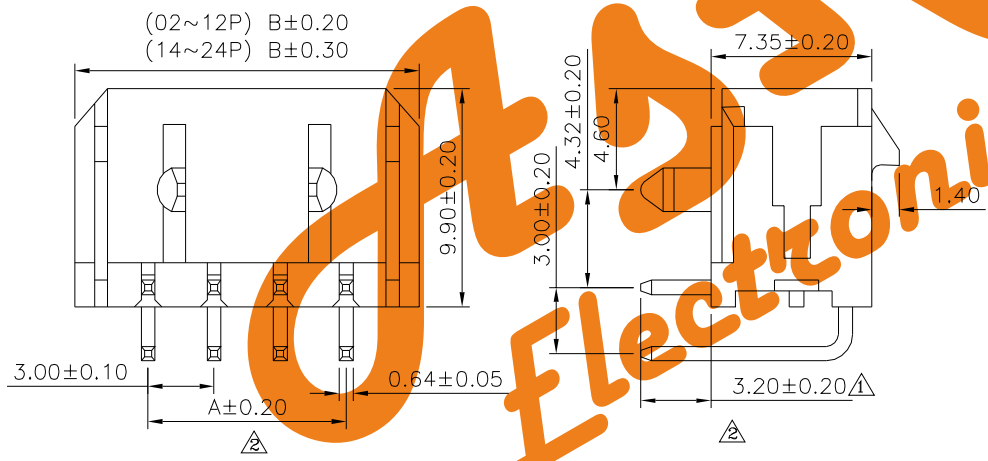

Recommended P.C.B. Layout

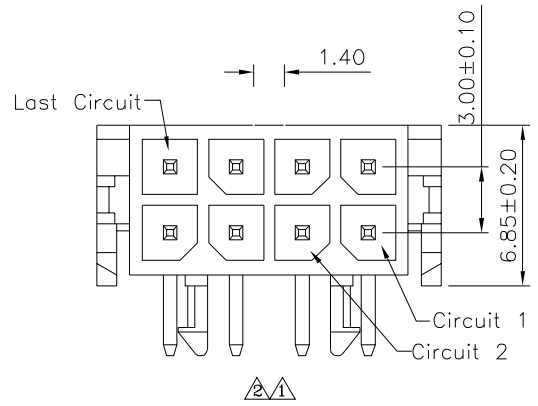

Pin	A	B
02	—	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

AsA Electronic Co.
WWW.AsA-Elec.com
Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP
SCALE NONE
REV. A2
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:
X ±0.30
XX ±0.25
XXX ±0.20
ANG. ±1°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	09/28/2017
A1		Modify Data	HZF	08/28/2013
A0		NEW RELEASE	HZF	11/16/2011