

**SPECIFICATION**



**1.General Characteristics**  
 3.0mm Micro-Fit Wafer 2XXX DIP 180°  
 With Post Black Insulator Tin Plated

**2.Material&Finish**  
 Housing:PA66+15%G.F.(UL94V-0),Black  
 Pin:Brass,Tin Plated

**3.Electrical Characteristics**  
 Current Rating:5A AC,DC  
 Voltage Rating:250V AC,DC  
 Contact Resistance:10 Milliohms Max.  
 Insulation Resistance:1000 Megohms Min.  
 Withstand Voltage:1500V AC/Minute

**4.Environmental Characteristics**  
 Temperature Range:-25°C~+85°C

**5.RoHS Compliant**

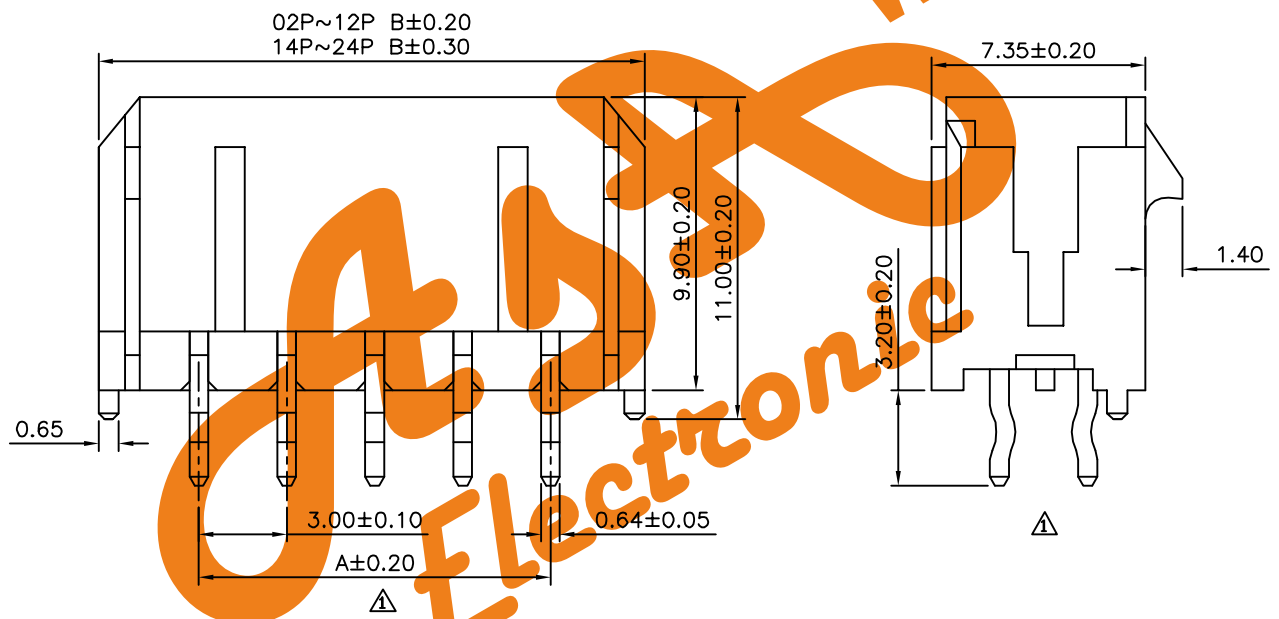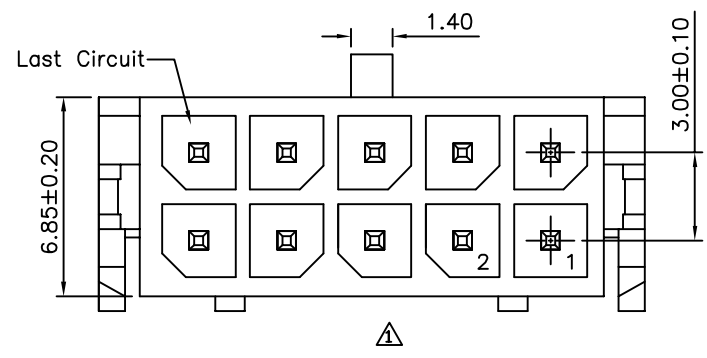

Pin	A	B
02	—	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65


**AsA Electronic**  
 WWW.AsA-Elec.com  
 AsA Electronic Co.  
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY CYP


UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.30  
 .X ±0.25  
 .XX ±0.20  
 .XXX ±0.015

SCALE NONE REV. A1 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	11/28/2014
△A0		NEW RELEASE	HZF	06/22/2012

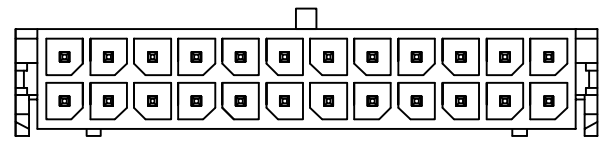


2X12P

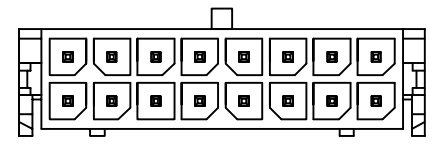

2X8P




2X4P

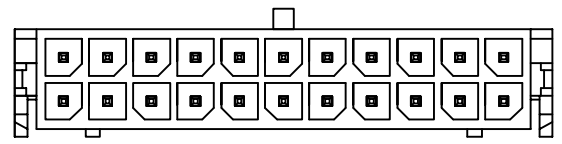


2X11P




2X7P




2X3P

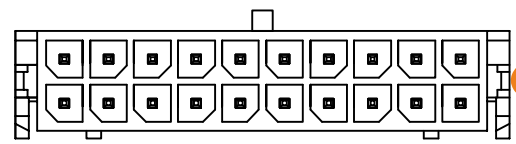

2X10P




2X6P




2X2P



2X9P



2X5P



2X1P

www.ASA-Elec.com

ASA Electronic



**ASA** *Electronic* [www.ASA-Elec.com](http://www.ASA-Elec.com)  
**AsA Electronic Co.**  
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

I		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.015
telegram: 09396994470		EMILY		
		CHECKED BY HZF		
		DRAWING BY CYP		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	11/28/2014
△ A0		NEW RELEASE	HZF	06/22/2012