
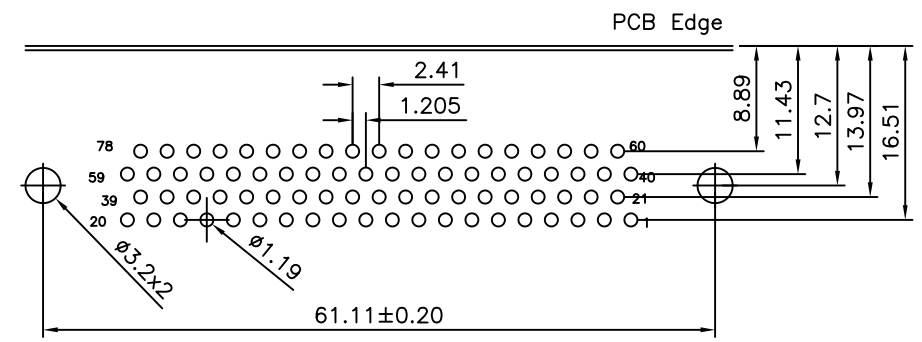
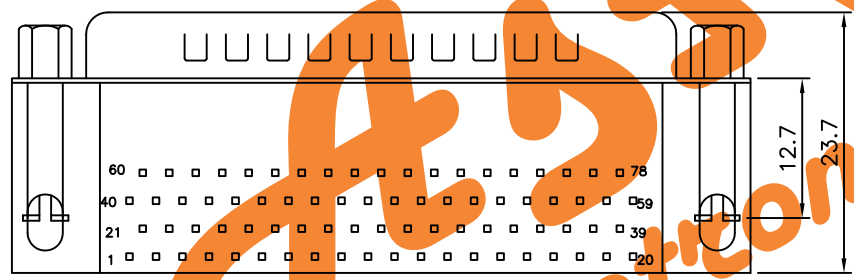
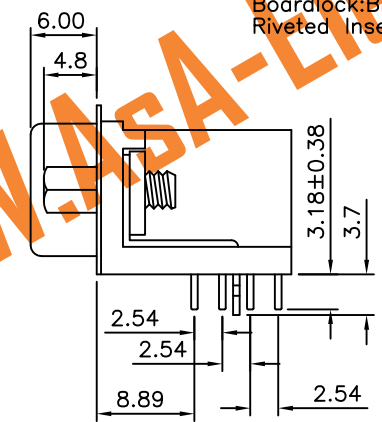


SPECIFICATION

Current Rating: 2Amp
 Dielectric Withstanding Voltage: 1000V AC For 1Minute
 Insulation Resistance: 1000Megohms Min At 500V DC
 Contact Resistance: 15Milliohms Max
 Operating Temperature: -55°C ~ +105°C
 Insulator: PBT UL 94V-0
 Contact: Copper Alloy
 Contact Finish: Gold On Mating End Tin On Termination End
 With Entire Contact Nickel Underplated
 Shell: Steel
 Boardlock: Brass Tin Plated
 Riveted Insert: Brass Nickel Plated

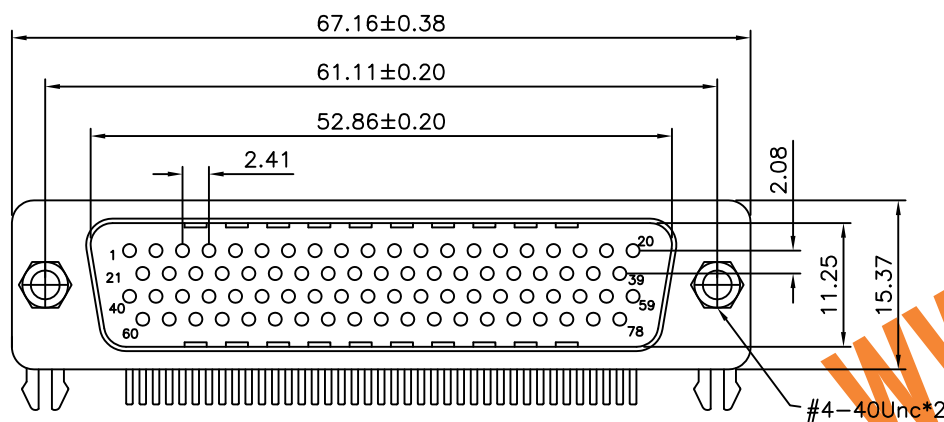

APPROVED BY		MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANG: ±1°
CHECKED BY		HZF	
DRAWING BY		JLT	
SCALE	NONE	REV.	
UNIT	mm	REV.	NO.

UNIT	mm	REV.	A0	NO.	REV.	NO.	REV.	NO.	REV.
				NEW RELEASE			HZF	04/30/2007	
				REVISIONS	CHK	DATE			