
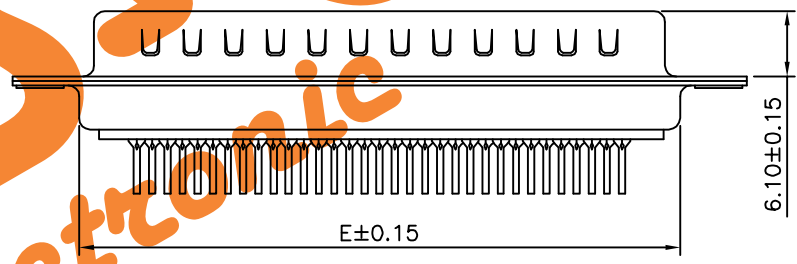


Recommended P.C.B. Layout

SPECIFICATION
 Current Rating:5 Amps
 Withstanding Voltage:1000V(One Minute)
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-50°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 Shell:SPCC,Front:Nickel Plated,Rear:Tin Plated
 RoHS Compliant

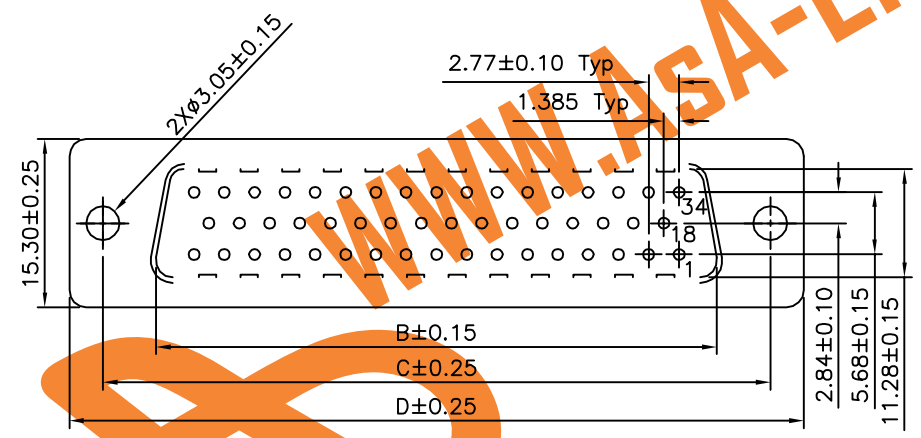

50 Pin

Pin	B	C	D	E
50	52.81	61.00	67.00	55.10

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .X' ±3' .XX ±0.25 .XX' ±1' .XXX ±0.05 .XXX' ±0.5'
02876		MEI		
		HZF		
		DRAWING BY		UNIT mm
		WSS		
SCALE	NONE	REV.	A0	

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	07/06/2011