


PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I/O

- 一: 材质:
- 1、胶芯: LCP, UL 94 V - 0, 黑色
  - 2、端子: 磷铜
  - 3、外壳: 不锈钢

- 二: 技术参数:
- 接触电阻: 50 mΩ Max
  - 绝缘电流: 1000mA Min (500V)
  - 额定电流: 每个接触件1A Max
  - 额定电压: 30V Max (DC)
  - 耐压: 500V r.m.s/min
  - 使用温度: -25℃~65℃
  - 湿度: 0%~95%
  - 寿命: 5000次/MIN

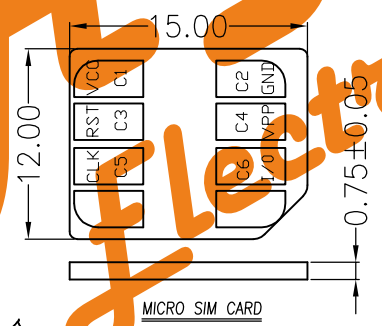

三: 电镀规格: 镍底30-50 U/Min 全部, 焊脚锡50 U/Min, 接触点金

**AsA Electronic**  
 WWW.AsA-Elec.com  
 AsA Electronic Co.  
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

**Telegram:09396994470**

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				

DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE DIMENSION TOLERANCE X.X: ± 0.15 X.XX: ± 0.10 X.XXX: ± 0.05 ANGULAR: ± 1°	PRODUCT NAME :	MICRO-SIM 卡座掀盖式 1.80H	DRAWING:	DATE:	2014/04/10	
	PRODUCT NO. :		CHECK:	H.Z	DATE:	2014/04/11
	DRAWING NO. :		APPROVED:		DATE:	2014/04/11
	SCALE: 1:1	DWG ID: C_D	REV.: A	PAGE: 1 OF 1		