







WWW.ASA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

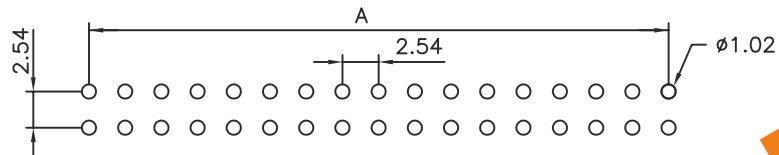

PCB LAYOUT - COMPONENT VIEW

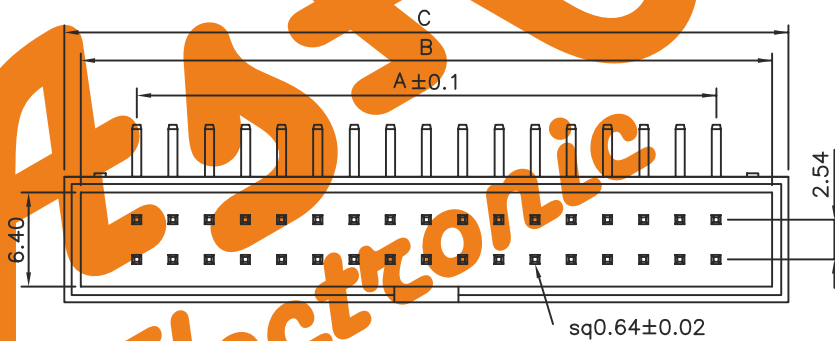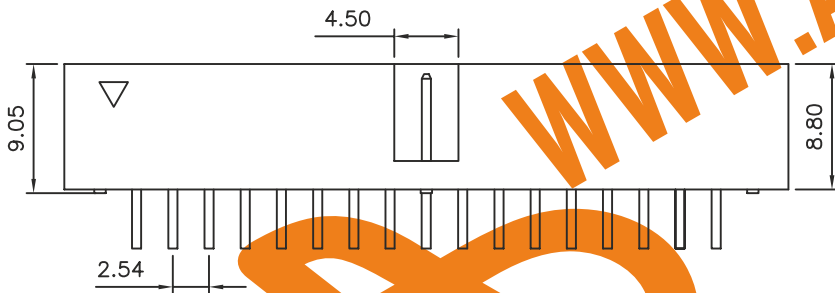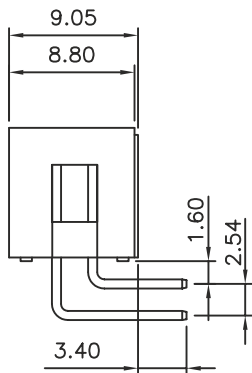

TECHNICAL CHARACTERISTICS

MATERIAL  
 INSULATOR: PA 6T  
 COLOR: BLACK  
 CONTACT MATERIAL: COPPER ALLOYS  
 CONTACT TYPE: STAMPED  
 CONTACT PLATING: GOLD  
 QUALITY CLASS: 3 AS PER CECC 75 301-802  
 PITCH: 2.54MM

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -40 UP TO 125°C  
 FLAMABILITY RATING: UL94-V0  
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
 CURRENT RATING: 3 A MAX  
 WORKING VOLTAGE: 250 VAC  
 INSULATOR RESISTANCE: >1000 MOHM  
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/MN  
 CONTACT RESISTANCE: 20 MOHM MAX

SOLDERING  
 JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING  
 TRAY

DIMENSION

NB PIN	A	B	C
6	5.08	12.80	15.20
8	7.62	15.48	17.78
10	10.16	17.90	20.30
14	15.24	22.98	25.38
16	17.78	25.52	27.92
20	22.86	30.60	33.00
26	30.48	38.22	40.62
34	40.64	48.40	50.80
40	48.26	56.00	58.40
50	60.96	68.70	71.10

RoHS Compliant

G			
F	16-JUN-16	TABLE	AK
E	19-FEB-14	SOLDERING	QL
D	03-MAR-10	DIMENTION	JP
C	15-OCT-09	C DIM.	JP
B	26-DEC-07	SOLDERING	CH
A	03-NOV-06	PDF	JP
REV	DATE	FILE	BY

PROJECTION:	
APPROVAL: GMo	

GENERAL TOLERANCE
.X = +/- 0.2
.XX = +/- 0.15
UNIT: MM
SCALE:
SHEET: 1/2
DRAW: PEARL

Telegram:09396994470

DESCRIPTION: BHD 2.54MM MALE ANGLED BOX HEADER HIGH TEMPERATURE	SIZE <b>A4</b>
WERI PART NO: 612 0xx 235 221	