

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS
 MATERIAL
 INSULATOR: PBT
 COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: GOLD
 QUALITY CLASS: 3 AS PER CECC 75 301-802
 PITCH: 2.00 MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 125°C
 FLAMMABILITY RATING: UL94-V0
 COMPLIANCE: LEAD FREE AND ROHS




ELECTRICAL
 CURRENT RATING: 2 A MAX
 WORKING VOLTAGE: 250 VAC
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/MN
 CONTACT RESISTANCE: 20 MOHM MAX

STANDARD
 CERTIFIED: E323964

SOLDERING
 JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING
 TRAY

DIMENSION
 A = 2.00 x (NB. PIN / 2 - 1)
 B = 2.00 x (NB. PIN / 2) + 7.2

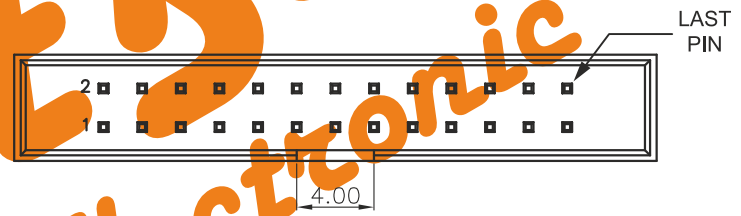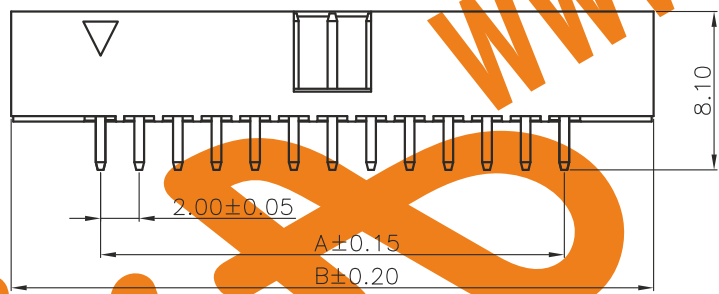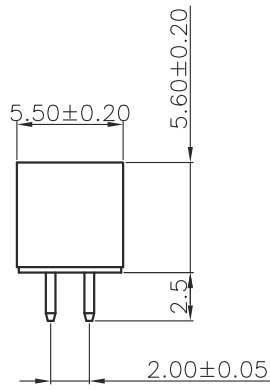

AsA Electronic
 WWW.AsA-Elec.com
AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.20 .XX = +/- 0.15	Telegram:09396994470
APPROVAL: ATo				UNIT: MM	DESCRIPTION: 2.00MM MALE BOX HEADER	
H	02-NOV-17	TPK	AK	SCALE:	SHEET: 1/3	SIZE A4
REV	DATE	FILE	BY	DRAW: PEARL	WERI PART NO: 625 0xx 216 21	