


1

2

3

4

5

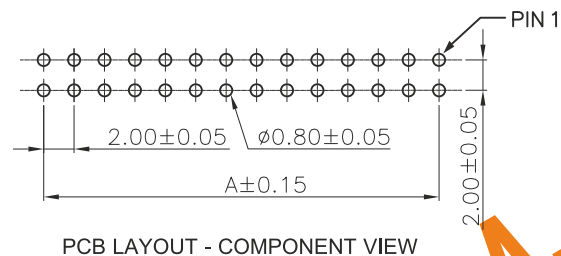

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PBT
 COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: GOLD
 QUALITY CLASS: 3 AS PER CECC 75 301-802
 PITCH: 2.00 MM




ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 125°C
 FLAMMABILITY RATING: UL94-V0
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 2 A MAX
 WORKING VOLTAGE: 250 VAC
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/MN
 CONTACT RESISTANCE: 20 MOHM MAX

SOLDERING
 JEDEC LEAD FREE SOLDERING WAVE PROCESS

PACKAGING
 TRAY

DIMENSION
 A = 2.00 x (NB. PIN / 2 - 1)
 B = 2.00 x (NB. PIN / 2) + 7.25
 C = 2.00 x (NB. PIN / 2) + 6.05

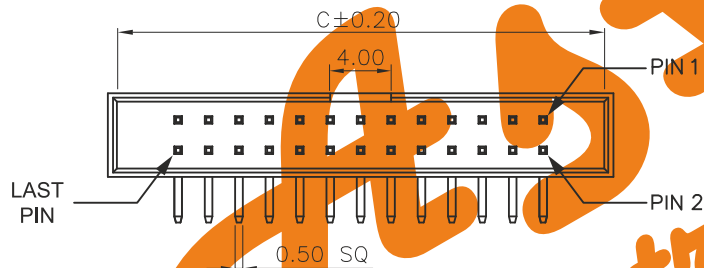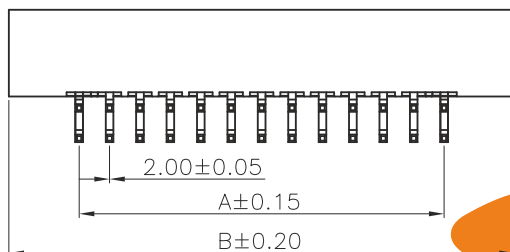

AsA WWW.AsA-Elec.com
Electronic

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = +/_ 0.20

.XX = +/_ 0.15

UNIT: MM

SCALE:

SHEET: 1/3

DRAW: **H.Z**

DESCRIPTION: 2.00 MM MALE ANGLED BOX HEADER

WERI PART NO: 625 0xx 217 21

SIZE

A4

Telegram:09396994470

H	31-OCT-18	PIN	AK
REV	DATE	FILE	BY