

**SPECIFICATION:**

Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ min  
 Contact Resistance: 20MΩ max  
 Withstand Voltage: 500V AC/DC  
 Operating Temperature: -40° C to +105° C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PA6T+30%GF UL 94V-0

**Ordering Code:**

BHAM08 - X - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts

06 08 10 14 16  
 20 24 26 30 32  
 34 40 44 50 60  
 64 80 100

③ Contact Plating:

G0:Gold flash S0:Selective  
 G1:3U" Gold S1:Selective 3u"  
 G2:5u" Gold S2:Selective 5u"  
 G3:10u" Gold S3:Selective 10u"  
 G4:15u" Gold S4:Selective 15u"  
 G5:30u" Gold S5:Selective 30u"  
 SN: Tin

④ Color Insulator






B:Black  
 U:Blue  
 W:White

⑤ Insulator Material

B:PA6T  
 C:LCP  
 E:PA9T

⑥ Packing

A:Tray  
 B:Bag  
 T:Tube  
 U:Tube+CAP  
 R:Tape&Reel  
 W:Tape&Reel+CAP

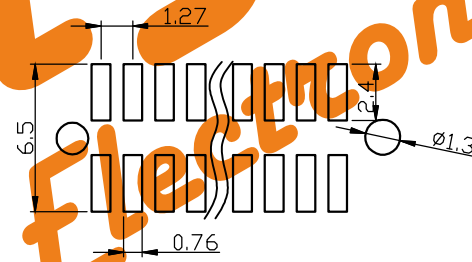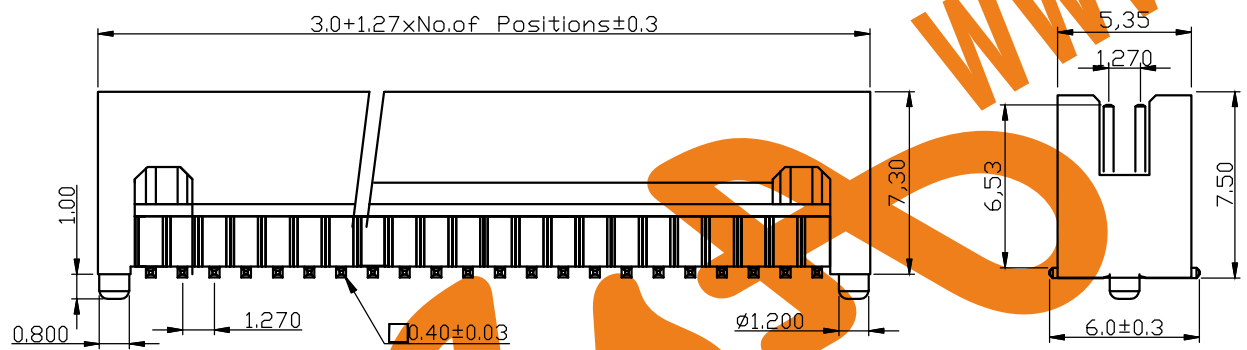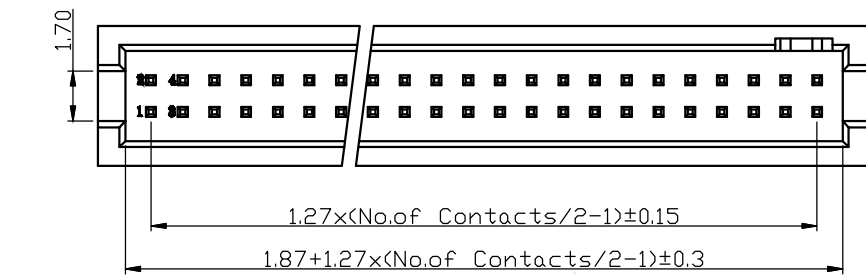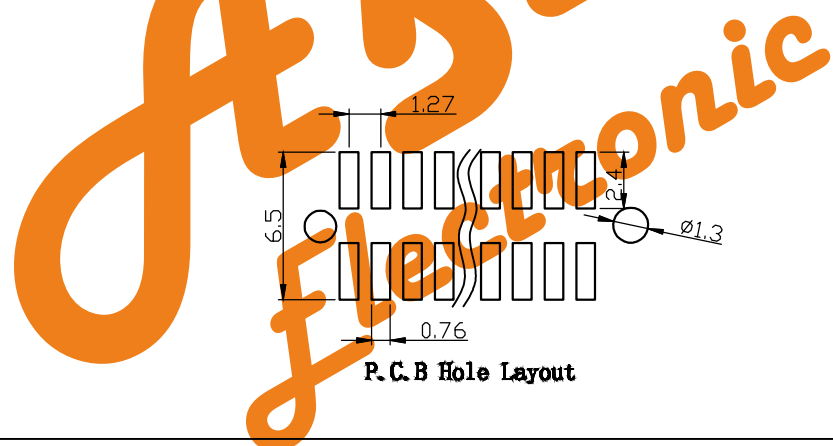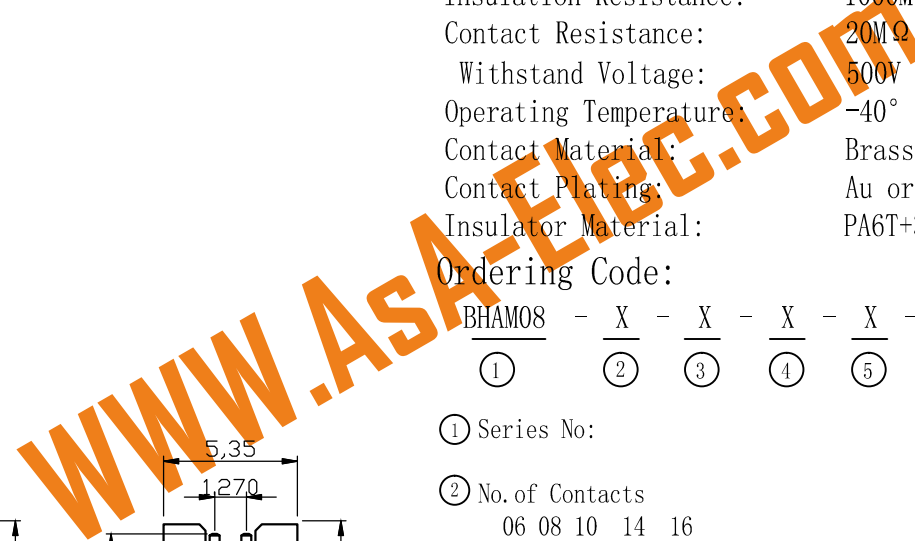

**P.C.B Hole Layout**

Unless Otherwise specified tolerance	
X. ±0.35	X.XX: ±0.20
X.X: ±0.25	X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Mo Guo Xuan	DATE 10/01/2019
CHECK H.Z	DATE 10/01/2019



**AsA Electronic Co.**

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

Telegram:09396994470

TITLE: 1.27mm Box Header SMT With post,High Profile

DRAWING NO: BHAM08-XXXXXXX

PRODUCT NO: BHAM08-XXXXXXX

REV	DESCRIPTION	DATE