
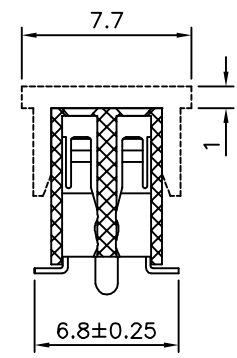
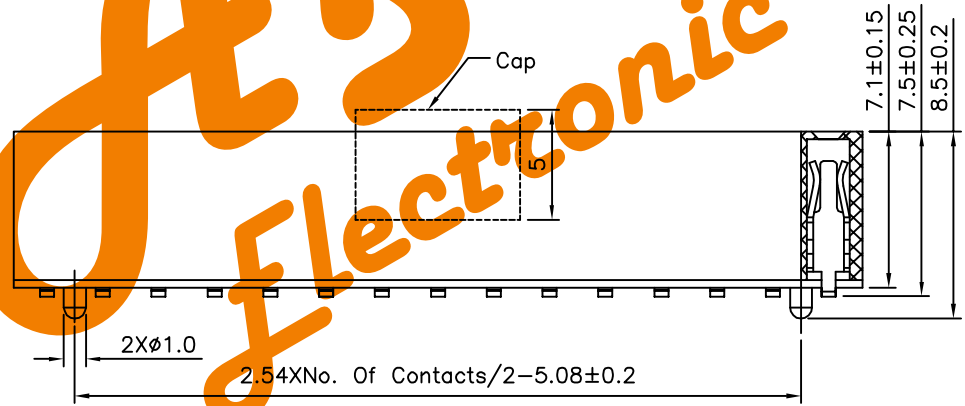


Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

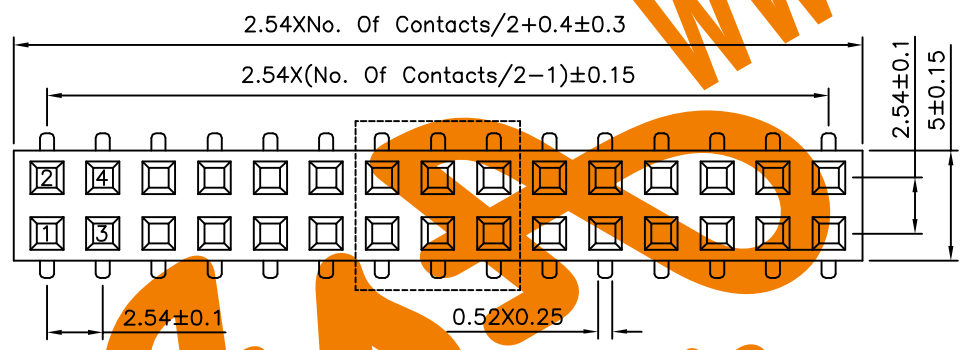

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Phosphor Bronze
Gold Flash On Contact Area,Tin
Plated On Solder Tails,Over Nickel
RoHS Compliant

AsA **Electronic**
WWW.AsA-Elec.com
AsA Electronic Co.
Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

| | | | | |
|-------------|------|-------|----|--|
| APPROVED BY | | EMILY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X: ±0.25 X: ±2" .X ±0.20 .X: ±1.5" .XX ±0.15 .XX: ±1" .XXX ±0.10 .XXX: ±0.5" |
| CHECKED BY | | HZF | | |
| DRAWING BY | | HAO | | |
| SCALE | NONE | REV. | A0 | UNIT mm |
| | | | | |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A0 | | NEW RELEASE | HZF | 07/05/2014 |