


△ SPECIFICATION
 Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:04~80 Contacts
 RoHS Compliant

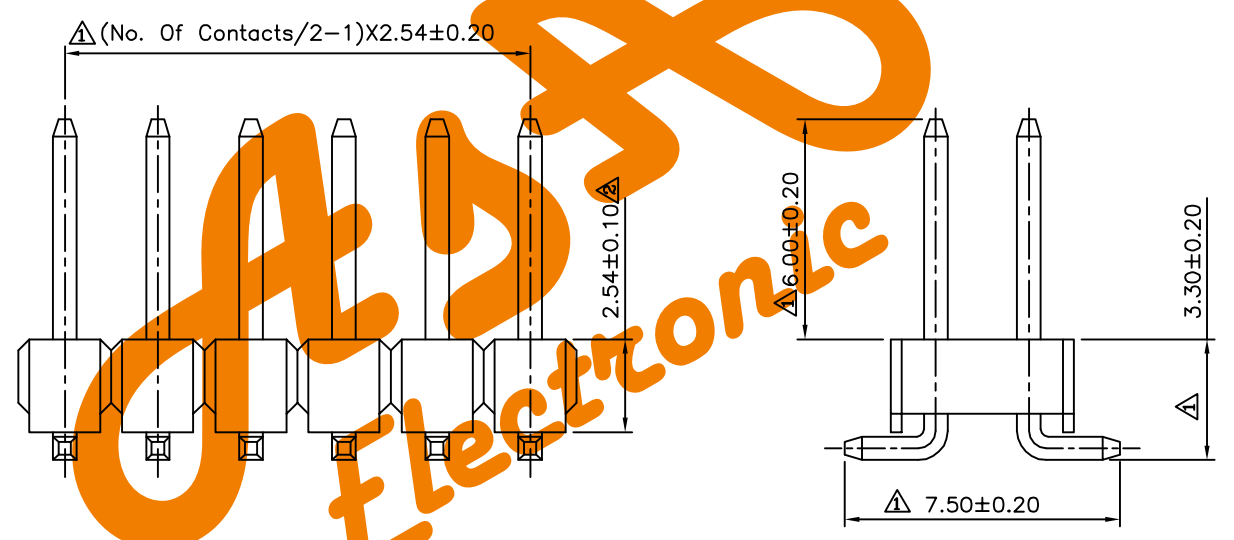

DRAWING No.		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG ±5°				
		CHECKED BY HZF			Δ A2	Modify Data	HZF	08/31/2011
		DRAWING BY WSS			Δ A1	Modify Data	HZF	11/25/2009
SCALE	NONE	REV.	A2	UNIT mm	Δ A0	NEW RELEASE	SHIN 03/13/2006	
					NO.REV.	REVISIONS	CHK DATE	