

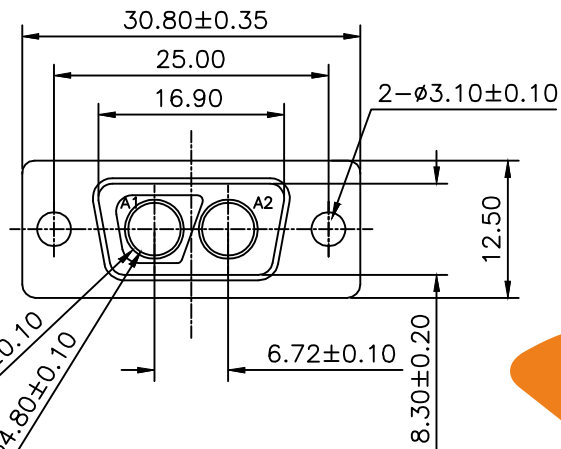


Coaxial D-SUB 2V2 MALE Solder Cup

ROHS COMPLIANT

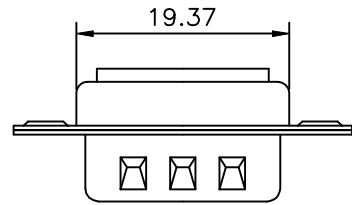

ELECTRICAL CHARACTERISTICS:

Dielectric withstanding Voltage: AC 1000V r.m.s.
Insulation Resistance: 500 Megohms Minimum at DC 500V
Contact Resistance: 25 Milliohms
Operating Temperature: -20°C~+85°C


MATERIALS:


Insulator: PBT, UL 94V-0 Rated
Shell: Cold Roller Steel

Ordering Code:

PDC2V2	-M	-G0	-B	-X	-00
①	②	③	④	⑤	⑥

- | | |
|-----------------------------|-------------------------------|
| ① Series | ⑤ Mounting Option: |
| ② Contact Type: | A: Through-hole |
| M: Male F: Female | B: 2.55" Threaded insert |
| ③ Contact NO.: | C: 6.80" Threaded rear spacer |
| G0: Gold flash G1: 3u" Gold | D: 10.3" Threaded rear spacer |
| G2: 5u" Gold G3: 10u" Gold | PCB clip |
| G4: 15u" Gold G5: 30u" Gold | E: 11.0" Threaded rear spacer |
| ④ Insulation Color Code: | PCB clip |
| B: Black L: Blue | F: 11.9" Threaded rear spacer |
| W: White | PCB clip |
| | ⑥ Series |

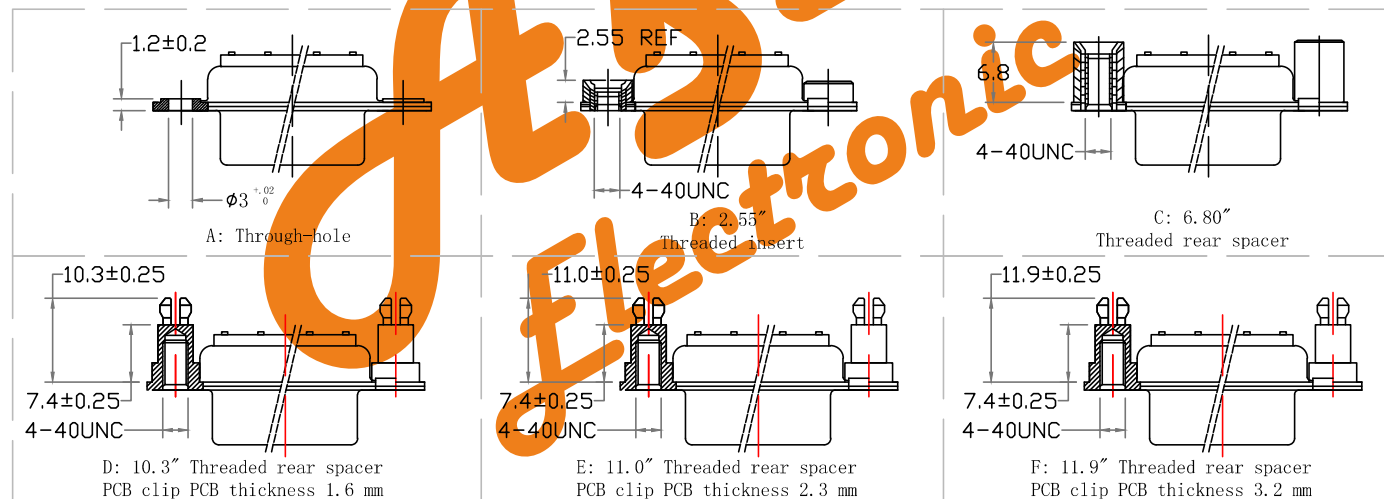

Unless Otherwise specified tolerance		 WWW.ASA-Elec.com AsA Electronic Co. Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02	
X.±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15	SCALE: 1:1	UNIT: mm	TITLE:
DRAWN: junfon H	DRAWING NO:		
CHECKED: YANG	PRODUCT NO:		
 3rd ANGLE PROJECTION			

REV		DESCRIPTION		DATE	
1	2	3	4	5	6