

Coaxial D-SUB 3V3 MALE Solder Cup

ROHS COMPLIANT

ELECTRICAL CHARACTERISTICS:

Dielectric withstanding Voltage: AC 1000V r.m.s.
Insulation Resistance: 500 Megohms Minimum at DC 500V
Contact Resistance: 25 Milliohms
Operating Temperature: -20°C~+85°C




MATERIALS:


Insulator: PBT, UL 94V-0 Rated
Shell: Cold Roller Steel

Ordering Code:

PDC3V3 - M - G0 - B - X - 00
① ② ③ ④ ⑤ ⑥

- ① Series
② Contact Type:
M: Male F: Female
③ Contact NO.:
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold
④ Insulation Color Code:
B: Black L: Blue
W: White
⑤ Mounting Option:
A: Through-hole
B: 2.55" Threaded insert
C: 6.80" Threaded rear spacer
D: 10.3" Threaded rear spacer
PCB clip
E: 11.0" Threaded rear spacer
PCB clip
F: 11.9" Threaded rear spacer
PCB clip
⑥ Series

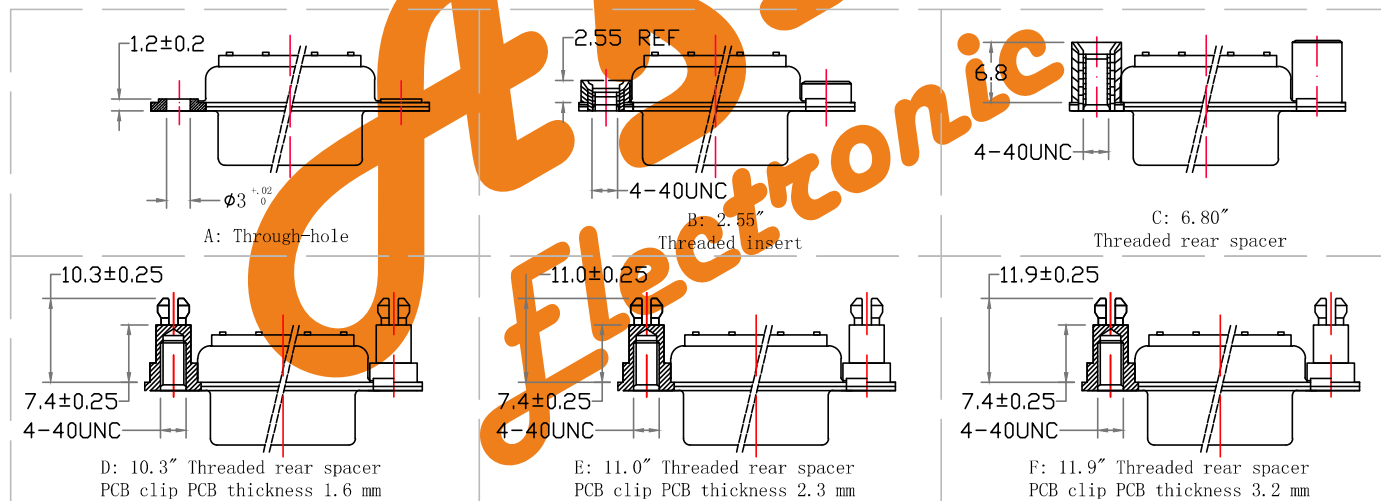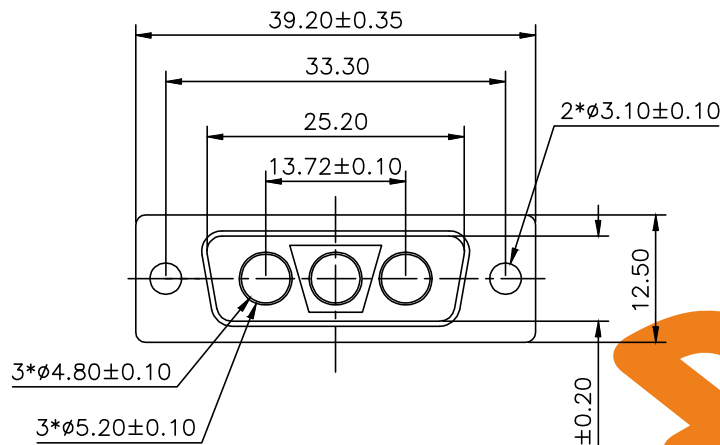

Unless Otherwise specified tolerance		 WWW.AsA-Elec.com AsA Electronic Co. Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
X.±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15		
SCALE: 1:1	UNIT: mm	TITLE: Coaxial D-SUB 3V3 MALE Solder Cup
DRAWN: junfon H		
CHECKED: YANG		
 3rd ANGLE PROJECTION		DRAWING NO: PDC3V3-MXXXXX00
		PRODUCT NO: PDC3V3-MXXXXX00

Add option of plating		10/5/19	
REV	DESCRIPTION	DATE	
1	2	3	4