


# D-SUB Male Dual Row IDC Exterior Button Type(stamped Pin)

**ROHS COMPLIANT**

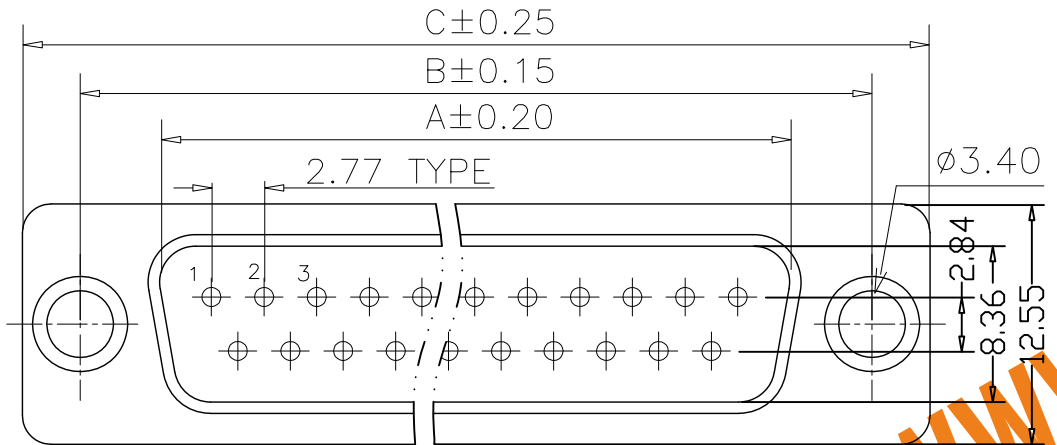

	09pin	15pin	25pin	37pin
A	16.92	25.25	38.96	55.96
B	24.99	33.32	47.04	68.50
C	30.80	39.10	53.00	69.30
D	11.86	19.50	32.15	48.76


**Material (材料):**

Housing(塑胶): Temperature Thermoplastics, PBT+G.F UL 94V-0  
 Contact(端子): Brass or Bronze  
 Shell(壳): 0.35T Steel Nickel Plating All Area




**Electical Characteristics(电气性能):**

Current Rating(额定电流): 5A  
 Contact Resistance(接触阻抗): 20 milliohms Max  
 Withstanding Voltage(耐电压): 500V AC For 1 Minute  
 Insulation Resistance(绝缘阻抗): 1000 Megohms Min  
 Operating Temperature:(温度范围): -55° C to +105° C

**Ordering Code:**



- ① Dual Row IDC Type
- ② Contact Type:  
M:Male
- ③ Contact NO. :  
09=09pin  
15=15pin  
25=25pin  
37=37pin
- ④ Contact Plating  
S: Selective Gold  
G0: Gold flash  
G1: 3u" Gold  
G2: 5u" Gold  
G3: 10u" Gold  
G4: 15u" Gold  
G5: 30u" Gold
- ⑤ Color Code:  
L:Blue  
B:Black
- ⑥ Other Option:  
A: With S/R(Standard)  
B: Without S/R

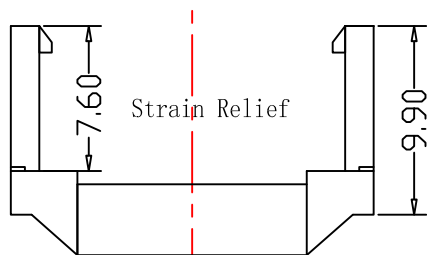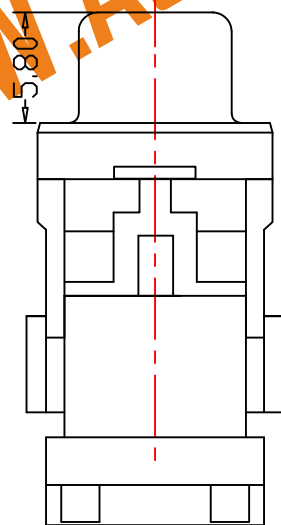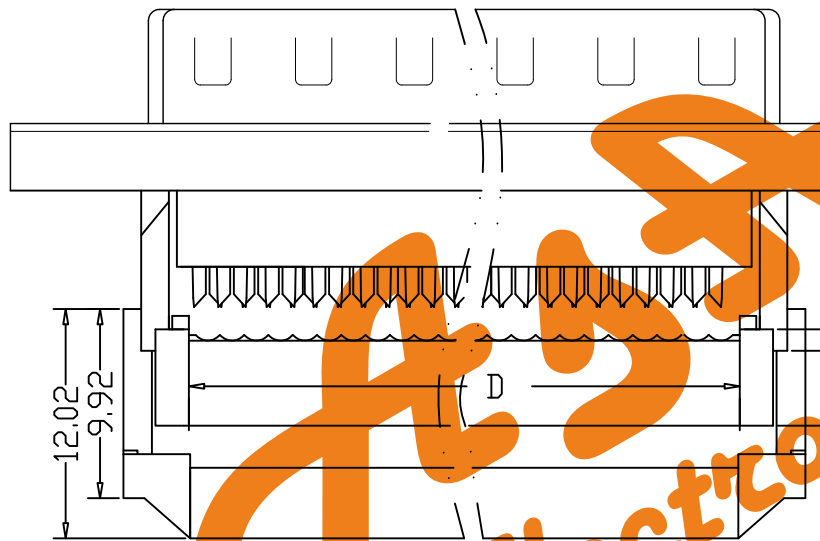

Unless Otherwise specified tolerance  
 X: ±0.35  
 X.X: ±0.25  
 X.XX: ±0.10  
 X.XXX: ±0.05

SCALE: 1:1      UNIT: mm

DRAWN: junfon H  
 CHECKED: YANG

DATE: 11/3/1

**3rd ANGLE PROJECTION**

**AsA Electronic Co.**  
 WWW.AsA-Elec.com  
 Tel: (+98) 21 66 73 56 82 Mob: (+98) 912 03 161 02

TITLE: D-SUB Male Dual Row IDC Exterior Button Type(stamped Pin)

DRAWING NO: DIDC02-MXXXX  
 PRODUCT NO: DIDC02-MXXXX