

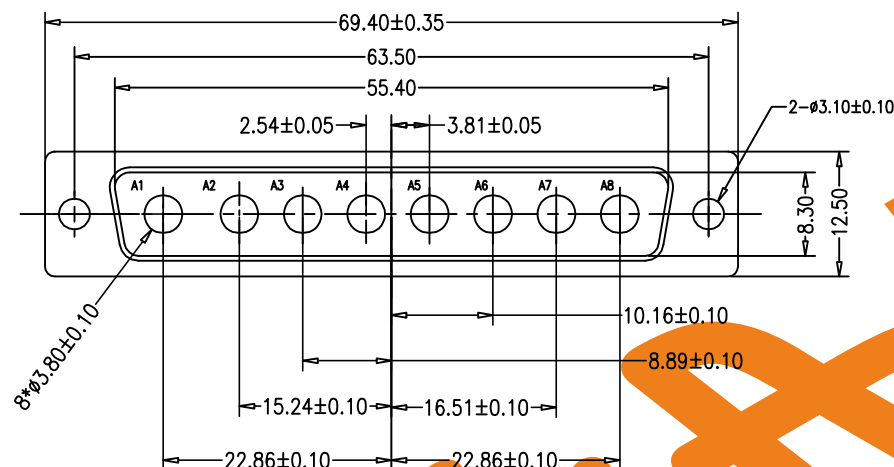


# Coaxial D-SUB 8W8 MALE Solder Cup

ROHS COMPLIANT

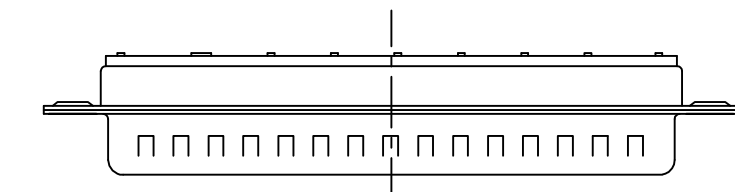

## ELECTRICAL CHARACTERISTICS:

Dielectric withstanding Voltage: AC 1000V r.m.s.  
Insulation Resistance: 500 Megohms Minimum at DC 500V  
Contact Resistance: 25 Milliohms  
Operating Temperature:  $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$

## MATERIALS:

Insulator: PBT, UL 94V-0 Rated  
Shell: Cold Roller Steel

## Ordering Code:

|        |    |     |    |    |     |
|--------|----|-----|----|----|-----|
| PDC8W8 | -M | -G0 | -B | -X | -00 |
| ①      | ②  | ③   | ④  | ⑤  | ⑥   |

① Series

② Contact Type:  
M: Male F: Female


③ Contact NO.:  
G0: Gold flash G1: 3u" Gold  
G2: 5u" Gold G3: 10u" Gold  
G4: 15u" Gold G5: 30u" Gold

④ Insulation Color Code:  
B: Black L: Blue  
W: White

⑤ Mounting Option:

A: Through-hole  
B: 2.55" Threaded insert  
C: 6.80" Threaded rear spacer  
D: 10.3" Threaded rear spacer  
E: 11.0" Threaded rear spacer  
F: 11.9" Threaded rear spacer  
PCB clip

⑥ Series

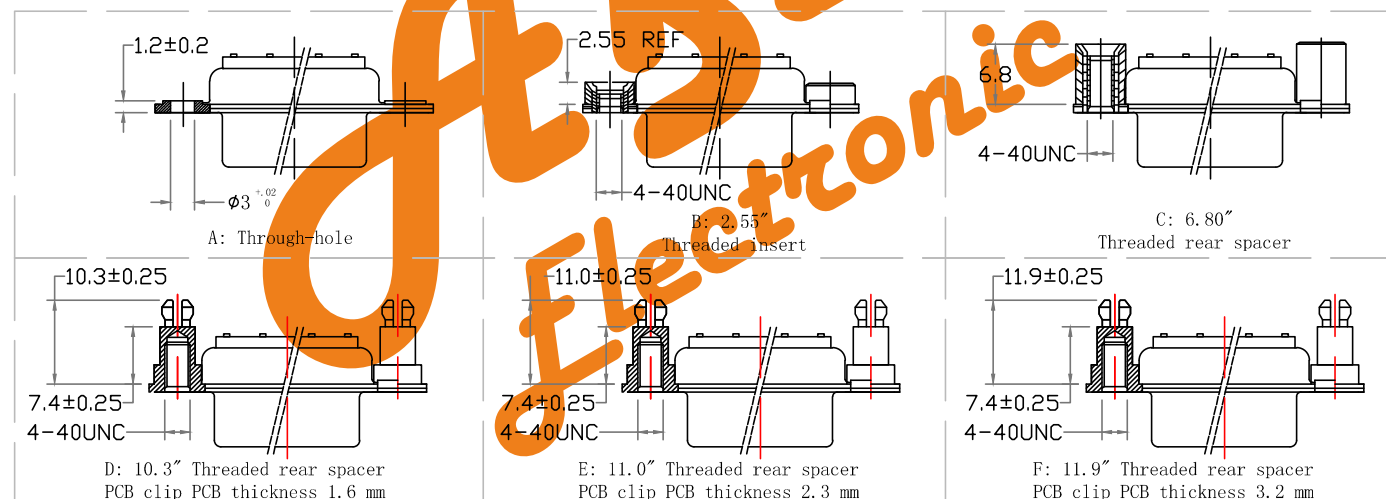

Unless Otherwise specified tolerance

X.±0.35  
X.X:±0.25  
X.XX:±0.20  
X.XXX:±0.15

SCALE: 1:1

UNIT:  
mm

DRAWN: junfon H

CHECKED: YANG



**AsA** **Electronic** **Co.**  
WWW.AsA-Elec.com  
Tel: (+98) 21 66 73 56 82 Mob: (+98) 912 03 161 02

TITLE:  
Coaxial D-SUB 8W8 MALE Solder Cup

DRAWING NO: PDC8W8-MXXXX00

PRODUCT NO: PDC8W8-MXXXX00

Add option of plating

12/7/17

REV

DESCRIPTION

DATE