


Coaxial D-SUB 24W7 FEMALE Solder Cup

ROHS COMPLIANT

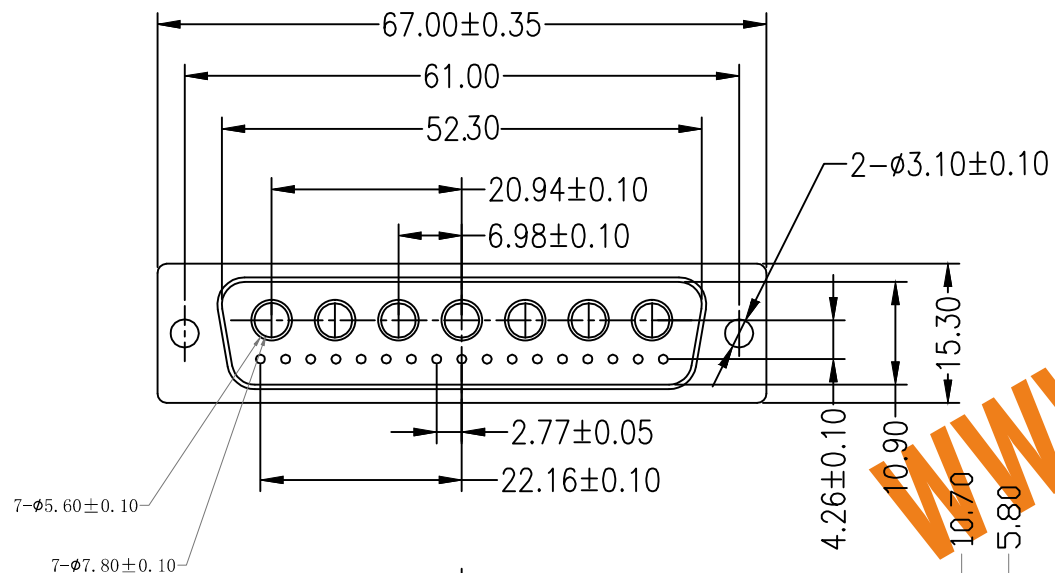

ELECTRICAL CHARACTERISTICS:

Dielectric withstanding Voltage: AC 1000V r.m.s.
Insulation Resistance: 500 Megohms Minimum at DC 500V
Contact Resistance: 25 Milliohms
Operating Temperature: -20°C~+85°C

MATERIALS:

Insulator: PBT, UL 94V-0 Rated
Shell: Cold Roller Steel

Ordering Code:

PDC24W7 -F -G0 -B -X -00
① ② ③ ④ ⑤ ⑥

① Series

② Contact Type:
M: Male F: Female

③ Contact NO.:
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold

④ Insulation Color Code:
B: Black L: Blue
W: White

⑤ Mounting Option:

A: Through-hole
B: 2.55" Threaded insert
C: 6.80" Threaded rear spacer
D: 10.3" Threaded rear spacer
E: 11.0" Threaded rear spacer
F: 11.9" Threaded rear spacer
PCB clip

⑥ Series

Unless Otherwise specified tolerance

X.±0.35
X.X:±0.25
X.XX:±0.20
X.XXX:±0.15

SCALE: 1:1

UNIT:
mm

DRAWN: junfon H

CHECKED: YANG



WWW.ASA-Elec.com
ASA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

TITLE:

Coaxial D-SUB 24W7 FEMALE Solder Cup

DRAWING NO: PDC24W7-FXXXX00

PRODUCT NO: PDC24W7-FXXXX00

Add option of plating

12/7/17

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8