


Coaxial D-SUB 25W3 FEMALE Solder Cup

ROHS COMPLIANT

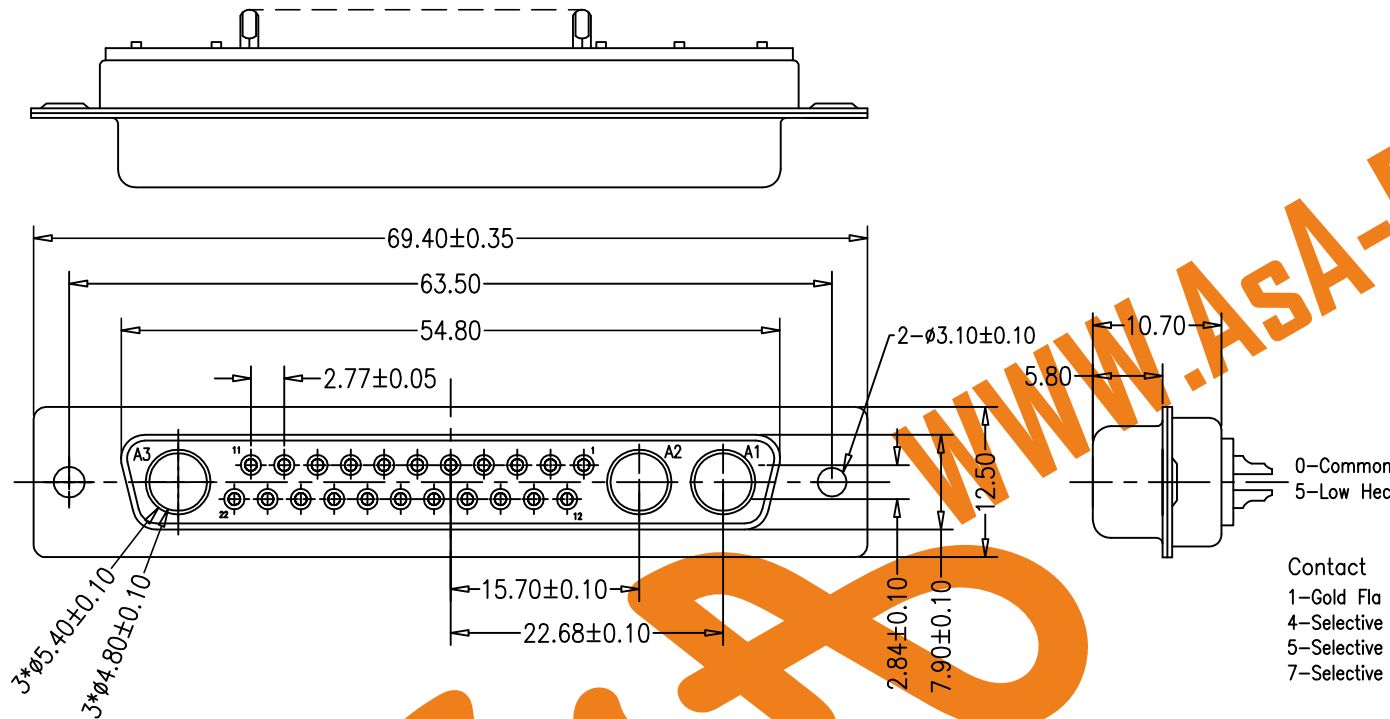

ELECTRICAL CHARACTERISTICS:

Dielectric withstanding Voltage: AC 1000V r.m.s.
Insulation Resistance: 500 Megohms Minimum at DC 500V
Contact Resistance: 25 Milliohms
Operating Temperature: -20°C~+85°C


MATERIALS:

Insulator: PBT, UL 94V-0 Rated
Shell: Cold Roller Steel

Ordering Code:

PDC25W3	-F	-G0	-B	-X	-00
①	②	③	④	⑤	⑥

- ① Series
- ② Contact Type:
M:Male F:Female
- ③ Contact NO.:
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold
- ④ Insulation Color Code:
B:Black L:Blue
W:White
- ⑤ Mounting Option:
A: Through-hole
B: 2.55" Threaded insert
C: 6.80" Threaded rear spacer
D: 10.3" Threaded rear spacer
E: 11.0" Threaded rear spacer
F: 11.9" Threaded rear spacer
PCB clip
- ⑥ Series

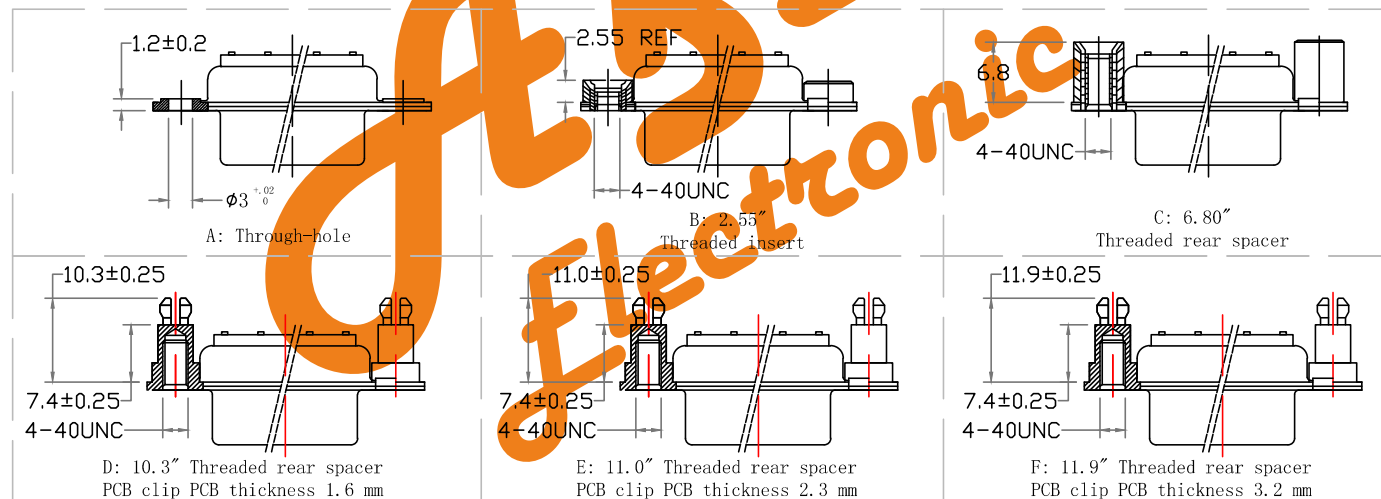

Unless Otherwise specified tolerance		 WWW.ASA-Elec.com ASA Electronic Co. Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02	
X.±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15	SCALE: 1:1	UNIT: mm	TITLE: Coaxial D-SUB 25W3 FEMALE Solder Cup
DRAWN: junfon H	DRAWING NO: PDC25W3-FXXXX00		
CHECKED: YANG	PRODUCT NO: PDC25W3-FXXXX00		

Add option of plating		12/7/17	
REV	DESCRIPTION	DATE	
1	2	3	4