


Coaxial D-SUB 43W2 FEMALE Solder Cup

ROHS COMPLIANT

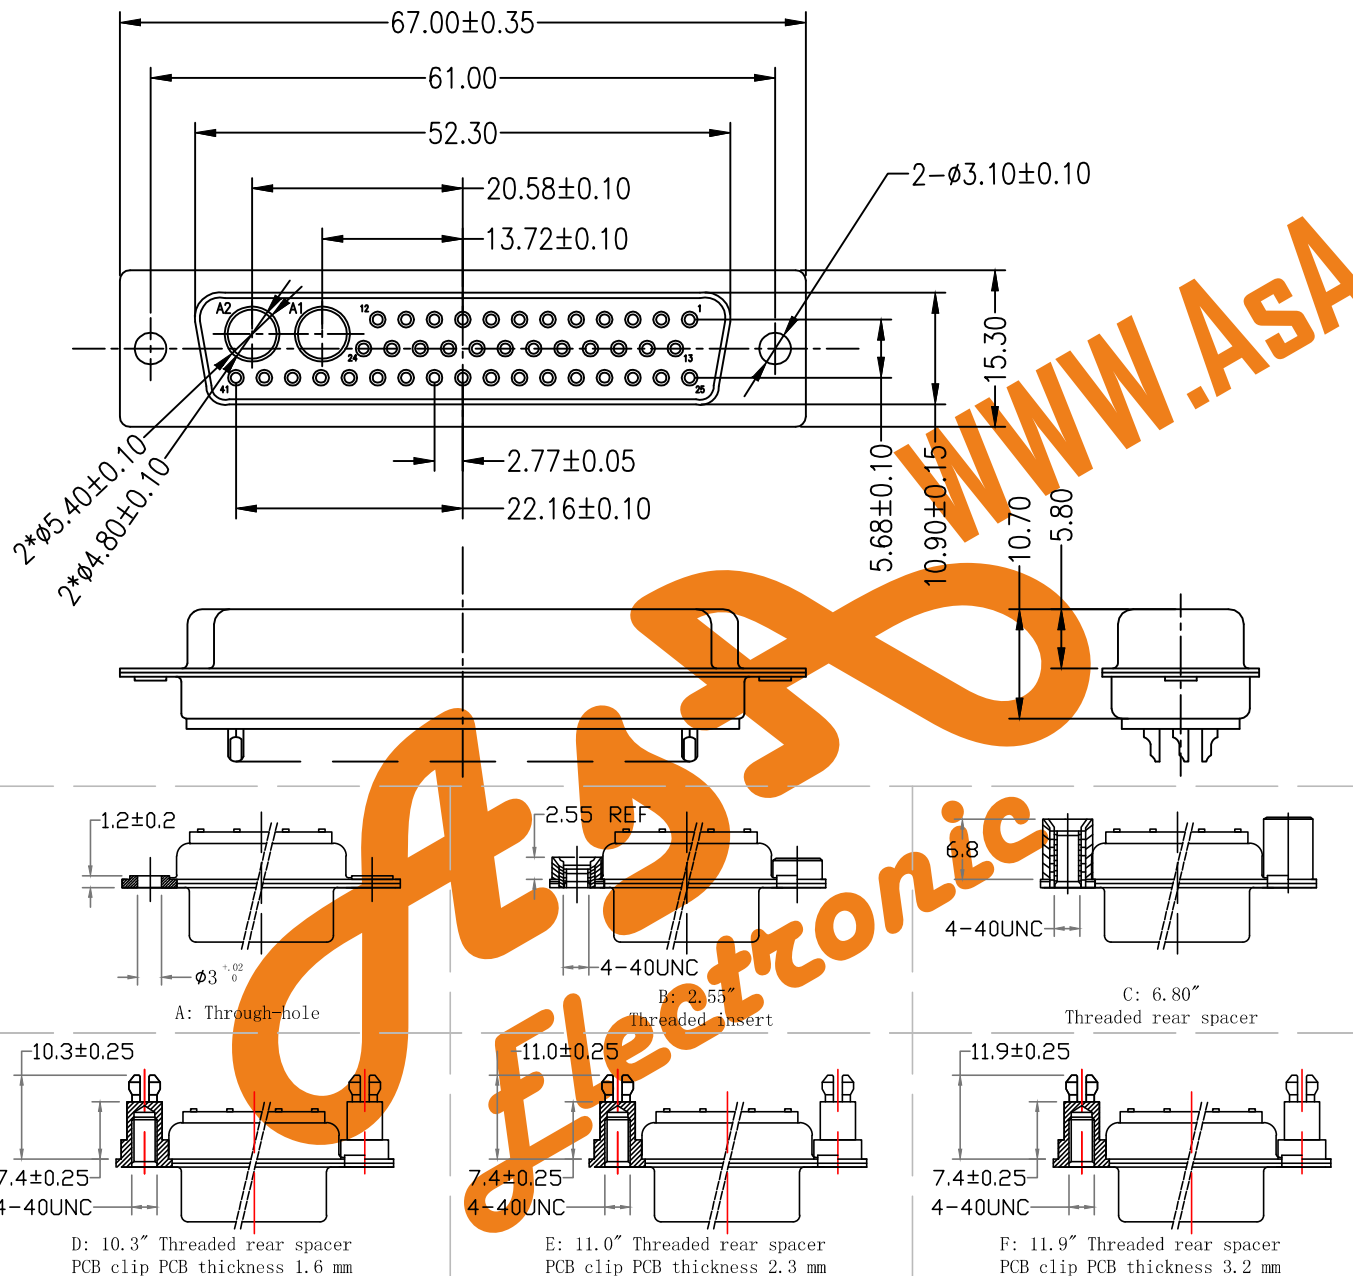

ELECTRICAL CHARACTERISTICS:

Dielectric withstanding Voltage: AC 1000V r.m.s.
Insulation Resistance: 500 Megohms Minimum at DC 500V
Contact Resistance: 25 Milliohms
Operating Temperature: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$

MATERIALS:

Insulator: PBT, UL 94V-0 Rated
Shell: Cold Roller Steel

Ordering Code:

PDC43W2 -F -G0 -B -X -00
① ② ③ ④ ⑤ ⑥

- ① Series
② Contact Type:
M: Male F: Female
③ Contact NO.:
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold
④ Insulation Color Code:
B: Black L: Blue
W: White
⑤ Mounting Option:
A: Through-hole
B: 2.55" Threaded insert
C: 6.80" Threaded rear spacer
D: 10.3" Threaded rear spacer
E: 11.0" Threaded rear spacer
F: 11.9" Threaded rear spacer
⑥ Series

Unless Otherwise specified tolerance		AsA Electronic Co. WWW.AsA-Elec.com Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02	
X.±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15			
SCALE: 1:1	UNIT: mm	TITLE: Coaxial D-SUB 43W2 FEMALE Solder Cup	
DRAWN: junfon H		DRAWING NO: PDC43W2-FXXXX00	
CHECKED: YANG		PRODUCT NO: PDC43W2-FXXXX00	
3rd ANGLE PROJECTION			