
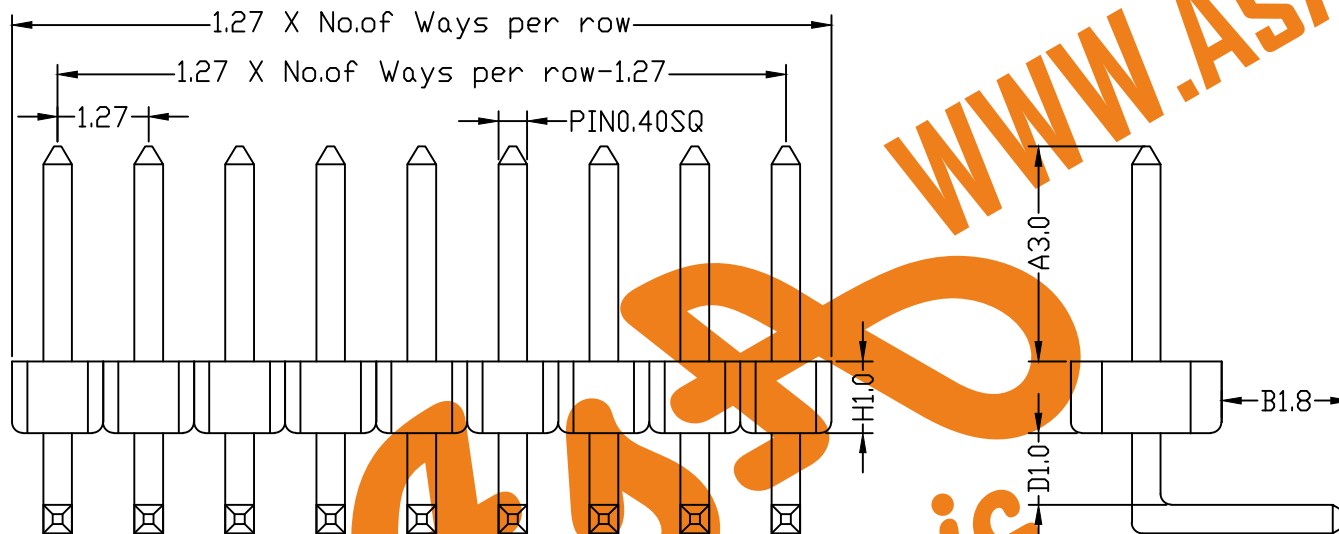


ROHS COMPLIANT

1.27mm Pin Header Single Row Angle Type(W=2.1, H=1.0)

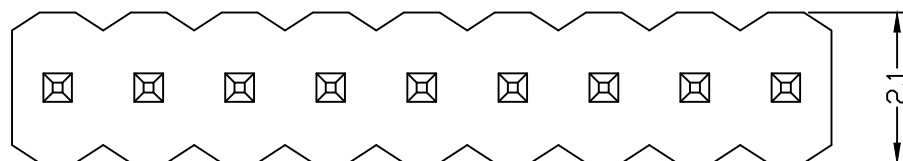

PCB LAYOUT

SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHCR01 - $\frac{X}{2}$ - $\frac{X}{3}$ - $\frac{S}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$

① Series No:

② No. of Contacts
01 To 50

③ Contact Plating
 G0: Gold flash
 G1 :3u" Gold
 G2 :5u" Gold
 G3 :10u" Gold
 G4 :15u" Gold
 G5 :30u" Gold
 SN: Tin

④ Connector Type
S:Single Row

⑤ Pin Length:

A+B+D+1.05+H1/H2/H3
Please mark the desired length in the A/B

⑥ Insulator Material
 B:PA6T
 C:LCP
 D:PA46

⑦ Packing
 A:Tray
 B:Bag
 T:Tube

Unless Otherwise specified tolerance


A	B	D	H
3.00	1.80	1.00	1.00
Optional		Optional	

SCALE:
As Shown

UNIT:
mm

DRAWN: junfon H

CHECKED: YANG



AsA **Electronic** **Co.**
 WWW.AsA-Elec.com
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

TITLE:
1.27mm Pin Header Single Row Angle Type
 DRAWING NO: PHCR01-XXSXXX
 PRODUCT NO: PHCR01-XXSXXX

REV	DESCRIPTION	DATE
	Add option of plating	10/8/1