



ROHS COMPLIANT


1.27mm Pin Header Single Row SMT Type H1.0

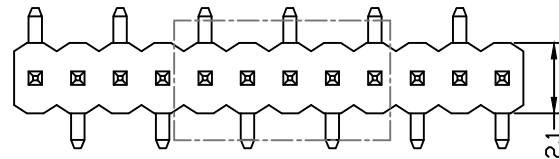



TYPE A

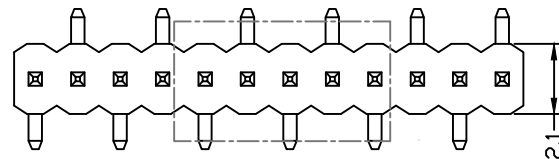

TYPE B

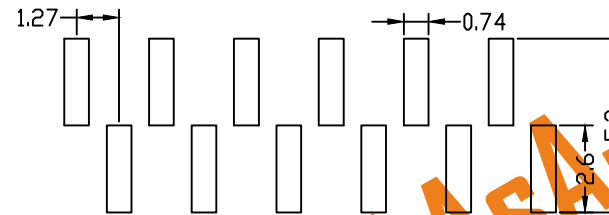

TYPE A
PCB LAYOUT

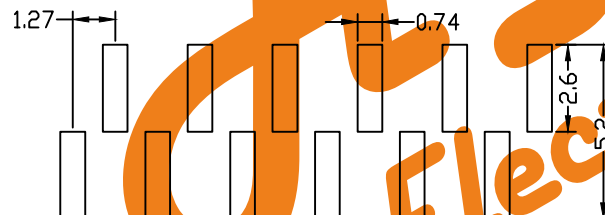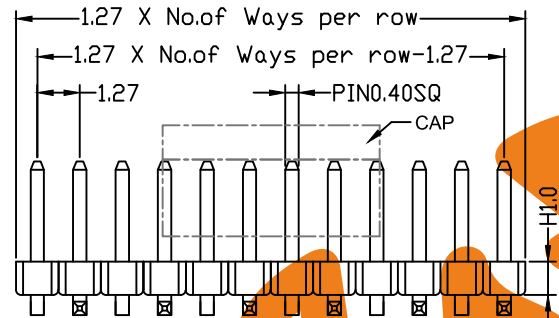

TYPE B

SPECIFICATION

Current Rating: 1Amp
Insulation Resistance: 5000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PA6T, UL 94V-0 Black

Ordering Code:

PHCM03 - X - X - S - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No
② No. of Contacts 01 To 50
③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
④ Connector Type
S: Single
⑤ Pin Length:
A+W/2+D+H
Please mark the desired length in the A/B
⑥ Insulator Material
B: PA6T
C: LCP
D: PA46
⑦ Packing
A: Tray B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑧ Special Function
A: Type A
B: Type B

Unless Otherwise specified tolerance

X: ±0.35
X.X: ±0.25
X.XX: ±0.20
X.XXX: ±0.15

SCALE:
As Shown
UNIT:
mm

AsA Electronic Co.
WWW.AsA-Elec.com
Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02


A	W	D	H
3.0	4.2	0.2	1.0
Optional		Optional	

DRAWN: junfon H

CHECKED: YANG

TITLE:
1.27mm Pin Header Single Row SMT Type

DRAWING NO: PHCM03-XXSXXXXX
PRODUCT NO: PHCM03-XXSXXXXX



Add option of plating

10/8/1

DESCRIPTION

DATE

REV