

ROHS COMPLIANT

2.00mm Pin Header DualRow Straight Type

SPECIFICATION

Current Rating: 1.5 Amp
Insulation Resistance: 5000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHDS04 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{D}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$ - $\frac{X}{8}$

① Series No:

② No. of Contacts
02 To 80③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin④ Connector Type
D: Dual⑤ Pin Length:
A+B+H

Please mark the desired length in the A/B/H

⑥ Insulator Material

A: PBT
B: PA6T
C: LCP
D: PA46⑦ Packing
A: Tray
B: Bag
T: Tube⑧ Plastic High
H1: 1.5mm
H2: 2.0mm


Unless Otherwise specified tolerance

X: ± 0.35
X.X: ± 0.25
X.XX: ± 0.20
X.XXX: ± 0.15

SCALE:
As ShownUNIT:
mm

DRAWN: junfon H

CHECKED: YANG



3rd ANGLE PROJECTION



WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

TITLE:




2.00mm Pin Header Dual Row Straight Type

DRAWING NO:

PHDS04-XXDXXXX

PRODUCT NO:

PHDS04-XXDXXXX

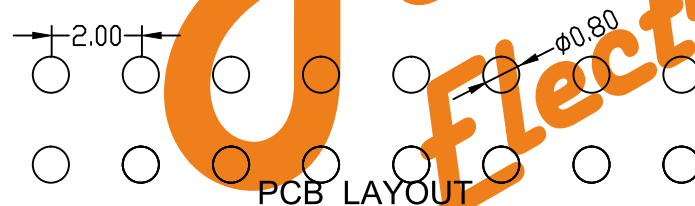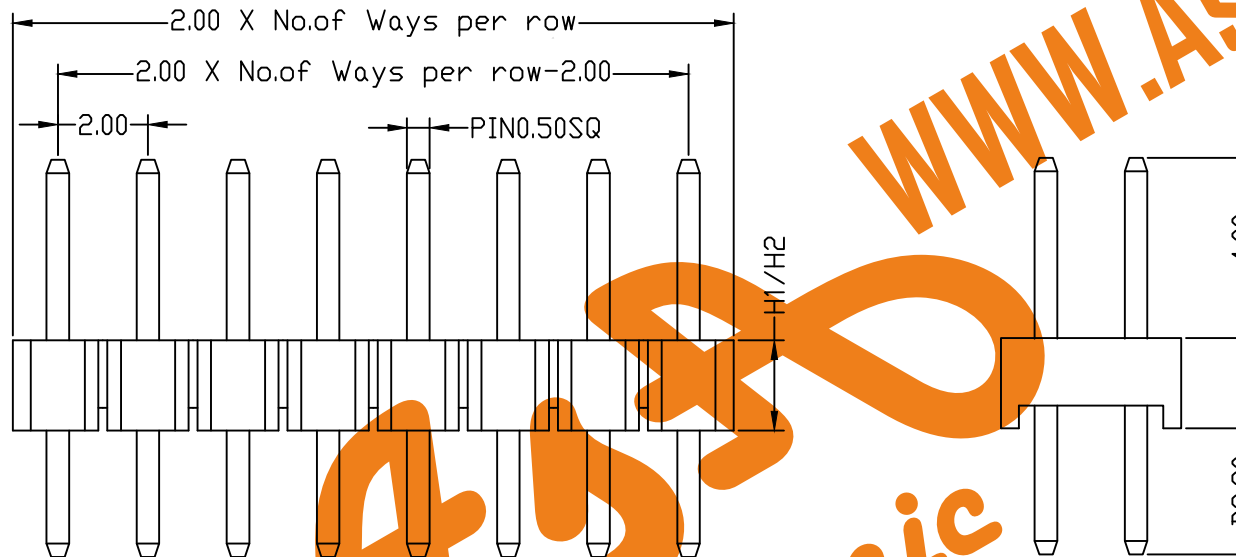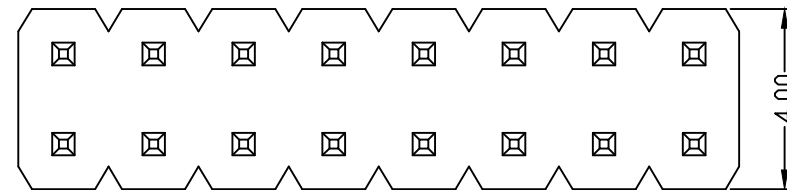

PCB LAYOUT

1	2	3	4	5	6	7	8
REV	DESCRIPTION			DATE			
	Add option of plating			10/8/1			