

ROHS COMPLIANT

2.00mm Pin Header Dual Row Angle Type

SPECIFICATION

Current Rating: 1.5 Amp
Insulation Resistance: 5000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65
Contact Material: Brass
Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHDR04 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{D}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$ - $\frac{X}{8}$

① Series No:

② No. of Contacts
02 To 80

③ Contact Plating
G0: Gold flash
G1 :3u" Gold
G2 :5u" Gold
G3 :10u" Gold
G4 :15u" Gold
G5 :30u" Gold
SN: Tin

④ Connector Type
D: Dual

⑤ Pin Length:
A+B+D+C+1.00




Please mark the desired length in the A/B/D

⑥ Insulator Material

A: PBT
B: PA6T
C: LCP
D: PA46

⑦ Packing
A: Tray
B: Bag
T: Tube

⑧ Plastic High
H1: 1.5mm
H2: 2.0mm

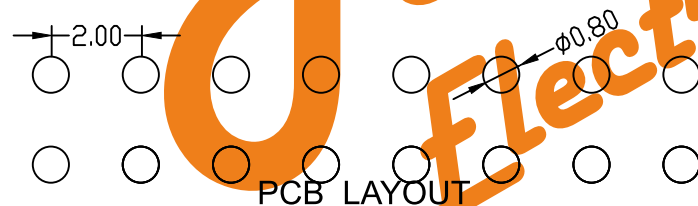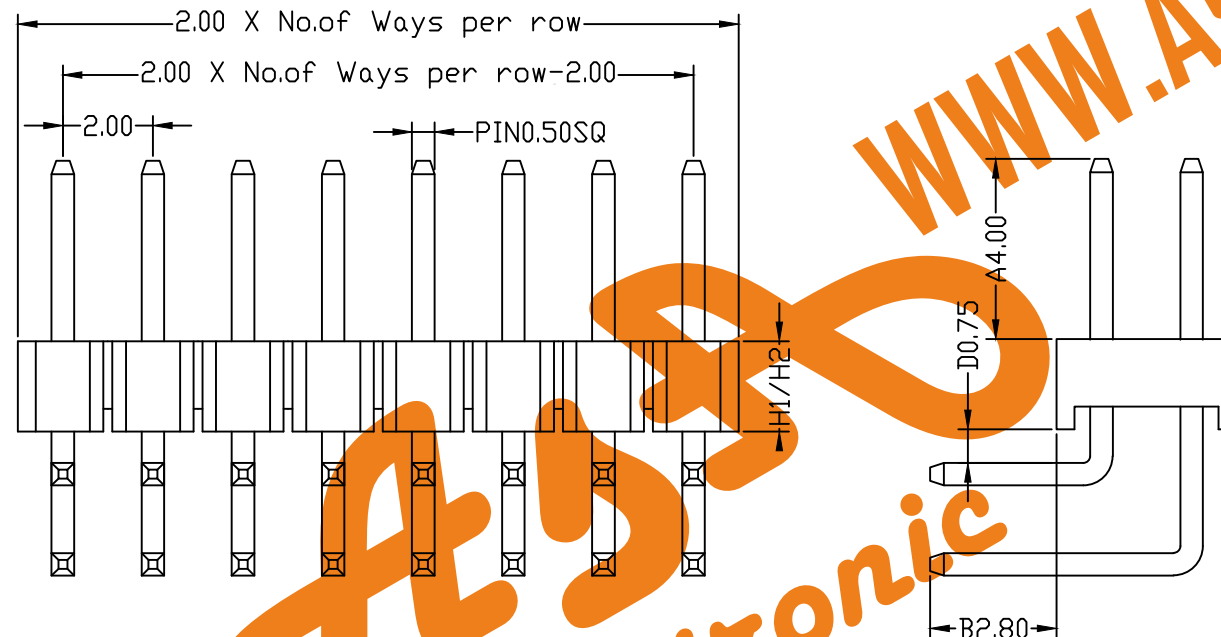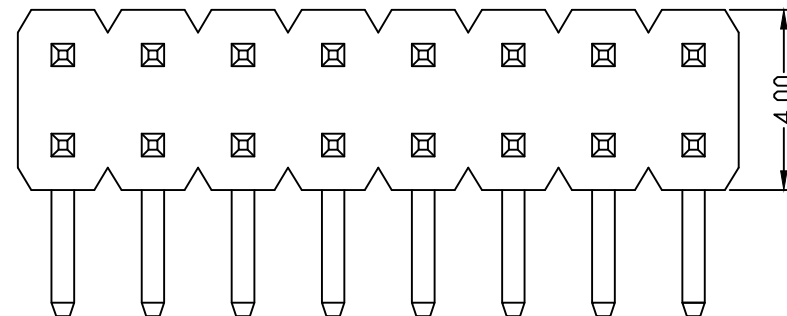

PCB LAYOUT

A	B	D
4.0	2.8	0.75

Optional

Unless Otherwise specified tolerance

SCALE:
As Shown

UNIT:
mm

DRAWN: junFon H

CHECKED: YANG



3rd ANGLE PROJECTION



WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

TITLE:

2.00mm Pin Header Dual Row Angle Type

DRAWING NO: PHDR04-XXDXXXX

PRODUCT NO: PHDR04-XXDXXXX

Add option of plating

10/8/1

DESCRIPTION

DATE

REV