
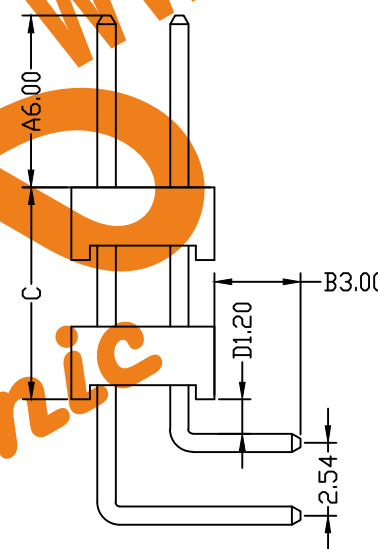
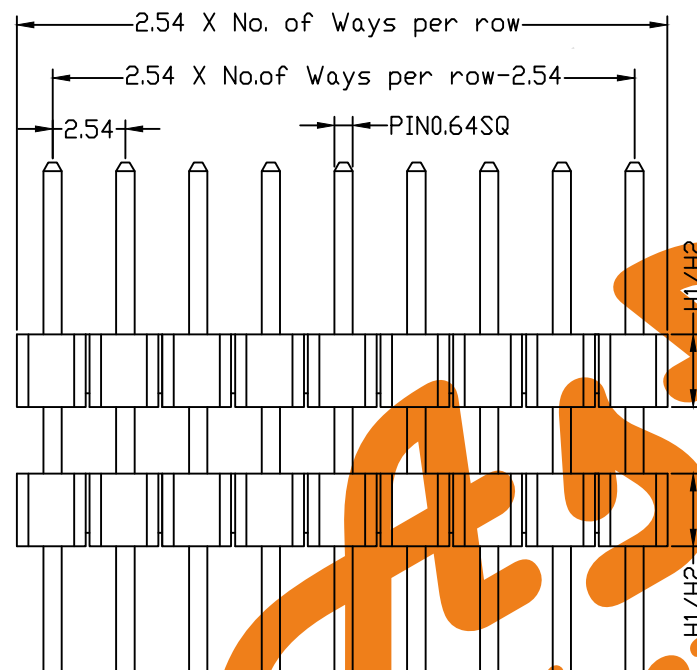
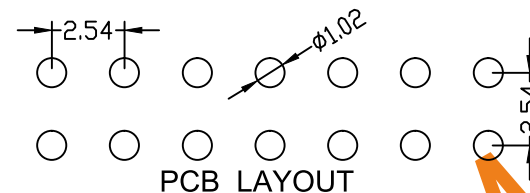


ROHS COMPLIANT

2.54mm Pin Header Dual RowDouble Plastic Angle Type

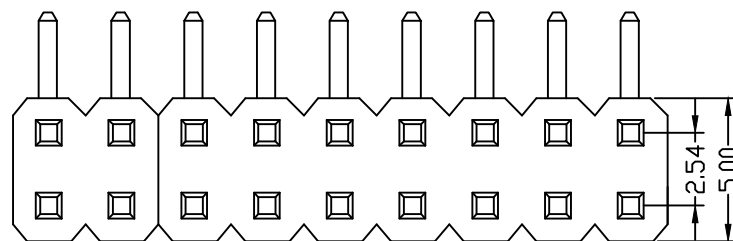

SPECIFICATION

Current Rating: 3 Amp
Insulation Resistance: 5000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHER07 - X - X - D - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No. of Contacts
02 To 80

③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin

④ Connector Type
D: Dual

⑤ Pin Length:
A+B+D+C+1.27

Please mark the desired length in the A/B/D

⑥ Insulator Material

A: PBT
B: PA6T
C: LCP
D: PA46
⑦ Packing
A: Tray
B: Bag
T: Tube

⑧ Plastic High
H1: 2.00mm
H2: 2.54mm

Unless Otherwise specified tolerance


X: ±0.35
X.X: ±0.25
X.XX: ±0.20
X.XXX: ±0.15

SCALE:
As Shown

UNIT:
mm

DRAWN: junfon H

CHECKED: YANG



WWW.ASA-Elec.com
ASA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

TITLE:
2.54mm Pin Header DualRow Double Plastic Angle Type

DRAWING NO: PHER07-XXDXXXX

PRODUCT NO: PHER07-XXDXXXX

Add option of plating

10/8/1

DESCRIPTION

DATE

REV