
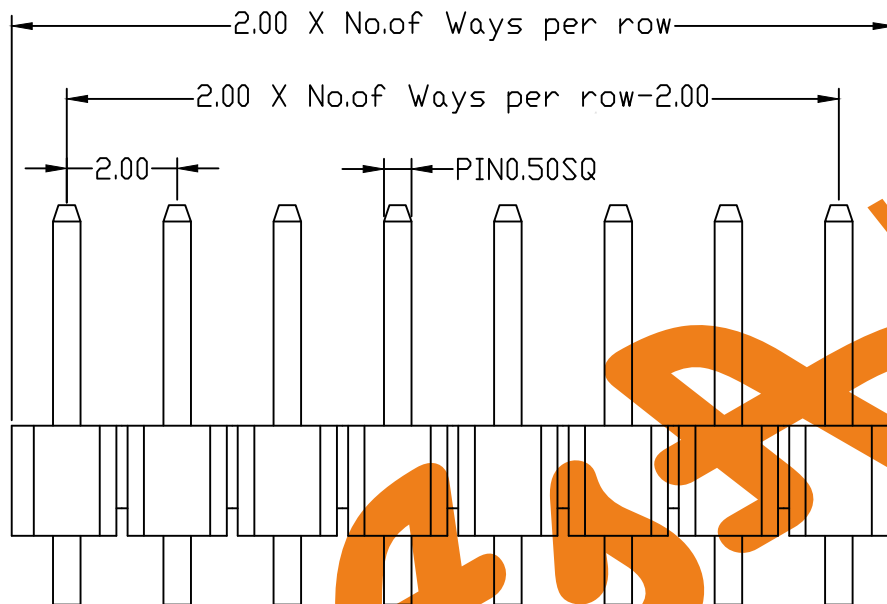


ROHS COMPLIANT

2.00mm Pin Header Single Row AngleType

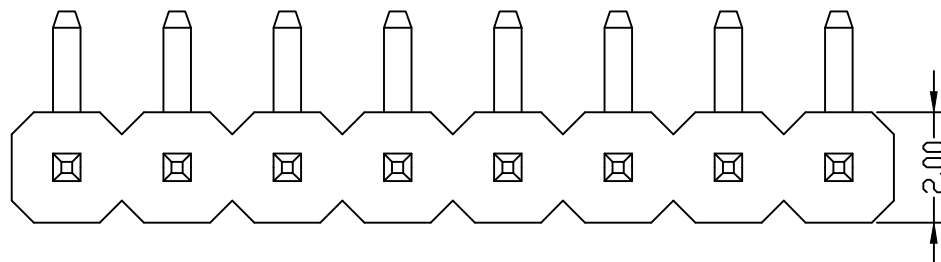

PCB LAYOUT

SPECIFICATION

Current Rating: 1.5 Amp
Insulation Resistance: 5000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65
Contact Material: Brass
Insulator Material: PBT, UL 94V-0 Black

Ordering Code:

PHDR01 - X - X - S - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No. of Contacts
01 To 40

③ Contact Plating

G0: Gold flash
G1 :3u" Gold
G2 :5u" Gold
G3 :10u" Gold
G4 :15u" Gold
G5 :30u" Gold
SN: Tin

④ Connector Type
S: Single

⑤ Pin Length:

A+B+D+H1/H2+1.00

Please mark the desired length in the A/B/D

⑥ Insulator Material

A: PBT
B: PA6T
C: LCP
D: PA46

⑦ Packing

A: Tray
B: Bag
T: Tube

⑧ Plastic High

H1: 1.5mm
H2: 2.0mm


Unless Otherwise specified tolerance

A	B	D
4.0	2.8	0.75
Optional		

SCALE:
As ShownUNIT:
mm

DRAWN: junfon H

CHECKED: YANG



WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

TITLE:

2.00mm Pin Header Single Row Angle Type

DRAWING NO:

PHDR01-XXSXXXX

PRODUCT NO:

PHDR01-XXSXXXX

Add option of plating

10/8/1

DESCRIPTION

DATE

REV