

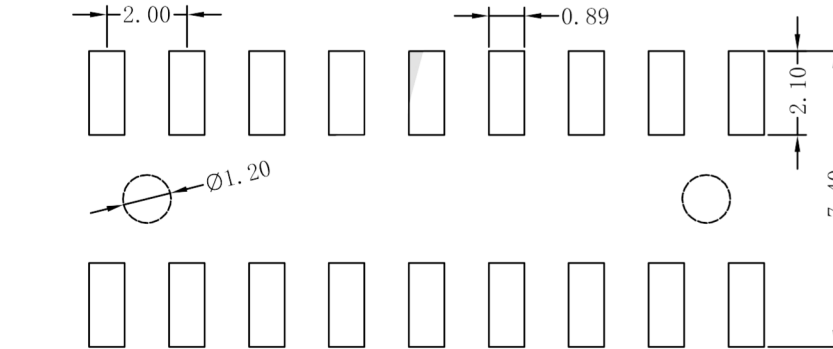
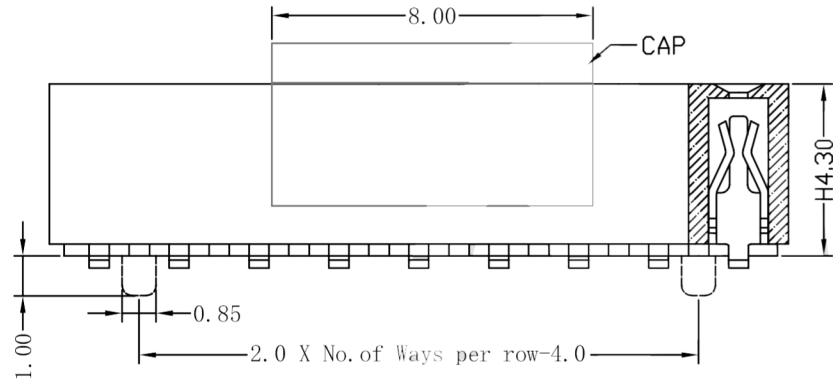


ROHS COMPLIANT


2.00mm Female Header Dual Row SMT Type(W=6.2 H4.3)

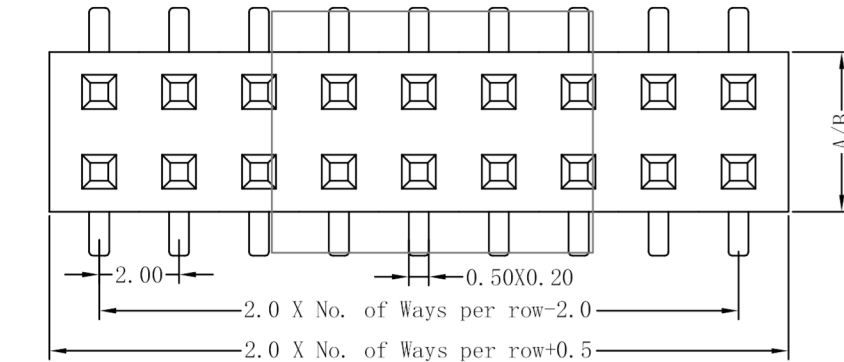

PCB LAYOUT



W/O locating pegs
A=TypeA



With locating pegs
B=TypeB

SPECIFICATION

Current Rating:	1.5Amp
Insulation Resistance:	5000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PBT,UL 94V-0 Black

Ordering Code:

FHDM12 - X - X - D - X - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:
- ② No. of Contacts
02 To 80
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
D: Dual
- ⑤ Plastic High:
H: 4.3
Please mark the desired length in the H
- ⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
- ⑦ Packing
A: Tray
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
- ⑧ Special Function
A: Type A
B: Type B
- ⑨ Plastic Wide:
A: Width=4.5mm
B: Width=4.0mm

Unless Otherwise specified tolerance

X:±0.35
X.X:±0.25
X.XX:±0.20
X.XXX:±0.15

SCALE:
As Shown

UNIT:
mm

DRAWN: junfon H

CHECKED: YANG



WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

TITLE:

2.00mm Female Header Dual Row SMT Type

DRAWING NO: FHDM12-XXDXXXXX

PRODUCT NO: FHDM12-XXDXXXXX

Add option of plating

10/8/1

DESCRIPTION

DATE

REV