
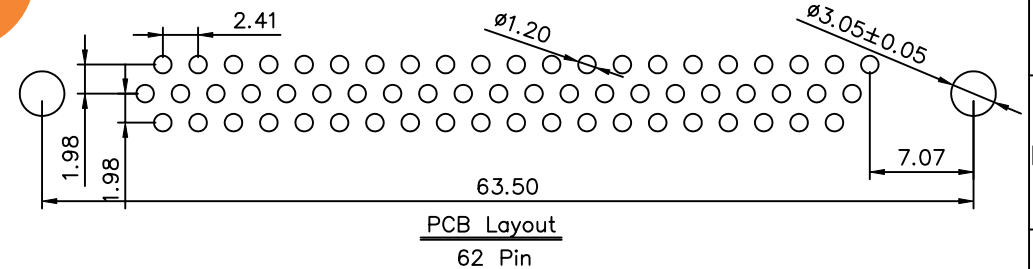
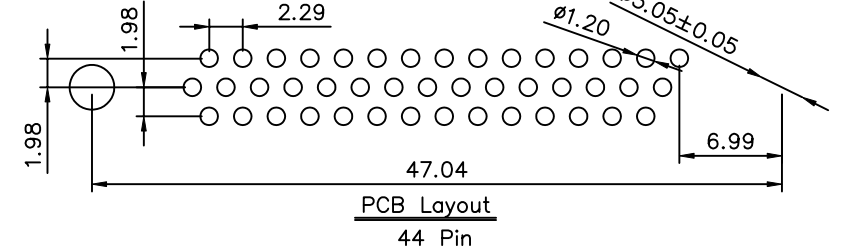
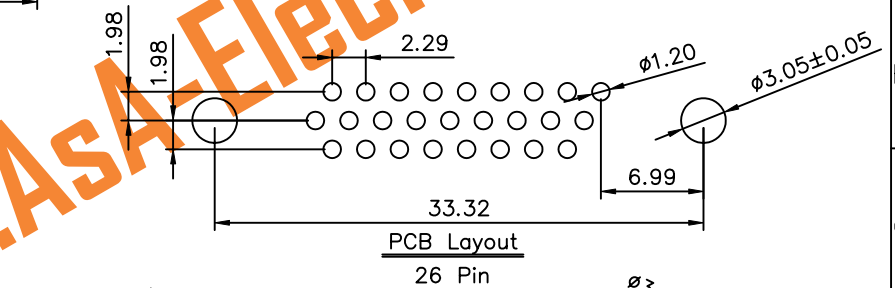

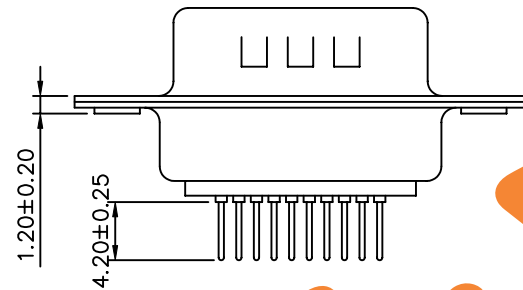
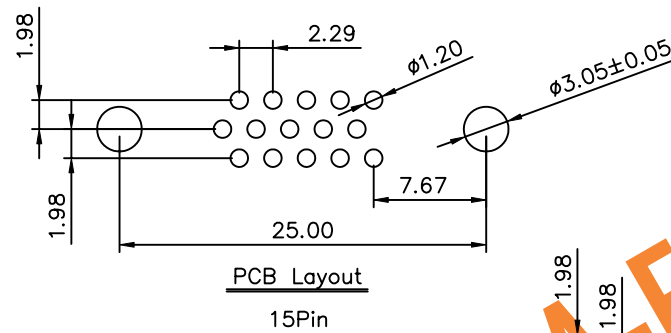


SPECIFICATION

Current Rating: 1A Max
Dielectric Withstanding Voltage: 500V(AC)
For 1 Minute

Contact Resistance: 30 Milliohms Max
Insulation Resistance: 1000 Megohms Min
At DC 500V

Temperature Range: -55°C ~ +105°C
RoHS Compliant

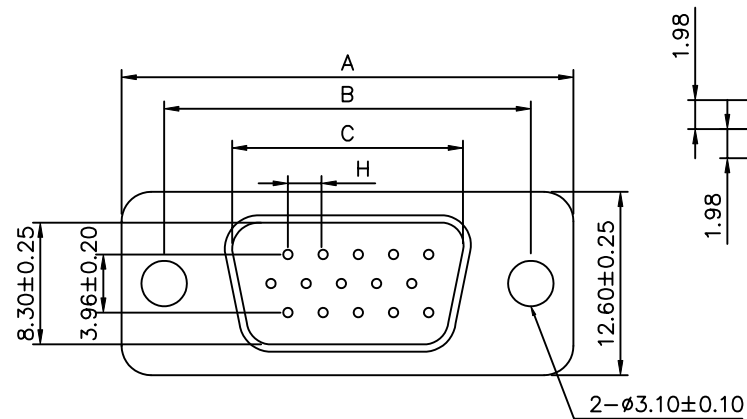

4	Back-Shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-Shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
2	Contact	15~62	Brass	T=0.20mm	Gold Flashed
1	Housing	1	P.B.T	UL94V-0	White
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

Position	A±0.25	B±0.25	C±0.25	H±0.20
15	30.80	25.00	16.92	2.29
26	39.20	33.32	25.25	2.29
44	53.05	47.04	38.96	2.29
62	69.40	63.50	55.42	2.41



WWW.ASA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWING No.

telegram:
09396994470

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HYY

REV.

B0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.3
.XX ±0.20
.XXX ±0.100
ANG. ±1°

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

HZF

CHK

11/13/2008

DATE