
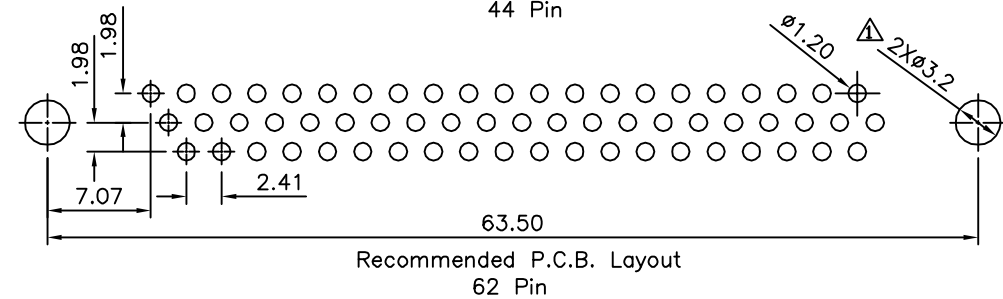
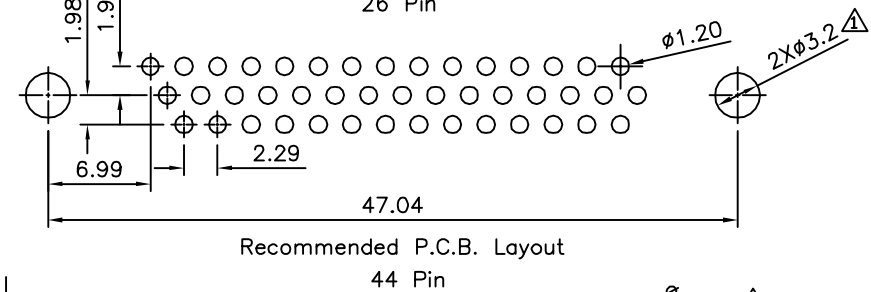
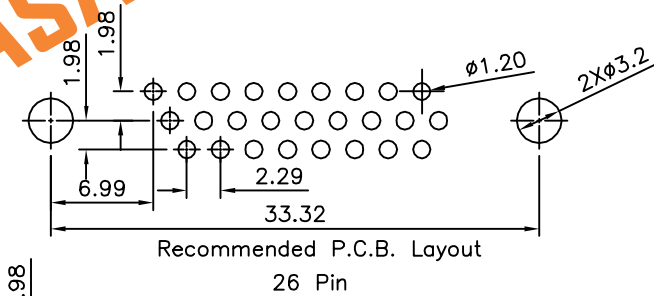

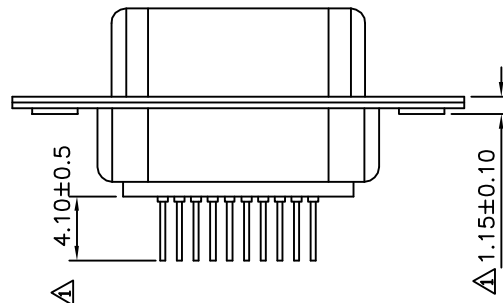
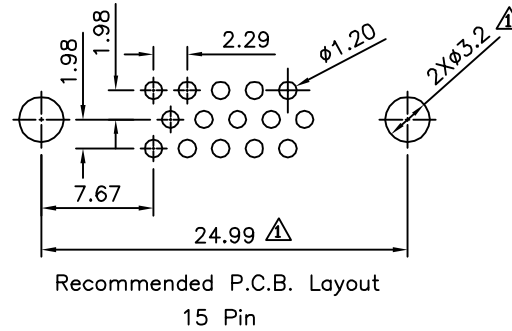


SPECIFICATION

Current Rating: 1A Max
 Dielectric Withstanding Voltage: 500V(AC) For 1 Minute
 Contact Resistance: 30 Milliohms Max
 Insulation Resistance: 1000 Megohms Min At DC 500V
 Temperature Range: -55°C ~ +105°C
 RoHS Compliant

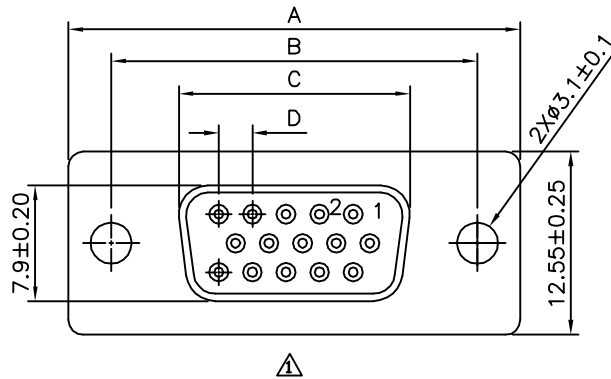

Pin	A±0.25	B±0.20	C±0.20	D±0.05
15	30.81	24.99	16.33	2.29
26	39.25	33.32	24.66	2.29
44	53.04	47.04	38.38	2.29
62	69.50	63.50	54.84	2.41

4	Back-Shell	1	Cold Rolled Steel	Tin Plated
3	Front-Shell	1	Cold Rolled Steel	Nickel Plated
2	Contact	15~62	Copper Alloy	Gold Flash Over Nickel
1	Insulator	2	PBT, UL94V-0	White
No.	Name	Q'ty	Material	Remarks



WWW.ASA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

telegram:
09396994470

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY YBL

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.3
 .XX ±0.20
 .XXX ±0.100
 ANG. ±1°

SCALE NONE

REV.

B1

UNIT mm



NO. REV.

REVISIONS

CHK

DATE

B1 Modify Data HZF 11/23/2013

B0 NEW RELEASE HZF 11/18/2008