



Recommended P.C.B. Layout



SPECIFICATION
 Current Rating: 1A Max.
 Dielectric Withstanding Voltage: 500V AC For 1 Minute
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min. At DC 500V
 Temperature Range: -55°C~+105°C
 Housing: PBT(UL94V-0), White
 Contact: Brass, Gold Flash Over All, Over Nickel
 Front Shell: Cold Rolled Steel, Nickel Plated Over Copper
 Back Shell: Cold Rolled Steel, Tin Plated Over Copper
 RoHS Compliant

Pin	A	B	C
50	67.10	61.00	52.20

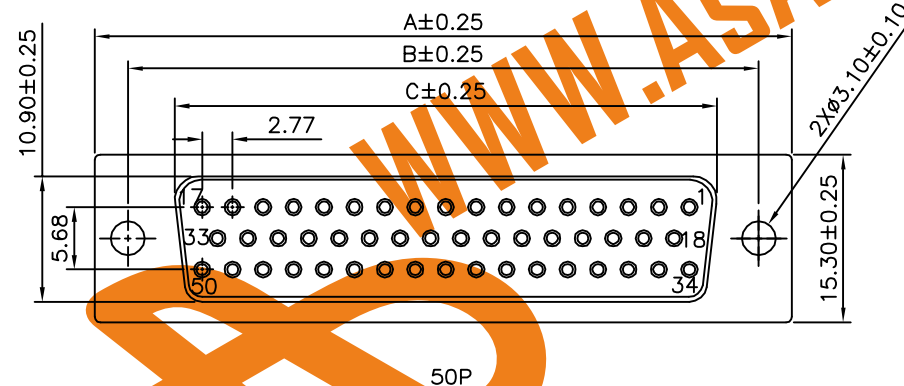

WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

telegram:
09396994470

APPROVED BY MEI
 CHECKED BY H.Z
 DRAWING BY SONG

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±1°

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	03/19/2012

SCALE NONE

REV. A0