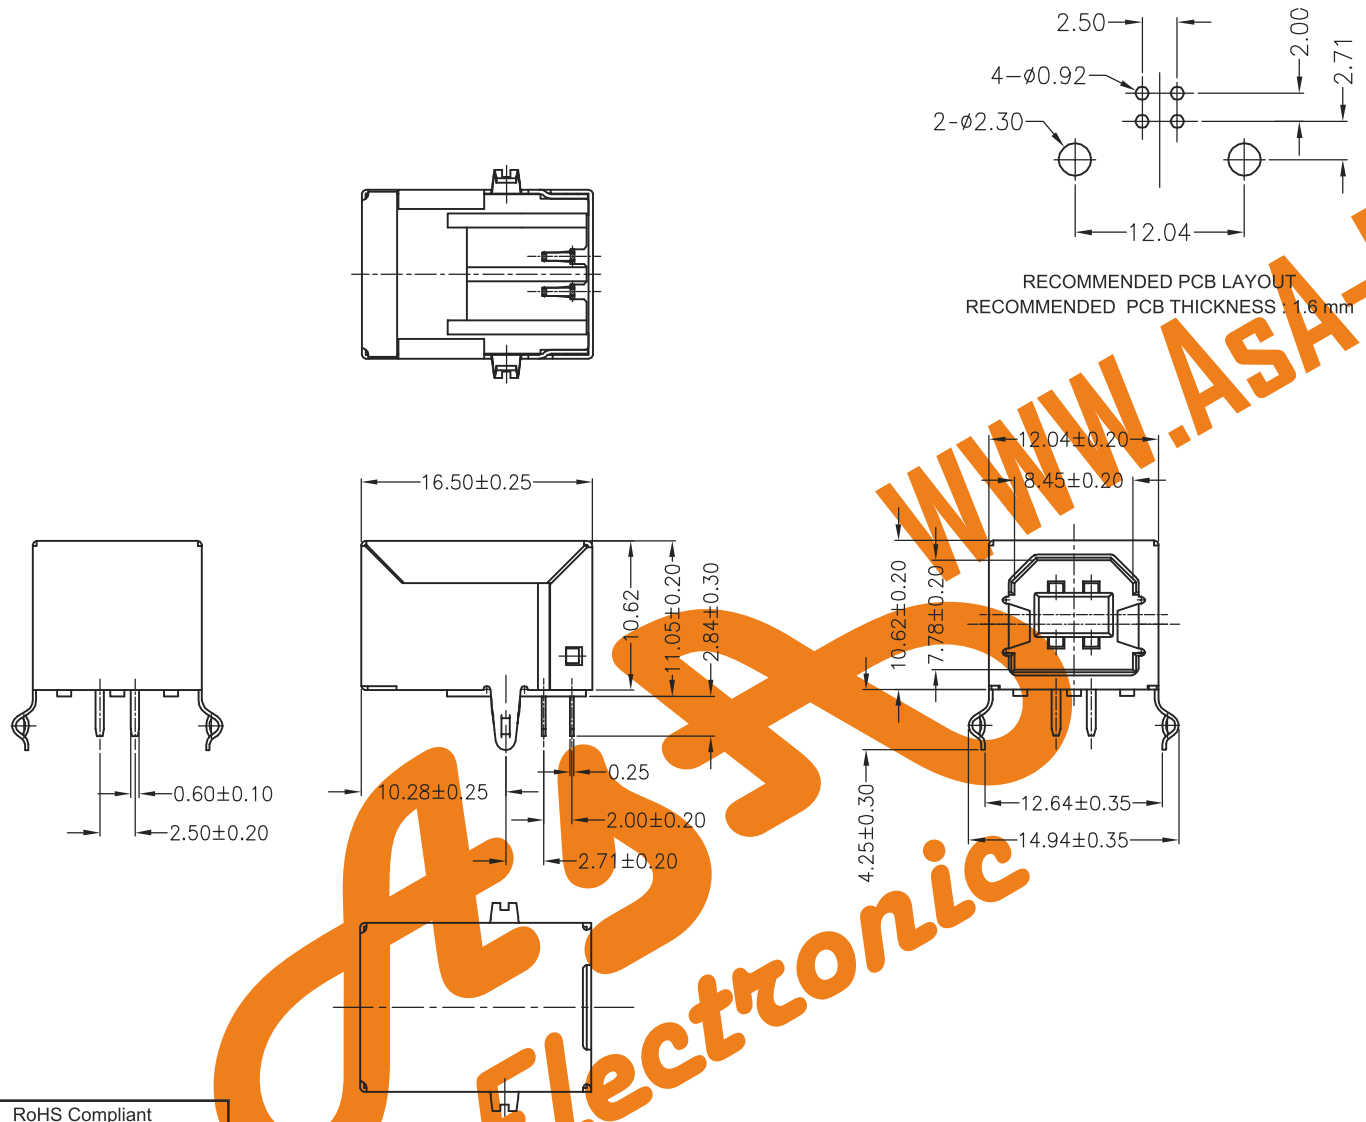

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PBT
FLAMMABILITY RATING: UL94-V0
COLOR: WHITE
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: BRASS Ni PLATED
QUALITY CLASS: 1500 MATING CYCLES

ENVIRONMENTAL
OPERATING TEMPERATURE:-40°C UP TO +105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.5 A MAX
WORKING VOLTAGE: 30 V
INSULATOR RESISTANCE: >1000 MΩ
DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC/MIN
CONTACT RESISTANCE: 20 mΩ MAX

STANDARD
CERTIFIED: E323964

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
TRAY

WWW.AsA-Elec.com
AsA Electronic
WWW.AsA-Elec.com
AsA Electronic Co.
Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
Telegram:09396994470

RoHS Compliant

REV	DATE	FILE	BY
R	10-NOV-16	PCN	AK
Q	11-AUG-15	PCN	QP
P	09-AVR-15	PCB THIKNESS	QP
O	27-OCT-14	REVIEW	QL

PROJECTION:

APPROVAL: NPr

GENERAL TOLERANCE
.X = +/- 0.25
.XX = +/- 0.20

UNIT: MM
SCALE:
SHEET:
DRAW: QL

DESCRIPTION: USB 2.0 TYPE B

SIZE
A4