



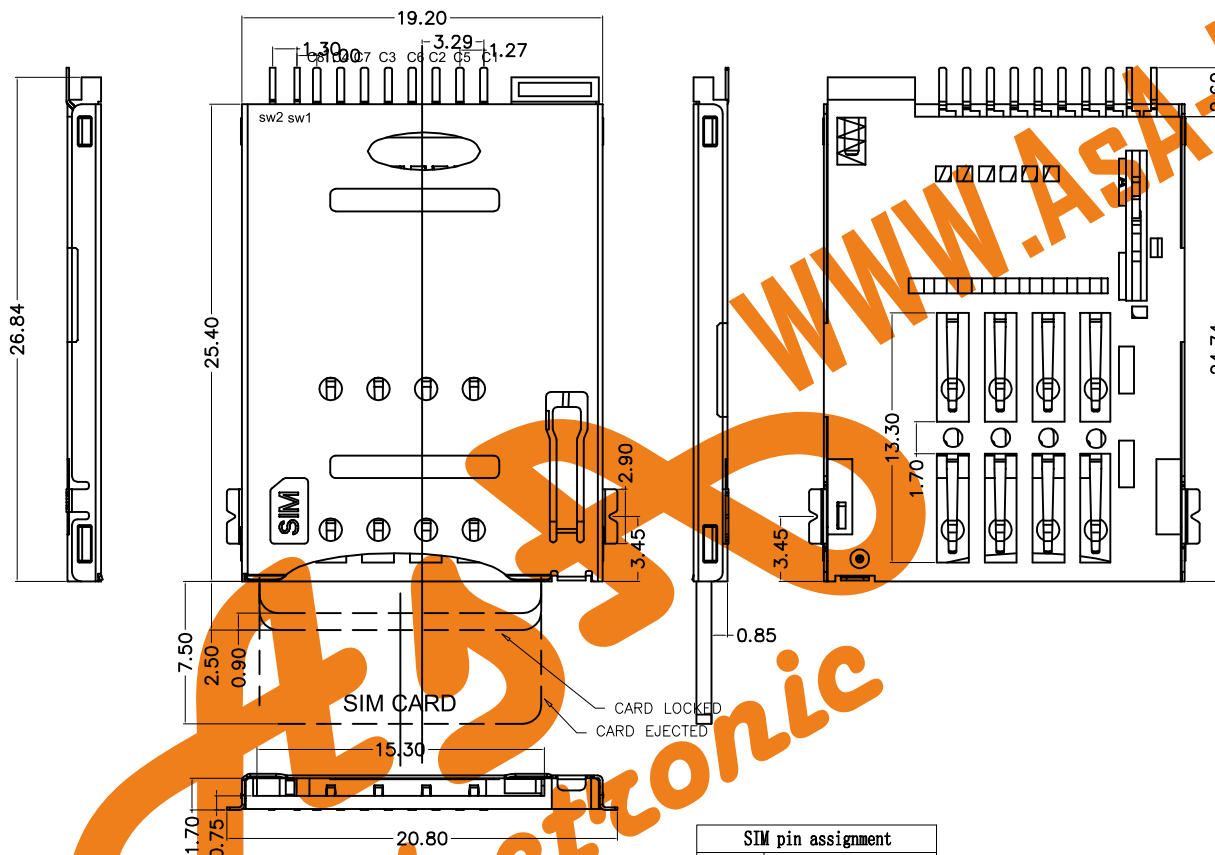

WWW.ASA-Elec.com

AsA Electronic Co.


Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02



- 1.SPECIFICATIONS
INSULATION RESISTANCE: 500M min.AT DC 500V DC
WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
CONTACT RESISTANCE: 100M max. AT 10mA/20mV max
CURRENT RATING: 0.5A
VOLTAGE RATING: 5.0 vrms
OPERATING TEMP RANGE:-55 C+85 C
MATING CYCLES: 5000 INSERTIONS

- 2.MATERIALS
INSULATOR: H-TEMPERATURE PLASTIC,UL 94V-0,
COLOR:BLACK
TERMINAL: COPPER ALLOY,T=0.15mm
SHELL: STAINLESS STEEL,T=0.15mm

- 3.FINISH:
TERMINAL:50u" min NICKEL UNDERPLATED ON ALLOVER,GOLD PLATING
ON CONTACT ARER, 80u"min TIN ON SOLDER TAIL
SHELL:50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH ON SOLDER
LATCH

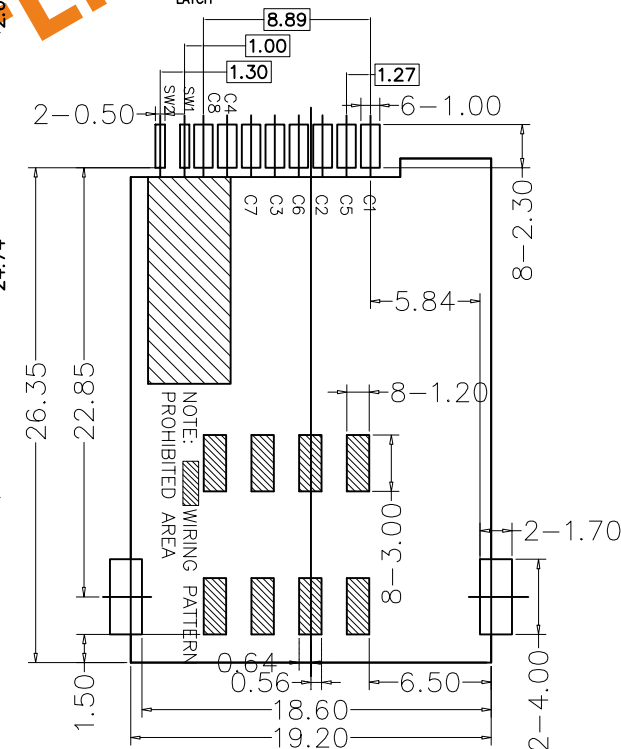

RECOMMENDED PCB LAYOUT

CIRCUIT:



WITHOUT SIM CARD

SIM CARD INSERTED

SIM pin assignment

PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved


Telegram:09396994470

DIMENSIONS INIT: mm
UNLESS OTHERWISE SPECIFIABLE
DIMENSION TOLERANCE
X.X: ± 0.25
X.XX: ± 0.10
X.XXX: ± 0.05
ANGULAR: ± 1°

PRODUCT NAME :
SIM PUSH 8P+2 SMT

PRODUCT NO. :
0081DAAS10A

DRAWING NO. :
XNT-004



DRAWING:

CHECK:

APPROVED:

SCALE:

DATE:
2012/5/10

DATE:
2012/5/10

DATE:
2012/5/10

SCALE:
1:1

DWG ID:
P D

REV.:
A

PAGE:
1 of 1