

REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2008/09/20	/	NEW	Vicky

Remarks:

1. Material:

1.1 Housing: LCP UL94V-0

1.2 Terminal: Phosphor bronze, nickel groud 50",
Gold 1u" on contact area plating

1.3 Shell: SUS, nickel groud 50u",
Gold 1u" at solder tail

2. Main Performance:

2.1 Rated current: 0.5A

2.2 Contact resistance: 50mΩ MAX

2.3 Insulation resistance: 100MΩ MIN 100V DC

2.4 Withstanding voltage test: 100V AC

2.5 Solderability: temperature 235±5℃, time 5±0.5s


2.6 Terminal retention force: 0.035kgf MIN

2.7 Life cycle: 5000times

2.8 Withstanding temperature:

oven test: temperature 250±5℃, 2 minutes

2.9 Operating environment: temperature: -30℃~+80℃;
humidity: 80% MAX

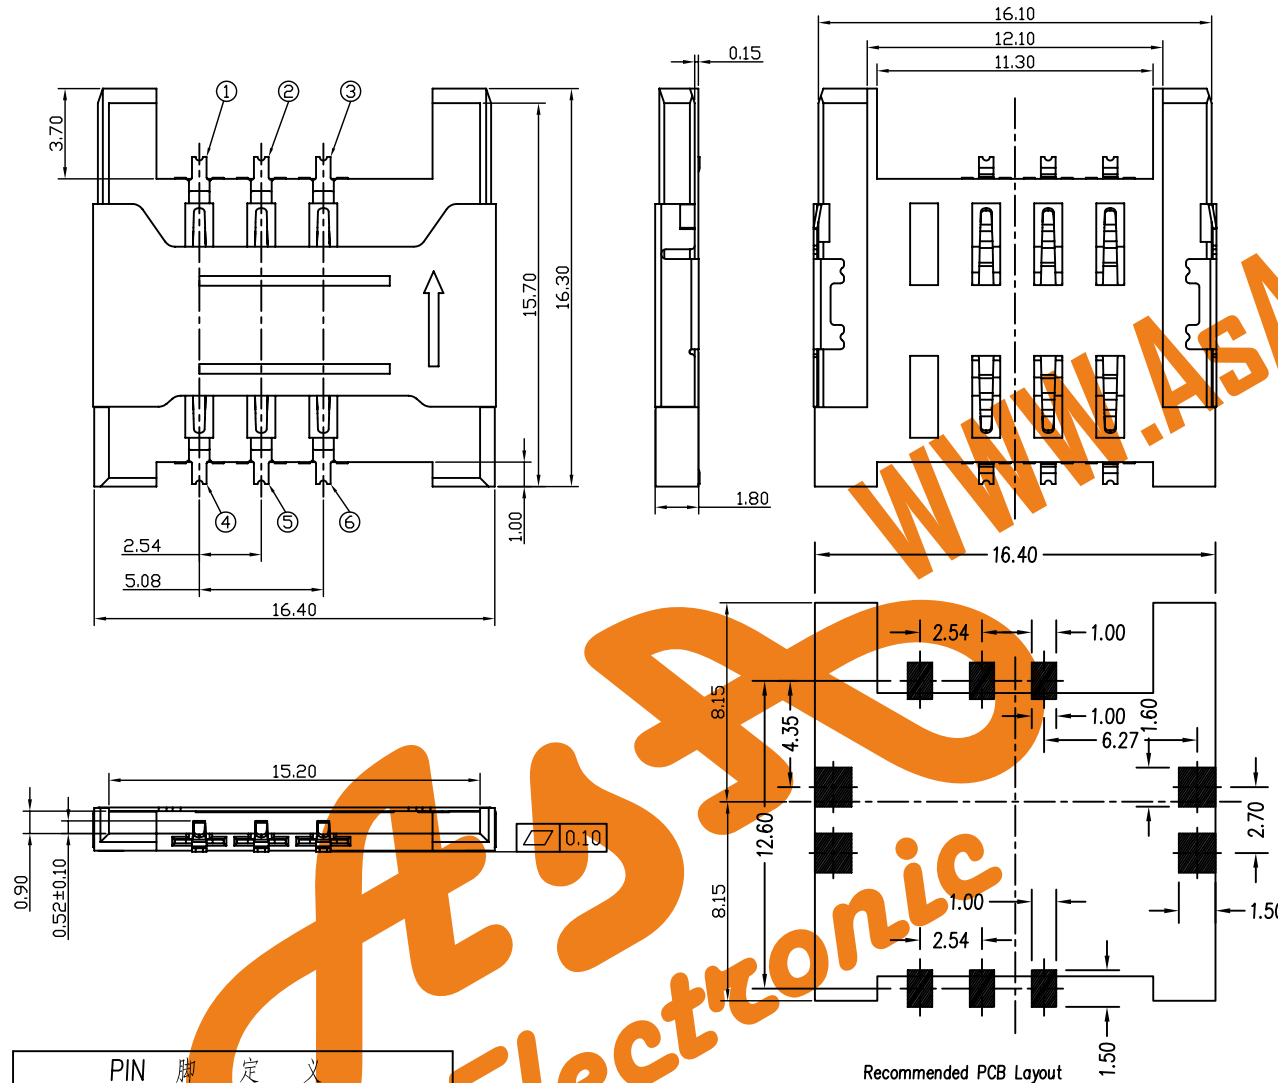

PIN 脚 定 义					
第1PIN	第2PIN	第3PIN	第4PIN	第5PIN	第6PIN
VCC	RESET	CLK	GND	VPP	IO

Telegram:09396994470

AsA
Electronic

WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02