
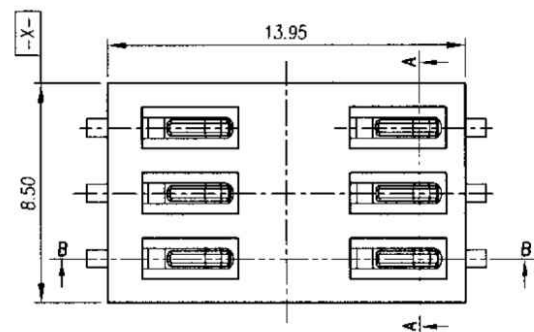
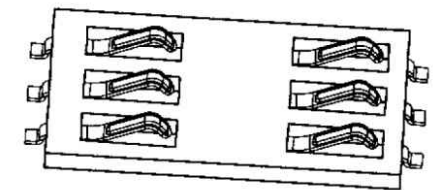
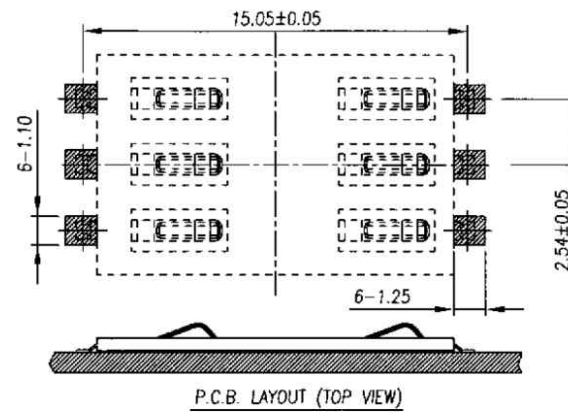


NOTES:

- 1) Material :
Housing : Thermoplastic UL94V-0
Contact : BERYLLIUM C17200R-H,T=0.10mm.
- 2) Plating :
Contact Plating - Gold over 45u" MIN.Nickel
Solder Tail Plating - Gold Flash over 45u" MIN.Nickel
- 3) Contact Forces :
Max. 0.5 N For 0.5mm Contact Deflection.
Min. 0.25 N For 0.5mm Contact Deflection.
- 4) Specification :
Withstanding Voltage:500V AC initial and 250 V AC final at sea level for 1 Minute
Insulation Resistance:1000M Ohms
Voltage Rating:5 Volts Max
Current Rating:10mA Max
Contact Resistance:30m Ohms Max
Operating Temperature:-40°C~+85°C
Insertion Cycles:20,000 Times
- 5) Application:
For SIM Card Use Only

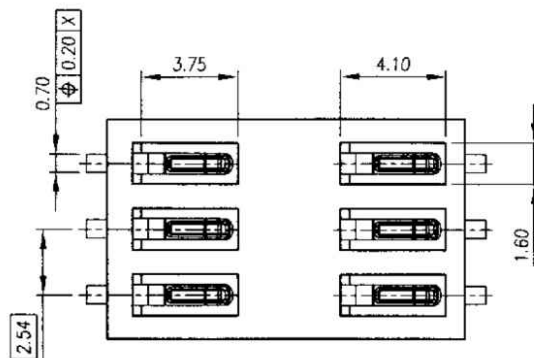

WWW.AsA-Elec.com


AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

SCX-W1505X-06-LF
SERIES | | | LEADFREE
| | | 06WAY
| | | NON POST
90°SMT | | 0.5mm HIGH
PAD TO PAD 15.05mm

Telegram:09396994470