



SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass


Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

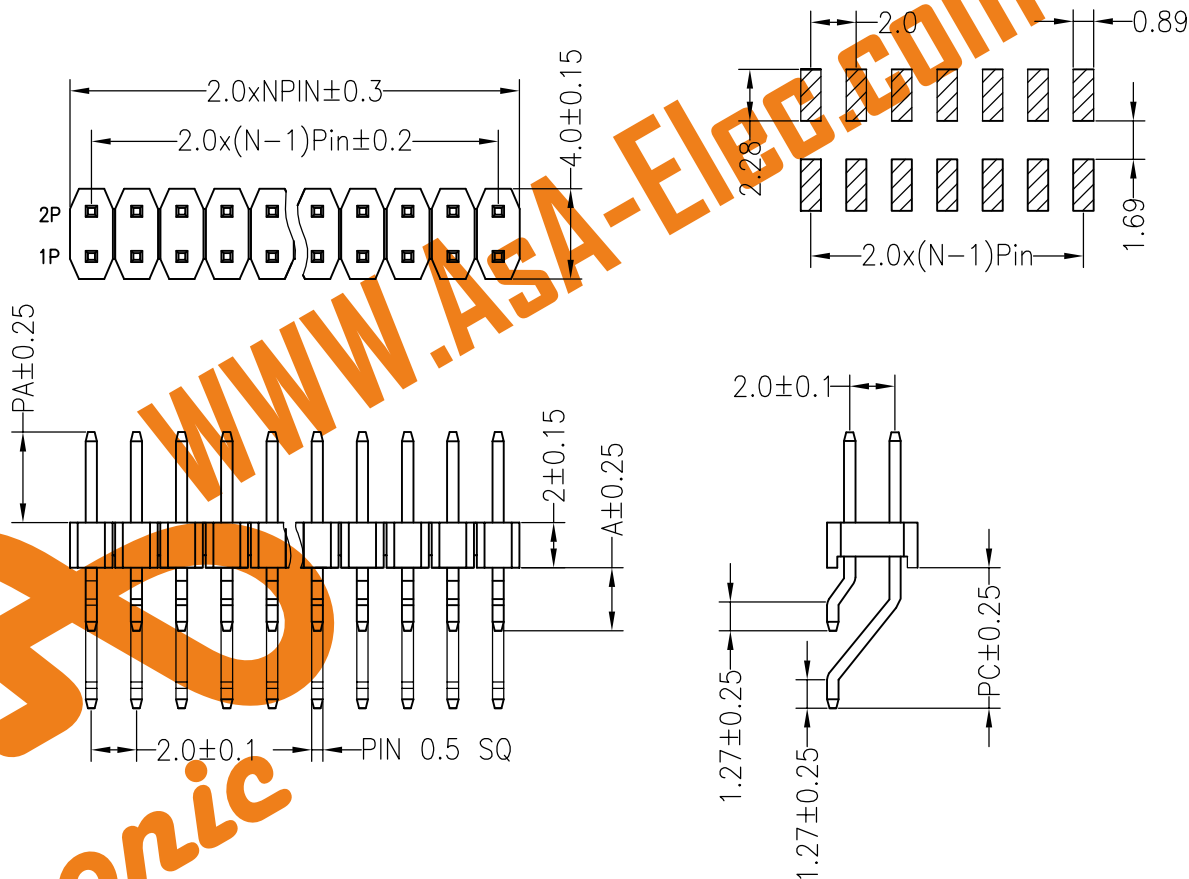

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

Dimension antitheses list

ITEM	PA	A	PC	L短	L长
Standard	3.00	3.40	6.60	8.50	12.50

OPERATION

DRAW

12.04.11

SCALE

FIT

X.X ±0.30

CHECK

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

APPROVE

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

PART NO.

TITLE:

2.0PH 2xNpin H2.00mm 90° SMT

A0 2012.04.11 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE