


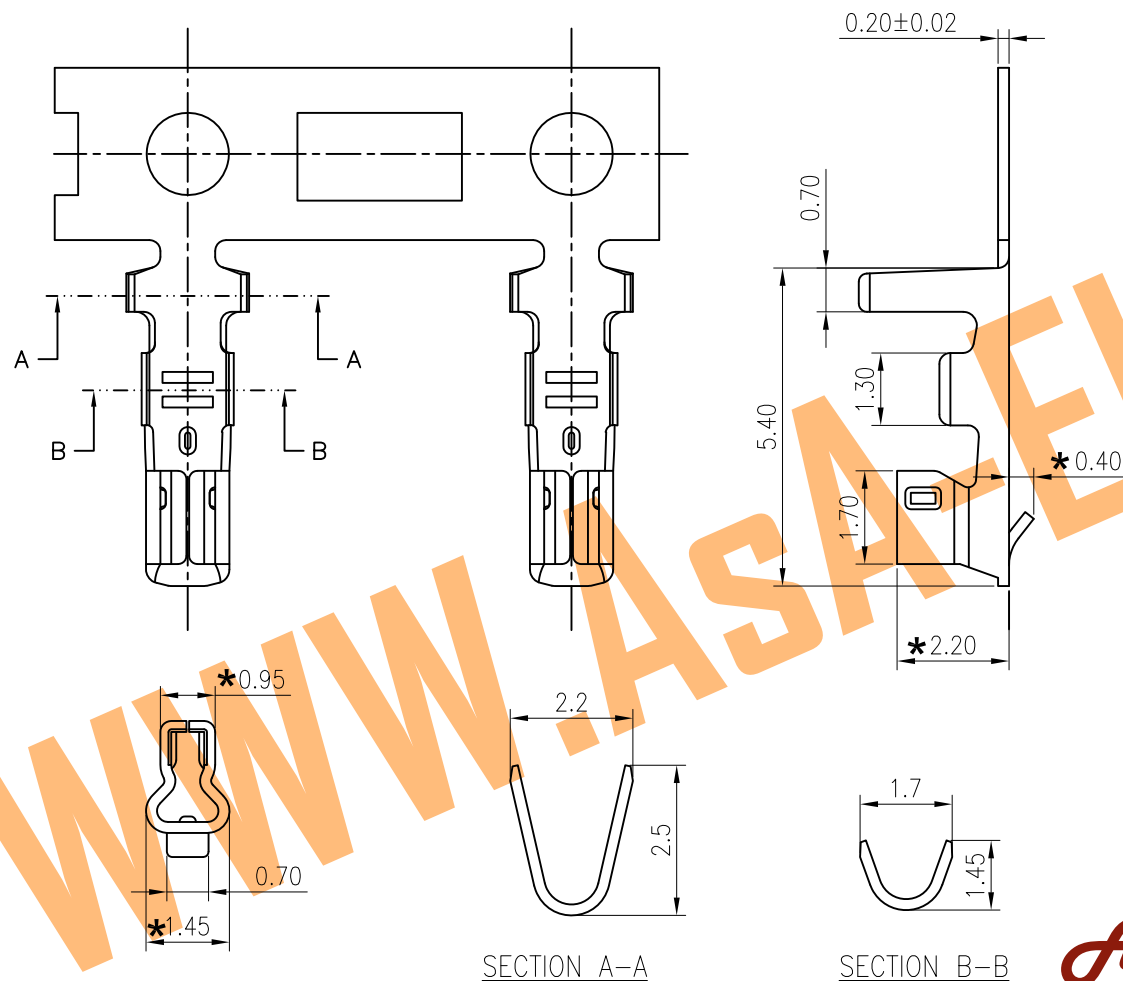

◆ SPECIFICATIONS

- Current rating: 2A AC, DC
- Voltage rating: 100V AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 800V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: Phosphor Bronze or brass

Plating: Tin-plated over nickel

Applicable wires:

AWG #28~#24

Insulation O.D.: 1.5mm Max.

Suitable KR2001 series housing

Q'ty/reel: 10,000PCS

"★"为重点检验尺寸

Ordering Code:

T20010 P *** 01 01A

Material
P: Phosphor bronze
B: Brass

Type
01: 先冲后镀
02: 先镀后冲

Plating

T01: Tin plated
B01: Selective gold plated
G03: gold plated 3u"
S00: Unplated



WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

				TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: PH2.0 Terminal		DRAWN: <i>Arvin 2020.04.28</i>				
							CHECKED:				
	更改料号及图框格式	Arvin	2020.04.28				APPROVED:				
MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION 	REV.:A02	DRAWING NO.: 2001T101-A-S