

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Applicable Wires:

AWG#22~#28


Insulation O.D. : 1.60mm MAX

Material: Phosphor Bronze

Plating: Tin plated over nickel

Suitable KR2500 series housing

Q'ty/reel: 10,000 PCS

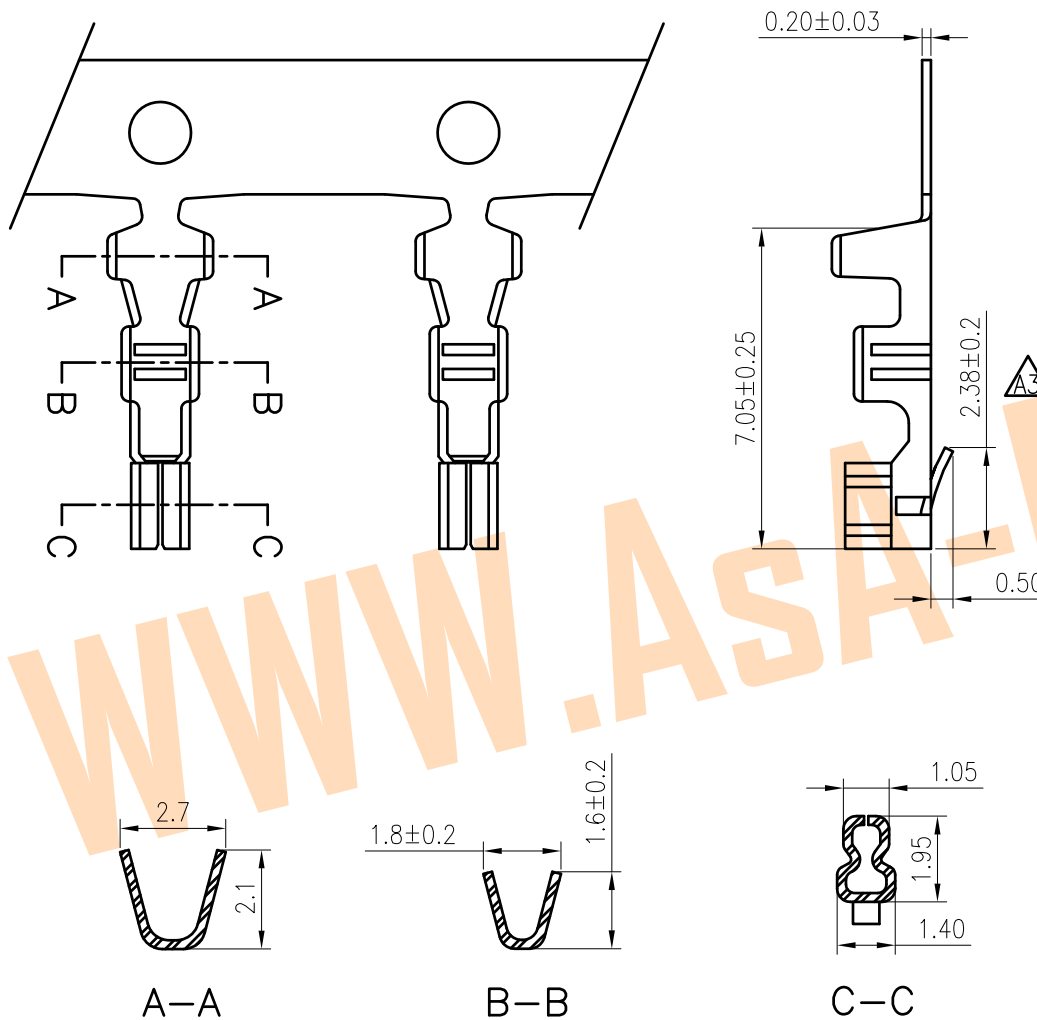

WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

				TOLERANCE	TITLE:		DRAWN: Shen 2022.01.08			
				X.X ±0.30	MX2.5 Terminal		CHECKED:			
				X.XX ±0.20			APPROVED:		PART NO.:T25000PT0101B	
	Uniformly arrange the drawings	Shen	2022.01.08	X.XXX ±0.10			SHEET: 1/1		PROJECTION 	
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	Angle ±2°	UNIT:mm	SCALE:N/A				



Uniformly arrange the drawings

Shen

2022.01.08