


△ SPECIFICATION
 Current Rating: 2A AC/DC
 Voltage Rating: 100V AC/Max.
 Operation Temperature: -25°C To +85°C
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 800V AC/Minute
 Insulator: PA66(UL94V-0), White
 RoHS Compliant



3~16 Pin
 △

WWW.ASA-ELEC.COM

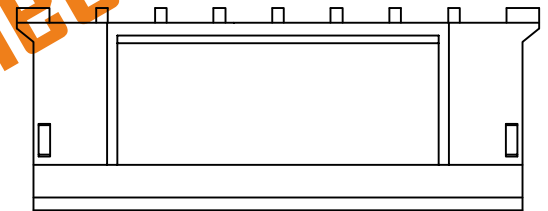

Pin	COLOR	Pin	A	B
1	RED	2	2.0	5.8
2	BLACK	3	4.0	7.8
3	WHITE	4	6.0	9.8
4	YELLOW	5	8.0	11.8
5	GREEN	6	10.0	13.8
6	BLUE	7	12.0	15.8
7	ORANGE	8	14.0	17.8
8	VIOLET	9	16.0	19.8
9	GRAY	10	18.0	21.8
10	BROWN	11	20.0	23.8
11	RED	12	22.0	25.8
12	BLACK	13	24.0	27.8
		14	26.0	29.8
		15	28.0	31.8
		16	30.0	33.8