
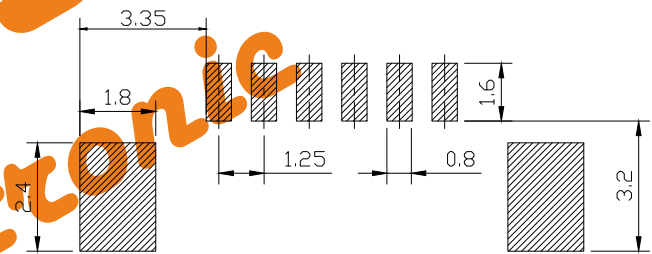
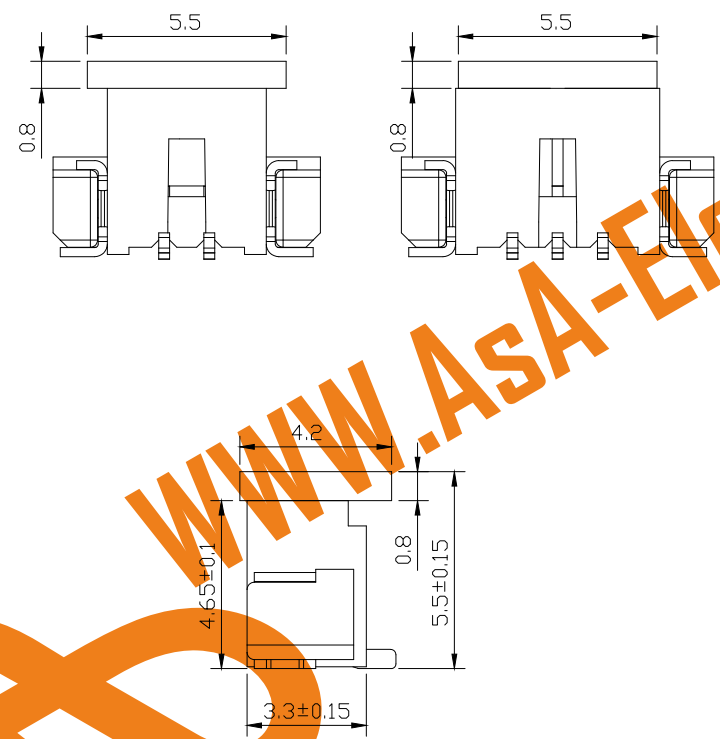
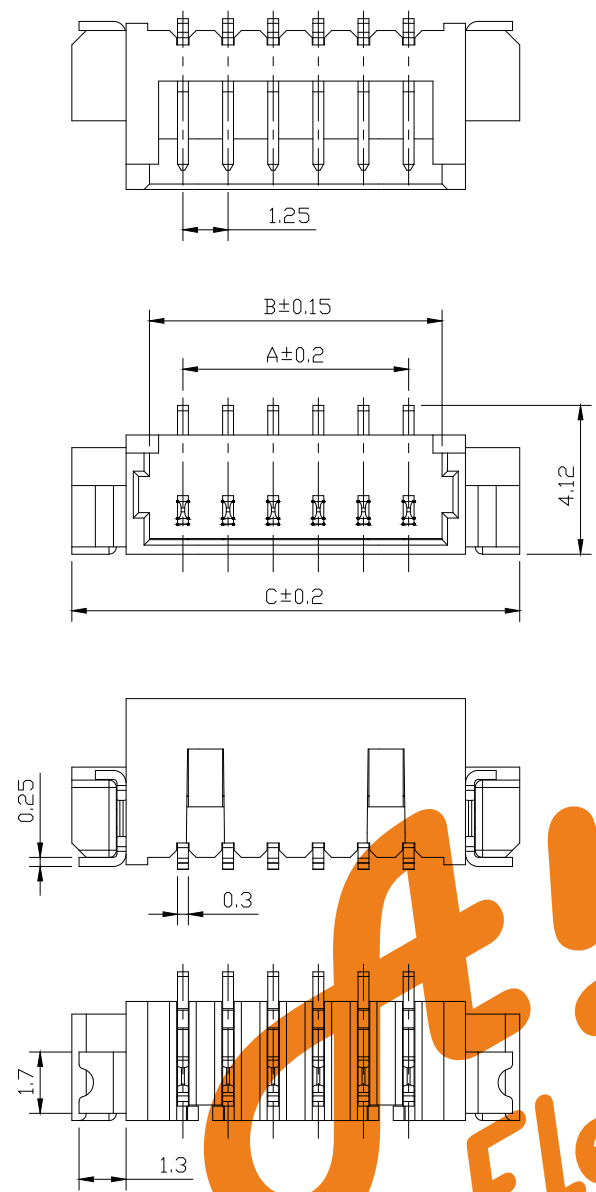


3D View

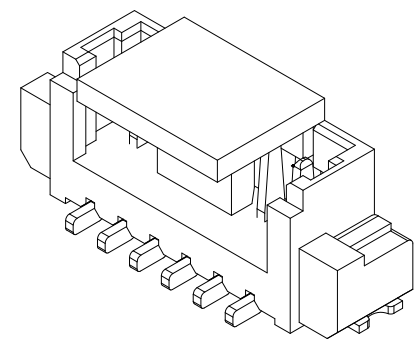

P.C.B LAYOUT

AsA Electronic Co.
Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

29.90	25.60	23.75	20
17.40	13.10	11.25	10
16.15	11.85	10.00	9
14.90	10.60	8.75	8
13.65	9.35	7.50	7
12.40	8.10	6.25	6
11.15	6.85	5.00	5
9.90	5.60	3.75	4
8.65	4.35	2.50	3
7.40	3.10	1.25	2
C	B	A	PIN

Specifications:

Rated Current	1A AC, DC (AWG #28)				角度	±3	设计	日期
Rated Voltage	125V AC, DC				63 < L	±0.3	审核	日期
Contact Resistance	20mΩ max				16 < L ≤ 63	±0.2	核准	日期
Insulation Resistance	1000MΩ min	定位焊片	H65	镀锡	4 < L ≤ 16	±0.1	比例	1:1 视图
Withstanding Voltage	1000V AC/minute	插针	H65	镀锡	1 < L ≤ 4	±0.05	单位	MM 页码 1/1
Temperature Range	-25 C to +85 C	基座	LCP	米黄	L ≤ 1	±0.05	编号	03-09-24-10-35
Applicable wire Range	AWG #32 to #28	部件	材质	颜色	未详细说明之公差	版本		

名称	1.25 闭口立贴针座
型号	1.25-AT