

DIN 41612 Right Angle Plug Type C Connector 128 Positions

ROHS COMPLIANT

SPECIFICATION


Current Rating: 2.0Amp
 Insulation Resistance: 100000MΩ min. at DC 100V
 Contact Resistance: 20MΩ max
 Withstand Voltage: AC 1000V For 1 Minute
 Operating Temperature: -55° C to +105° C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PBT+30%GF UL 94V-0
 Insertion Force: 128 pin max. 120N
 Withdrawal Force: 0.15N min. per individual contact

Ordering Code:

DMR - XX - X - X - X -402

① ② ③ ④ ⑤

- ① Series No:
- ② No. of Contacts
128P 64P
- ③ Termination
B: Right tail length H=3.0mm
F: Right tail length H=4.4mm
M: Right tail length H=13.0mm
- ④ Rows Loaded With Contacts
J: Row a+b+c+d
K: Row a+d
- ⑤ Contact Plating
G0: Gold flash
S0: Gold flash/Ni
G1: 3u" Gold
S1: 3u" Gold/Ni
G2: 5u" Gold
S2: 5u" Gold/Ni
G3: 10u" Gold
S3: 10u" Gold/Ni
G4: 15u" Gold
S4: 15u" Gold/Ni
G5: 30u" Gold
S5: 30u" Gold/Ni
SN: Tin

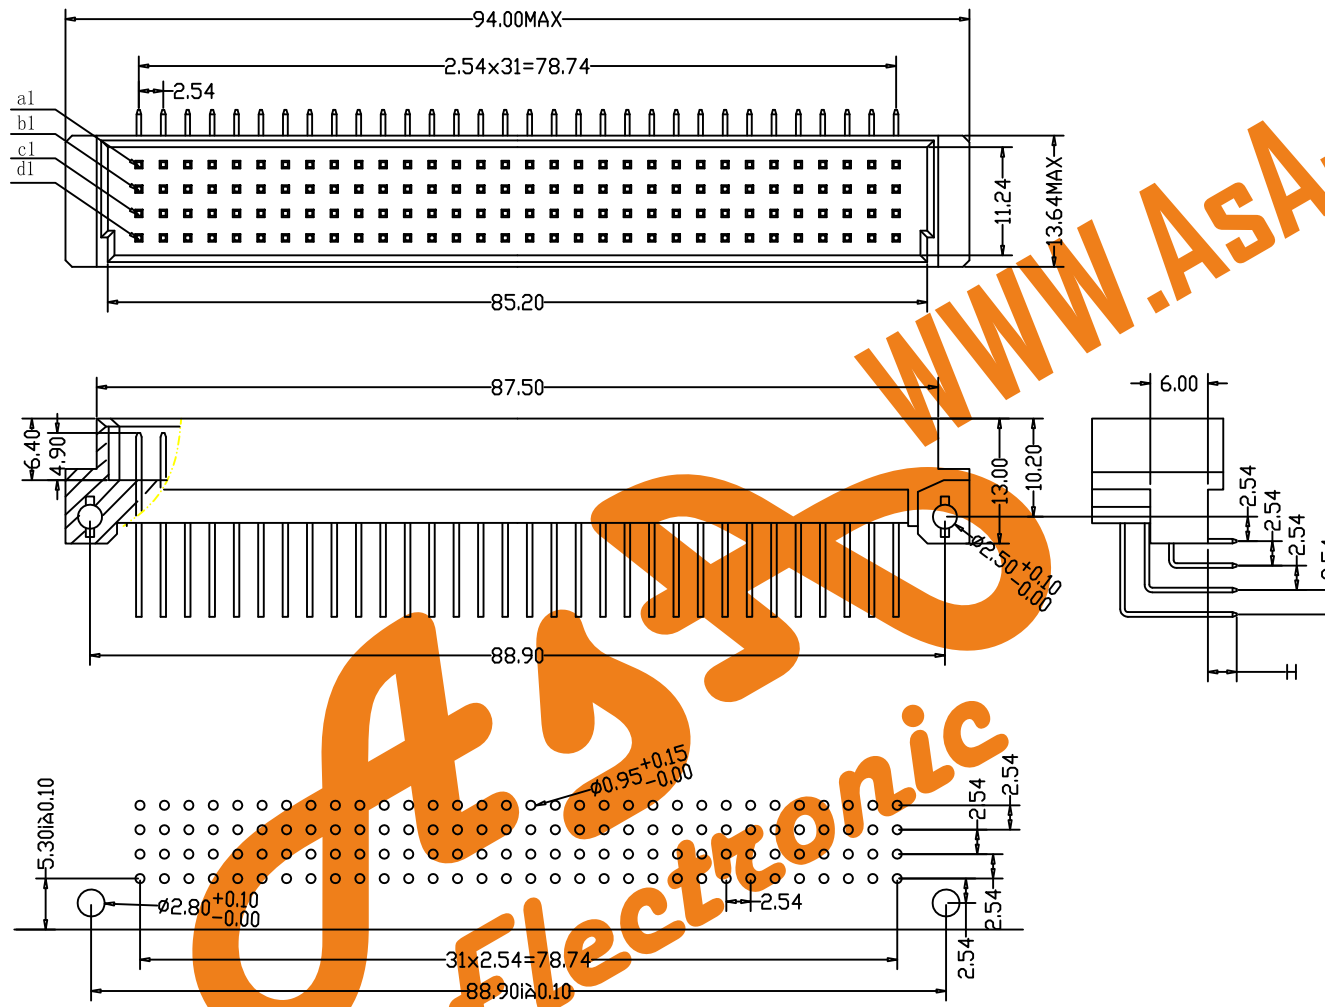

Recommended P.C.B. Layout

Unless Otherwise specified tolerance

X±0.35
 X.X±0.25
 X.XX±0.20
 X.XXX±0.15

SCALE: As Shown

UNIT: mm


AsA Electronic WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWN: iunfon H

CHECKED: YANG



TITLE:
Right Angle Plug Type C Connector 128 Positions

DRAWING NO: DMR-XX-XXX-402

PRODUCT NO: DMR-XX-XXX-402

Add option of plating

10/8/1

DESCRIPTION

DATE

REV