


SPECIFICATION

Current:1.0A Max.
 Voltage:30V Max.
 Withstanding Voltage:100V AC
 Contact Resistance:50 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 Temperature Range:-55°C~+85°C
 Mating Force:35N Max.
 Withdrawal Force:7N Min.
 Durability:5000 Cycles Min.
 Insulator:LCP+30%G.F.(UL94V-0),Black
 Contact:Phosphor Bronze
 Gold Plated 15" On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Shell:Phosphor Bronze,Nickel Plated
 RoHS Compliant
 www.asa-elec.com

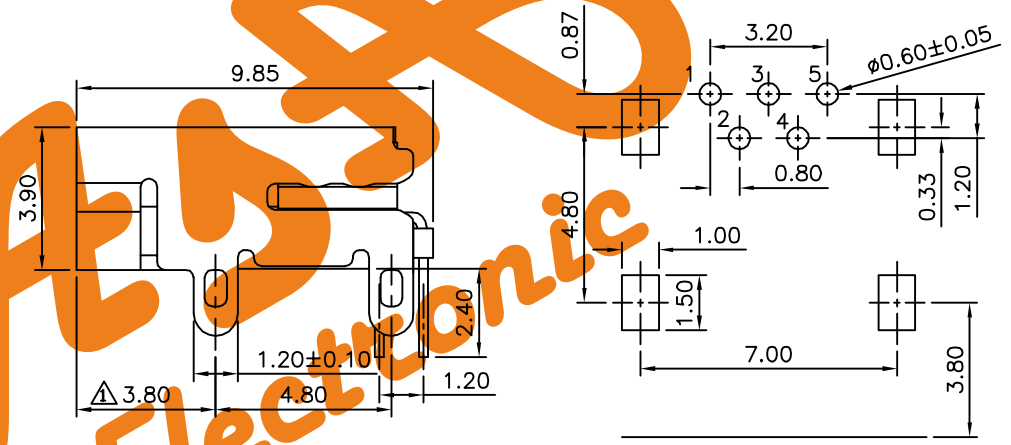

△ Recommended P.C.B. Layout

APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
CHECKED BY HZ		.X ±0.38	.X' ±2.0°
DRAWING BY		.XX ±0.25	.XX' ±1.0°
SCALE NONE		.XXX ±0.13	.XXX' ±0.5°
REV.	A1	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	05/09/2013
△ A0		NEW RELEASE	HZF	01/29/2010